



MOTORSPORT CATALOG

PERFORMANCE RACE SPRINGS



eibach.com



ACTION
SHOCK SERVICE

ENEOS

cbdMD

Ford Motor, Inc.

00

MB



DOMINATE THE TRACK.

For over 60 years, Eibach has dedicated itself to building the finest suspension components in the world. These results are showcased every day in the demanding world of racing, from the legendary Formula 1 circuits and grueling Off-Road races around the world, to the high banked ovals of NASCAR and dirt tracks of America. From Europe's Monza, Silverstone, Nürburgring and LeMans, to Australia's V8 Supercar tracks and the circuits of Asia's CTCC.

As the stakes in racing grow ever higher, competition gets even tougher. Precision, reliability and repeatability assume greater importance, as preparation for winning race efforts become more crucial than ever. Eibach suspension components, which ultimately determine handling, balance and overall performance, must be nothing less than perfect. They must be—**Engineered To Win.**

CONTENT

Eibach Race Spring Systems	4-5
Eibach Accessories	6-10
Coilover (Standard)	12-36
XT Barrel	18-20
Platinum XT Barrel	21
Eibach Racing Off-Road	27-31
Platinum Front	32
Conventional Front	32-33
Stock Car & Platinum Rear	34
Conventional Rear	35-36
6th Coil Spring & Pull Bar Spring	36
Metric	37-45

EIBACH RACE SPRING SYSTEMS

PERFORMANCE PERFECTED

- Ultra-Lightweight for Reduced Unsprung Mass
- Maximum Travel in Combination with Smallest Block Heights
- Exceptional Block Resistance and Durability
- Precision Tolerances–The Tightest in the Industry
- Precision Planparallel and Square End Configurations Under Unloaded and Loaded Conditions to +/- 1 Degree
- Lowest Side Loads with Load Center Ideally Located Relative to Spring Axis
- Highest Linearity and Guaranteed Rate Consistency Within 2% Of Advertised Rate
- Each Spring Individually Tested and Rated
- Eibach Springs Lifetime Warranty

Eibach produces the finest racecar springs in the world. Period. When other springs sag, or need frequent replacement, top race teams, from F1 to WRC, from Le Mans to NASCAR, inevitably turn to Eibach. And, also inevitably, wonder why they didn't choose Eibach in the first place.

To produce springs with unparalleled precision and repeatability, Eibach uses the world's finest Hi-Ten spring steel, produced to exceedingly precise tolerances—according to Eibach specs.

We use world-renowned German CNC coilers, as well as many machines engineered and built specifically by Eibach. In short, we use state-of-the-art technology, in every step of the manufacturing process.

But it's not just about machines and technology: it's about people. Most notably, the Eibach Springmeisters, working at production plants in Germany and the USA: Talented, expert craftsmen, each committed to creating the finest race springs in the world.

EIBACH DOUBLE-SPRING SYSTEM

Suspension tuning is a precise balance. On one hand, the spring system should be soft enough to absorb track irregularities assuring maximum adhesion, while on the other hand the spring system must be firm enough to reduce the body roll, squat, and dive of the vehicle during cornering, acceleration and braking. For optimum balance, Eibach has developed the ERS double-spring system.

By combining Eibach Main, Tender and/or Helper springs, the suspension engineer or weekend racer can create the perfect combination of spring rates for the ultimate suspension set-up. With our extensive range of motorsport spring sizes and rates—our ERS double-spring system is unsurpassed in performance and flexibility. For Off-Road racing where extreme wheel travel is a must—combining two different rate main springs gives you the softer rate required for small bumps and a stiffer final rate to prevent bottoming on the bigger bumps and jumps.

See our offroad guide on eibach.com > **technical** for theory and formulas.



EIBACH MAIN AND TENDER SYSTEM

The Eibach Main and Tender spring concept provides a softer initial rate when both springs are compressed together, then delivers the desired firmer final rate once the tender spring closes completely. The Main spring has a linear-rate characteristic and determines the final rate of the system. The Tender springs are available in linear or progressive-rate and determine the initial rate of the spring-system.



EIBACH MAIN AND HELPER SYSTEM

A Helper spring is used to prevent the Main spring from becoming loose in the spring seat when the suspension is unloaded or at full droop. The Helper spring, unlike the Tender spring, has very little spring rate, and therefore has no effect on the suspension characteristics of the vehicle. Up to 6" (150mm) of spring-to-perch gap can be covered with the use of a Helper spring.



EIBACH MAIN AND SPRING RUBBER

The Eibach Main and Spring Rubber system allows you to add progressive rate to your linear Main spring allowing you to precisely tune your spring characteristics on the track without having to disassemble any suspension components saving you important setup time.



EIBACH MAIN AND BUMP SPRING

Through on-track development, we've engineered a spring and cap system light weight and compact enough to fit Pavement Series setups, with maximum amounts of linear travel needed for Dirt Series Racers. The Consistent performance of the Eibach BUMP-SPRING System translates to increased aero efficiency, maximum grip and superior control at the limit.

EIBACH ACCESSORIES



SPRING BAGS | Keep the Dirt Out

- Made from Lightweight Material
- Eliminates Mud Packing Inside Coils
- Keeps Spring Adjuster and Damper Shaft Clean
- Extends Damper Life
- Reinforced Wear Bars for Long Life
- Washable Material
- Easily Opened for Shock & Spring Adjustment

Part Number	Quantity	Spring Diameter		Spring Length	
		inch	mm	inch	mm
SPRING BAGS (Nylon)					
Protective Spring Bags-Pair (Fits 1.88" Springs)					
ESB12.188	2	1.88	48	10-12	254-305
Protective Spring Bags-Pair (Fits 2.25" Springs)					
ESB12.225	2	2.25	57	10-12	254-305
Protective Spring Bags-Pair (Fits 2.50" Springs)					
ESB10.250	2	2.50	64	8 - 10	203-254
ESB12.250	2	2.50	64	10 - 12	254-305
ESB14.250	2	2.50	64	12 - 14	305-356
ESB16.250	2	2.50	64	14 - 16	356-406
Protective Spring Bags-Pair (Fits 3.00" Springs)					
ESB12.300	2	3.00	76	10 - 12	254-305
ESB14.300	2	3.00	76	12 - 14	305-356
ESB16.300	2	3.00	76	14 - 16	356-406
Protective Spring Bags-Pair (Fits 5.00" Springs)					
ESB14.500	2	5.00	127	12 - 14	305-356
ESB16.500	2	5.00	127	14 - 16	356-406
Protective Spring Bag (Fits Pull Bar Springs)					
ESB875.500	1	5.00	127	8.75	222
Protective Spring Bag (Fits Pull Bar Springs)					
ESB5.400	1	5.00	127	4	102
SPRING BAGS (Neoprene)					
Protective Spring Bags-Pair (Fits 2.50" Springs)					
ESBN18.250	2	2.50	64	18 - 20	457-508
ESBN20.250	2	2.50	64	20 - 22	508-559
ESBN22.250	2	2.50	64	22 - 24	559-610
ESBN26.250	2	2.50	64	26 - 28	660-711
ESBN30.250	2	2.50	64	30 - 32	762-813
Protective Spring Bags-Pair (Fits 3.00" Springs)					
ESBN14.300	2	3.00	76	12 - 14	305-356
ESBN16.300	2	3.00	76	14 - 16	356-406
ESBN20.300	2	3.00	76	20 - 22	508-559
ESBN22.300	2	3.00	76	22 - 24	559-610
Protective Spring Bags-Pair (Fits 3.75" Springs)					
ESBN16.375	2	3.75	95	14 - 16	356-406
ESBN20.375	2	3.75	95	20 - 22	508-559
ESBN24.375	2	3.75	95	22 - 24	559-610
ESBN28.375	2	3.75	95	26 - 28	660-711
ESBN32.375	2	3.75	95	30 - 32	762-813



COIL SLEEVE | Critical Spring Tuning

- Eliminate Frame Drag while using Softer Spring Rates
- Allows Critical Travel Adjustability without Rate Change
- Spring Stays Linear
- Durable-Will Withstand 2500LBS of Load
- Includes Adhesive Strip to Stay in Place

Part Number	Quantity	Spring Diameter Range		Spring Wire Diameter Range		Coil Sleeve Length	
		inch	mm	inch	mm	inch	mm
Coil Sleeve (Fits 2.50" Springs)							
CS3001	1	2.50 - 3.50	64 - 89	0.423 - 0.541	10.75 - 13.75	10.31	262
CS3002	1	2.50 - 3.50	64 - 89	0.551 - 0.650	14.00 - 16.50	10.31	262
Coil Sleeve (Fits 5.00" O.D. Springs)							
CS5001	1	4.50 - 6.00	114 - 152	0.423 - 0.541	10.75 - 13.75	13.43	341
CS5001L	1	4.50 - 6.00	114 - 152	0.423 - 0.541	10.75 - 13.75	16.50	419
CS5002	1	4.50 - 6.00	114 - 152	0.551 - 0.650	14.00 - 16.50	13.43	341
CS5002L	1	4.50 - 6.00	114 - 152	0.551 - 0.650	14.00 - 16.50	16.50	419



COUPLING SPACERS Inside Diameter Coupling Spacers

- Connect Main and Tender (or Helper) Springs
- Inside Diameter Coupling Spacers for our Most Popular ERS Doublespring Applications
- Lightweight and Durable Anodized Aluminum Design
- CNC Precision Machined for Accuracy

Part Number	Quantity	Spring Diameter Range	
		inch	mm
Coupling Spacer			
SPACER136	1	1.36	35
SPACER188	1	1.88	48
SPACER225	1	2.25	57
SPACER60	1	2.36	60
SPACER250	1	2.50	64
SPACER70	1	2.75	70
SPACER300	1	3.00	76
SPACER375	1	3.75	95

SPRING PERCH ADAPTER



- Extend Your Range of Available Spring Rates
- Adapts various diameter springs
- Lightweight and Durable Anodized Aluminum Design
- CNC Precision Machined for Accuracy

Part Number	Quantity
Adapter	
ADAPTER60-250 (60mm to 2.50")	1
ADAPTER250-300 (2.50" to 3.00")	1

TORSION RELEASE BEARING - TRB Smoother Deflection



- Reduce Torsional Binding by Removing Friction During Deflection
- Smoother and More Consistent Spring Action Throughout the Entire Range of Deflection
- Allows For Easier And More Precise Ride Height Adjustment by Eliminating Spring Seat Friction

Part Number	Quantity	Spring Diameter Range	
		inch	mm
Torsion Release Bearing			
TRB188	1	1.88	48
TRB200	1	2.00	51
TRB225	1	2.25	57
TRB250	1	2.50	64
TRB300	1	3.00	76

SPRING ISOLATOR Delrin Seat Plate



- Reduce wear on spring perch
- Reduce NVH on street coilover applications

Part Number	Quantity	Spring Diameter Range	
		inch	mm
Isolator (Delrin Seat Plate)			
ISOLATOR225	1	2.25	57
ISOLATOR250	1	2.50	64
ISOLATOR300	1	3.00	76



SPRING RUBBERS | Spring Tuning

- Spring Rubbers are used to add progressive rate to your linear race spring
- Four different Spring Rubber durometers (60D - 90D) available for desired rate tuning
- Adds approximately 1.5" of stack height to your spring
- Extensive Range of Rates and Dimensions for Maximum Tuning Flexibility

Part Number	Quantity	Length	
		inch	mm
Spring Rubber			
SR.2530.0060	1	2.50	64
SR.2530.0070	1	2.50	64
SR.2530.0080	1	2.50	64
SR.2530.0090	1	2.50	64
SR.500.0060	1	5.00	127
SR.500.0070	1	5.00	127
SR.500.0080	1	5.00	127
SR.500.0090	1	5.00	127



BUMP STOPS | Secondary Spring Tuning

- Made From a Race-Proven Micro-Cellular Polyurethane Elastomer
- Tremendous Deflection Potential with Near-Zero Lateral Expansion
- Progressive Compression Characteristics
- Extensive Range of Rates and Dimensions for Maximum Tuning Flexibility

Part Number	Quantity	Length		Inside Diameter		Outside Diameter		Rate		
		inch	mm	inch	mm	inch	mm	lbs/inch	kg/mm	N/mm
Bump Stop										
EBS770015	1	1.57	40	0.71	18	2.24	57	1,887	33.76	330
EBS770034	1	1.81	46	0.79	20	2.36	60	1,514	27.03	265
EBS770014	1	2.10	54	0.71	18	2.24	57	1,185	21.20	207
EBS770040	1	2.17	55	0.75	19	2.24	57	1,229	21.99	215
EBS770006	1	2.48	63	0.71	18	1.97	50	1,083	19.34	190
EBS770021	1	2.48	63	0.81	20	2.05	52	1,172	20.97	205
EBS770052	1	2.56	65	0.71	18	1.89	48	900	16.07	158
EBS770016	1	2.68	68	0.81	20	2.05	52	990	17.71	173
EBS770020	1	2.68	68	0.79	20	2.36	60	950	16.96	166
EBS770044	1	2.72	69	0.75	19	2.36	60	965	17.26	169
EBS770051	1	2.72	69	0.91	23	2.05	52	976	17.46	171
EBS770045	1	2.76	70	0.71	18	2.36	60	910	16.28	159
EBS770047	1	2.76	70	0.71	18	2.01	51	909	16.26	159
EBS770060	1	2.76	70	0.35	9	2.01	51	1,011	18.09	177



BUMP SPRING | Spring and Cap System

- Ultra-Lightweight for Reduced Unsprung Mass
- Maximum Travel in All Rates
- Repeatable Performance-Block and Sag Resistant
- Precision Fit Cap System for 1/2 inch, 5/8 inch and 7/8 inch Shaft Sizes

Part Number	Length		Inside Diameter		Rate			Block Height		Travel		Load at Block Height		Weight	
	inch	mm	inch	mm	lbs/inch	kg/mm	N/mm	inch	mm	inch	mm	lbs	N	lbs	kg
Bump Spring															
0225.200.0050	2.25	57	1.36	35	50	0.89	9	0.51	13	1.73	44	76	339	0.01	0.03
0225.200.0075	2.25	57	1.36	35	75	1.34	13	0.57	14	1.45	37	109	483	0.07	0.03
0225.200.0100	2.25	57	1.36	35	100	1.78	18	0.61	16	1.40	36	140	622	0.09	0.04
0225.200.0150	2.25	57	1.36	35	150	2.68	26	0.71	18	1.54	39	196	870	0.02	0.05
0225.200.0250	2.25	57	1.36	35	250	4.46	44	0.79	20	1.46	37	307	1,364	0.03	0.06
0225.200.0350	2.25	57	1.36	35	350	6.25	61	0.99	25	1.26	32	442	1,966	0.05	0.10
0225.200.0450	2.25	57	1.36	35	450	8.05	79	1.06	27	1.19	30	537	2,388	0.05	0.11
0225.200.0550	2.25	57	1.36	35	550	9.84	96	1.06	27	1.19	30	654	2,909	0.02	0.01
0225.200.0650	2.25	57	1.36	35	650	11.61	114	1.10	28	1.15	29	749	3,332	0.31	0.14
0225.200.0750	2.25	57	1.36	35	750	13.39	131	1.10	28	1.15	29	861	3,828	0.02	0.01
0225.200.0850	2.25	57	1.36	35	850	15.17	149	1.22	31	1.03	26	873	3,885	0.04	0.02
0225.200.0950	2.25	57	1.36	35	950	16.96	166	1.21	31	1.04	26	987	4,392	0.04	0.02
0225.200.1050	2.25	57	1.36	35	1,050	18.75	184	1.29	33	0.96	24	1,010	4,492	0.04	0.02
0225.200.1250	2.25	57	1.36	35	1,250	22.32	219	1.34	34	0.91	23	1,137	5,057	0.04	0.02
0225.200.1400	2.25	57	1.36	35	1,400	25.00	245	1.38	35	0.87	22	1,218	5,414	0.04	0.02
0225.200.1500	2.25	57	1.36	35	1,500	26.79	263	1.42	36	0.83	21	1,242	5,525	0.04	0.02
0225.200.1600	2.25	57	1.36	35	1,600	28.57	280	1.47	37	0.78	20	1,248	5,600	0.04	0.02
0225.200.1750	2.25	57	1.36	35	1,750	31.25	306	1.47	37	0.78	20	1,360	6,050	0.53	0.24
0225.200.2000	2.25	57	1.36	35	2,000	35.71	350	1.49	38	0.76	19	1,513	6,731	0.56	0.26
0225.200.2500	2.25	57	1.36	35	2,500	44.64	438	1.57	40	0.68	17	1,692	7,525	0.63	0.29
0225.200.3000	2.25	57	1.36	35	3,000	53.55	525	1.61	41	0.64	16	1,906	8,479	0.68	0.31
0225.200.3500	2.25	57	1.36	35	3,500	62.50	613	1.61	41	0.64	16	2,232	9,928	0.71	0.32
0225.200.4000	2.25	57	1.36	35	4,000	71.40	700	1.69	43	0.63	16	2,228	9,911	0.77	0.35
0225.200.4500	2.25	57	1.36	35	4,500	80.36	788	1.73	44	0.51	13	2,330	10,362	0.82	0.37
0225.200.5000	2.25	57	1.36	35	5,000	88.52	876	1.77	45	0.47	12	2,391	10,637	0.86	0.39
0225.200.6000	2.25	57	1.36	35	6,000	107.33	1,051	0.79	20	1.46	37	2,440	10,854	0.13	0.06
0225.200.7000	2.25	57	1.36	35	7,000	124.94	1,226	1.83	47	0.42	11	2,926	13,013	0.88	0.40

Part Number	Rod Size			Stack Height		Cap O.D.	
	inch	mm	fraction	inch	mm	inch	mm
Bump Spring Cap							
BSC.500	0.50	13	1/2	.24	6	1.36	6
BSC.625	0.63	16	5/8	.24	6	1.36	6
BSC.875	0.88	22	7/8	.24	6	1.36	6
BSC163.500	1.63	41	1/2	.24	6	1.63	6
BSC163.625	1.63	41	5/8	.24	6	1.63	6

Part Number

Bump Spring Case

BSC.500



Spring, Caps and Box sold separately.



EIBACH RACE SPRINGS

In the early 80s, Wilfried Eibach laid the foundation for what is now our Eibach Racing Spring line. The ERS line has evolved over the years to be one of the industry's most prominent, comprehensive and superior Race Spring Systems. Eibach Race Springs are all manufactured in series production, often repeated, with a strong manufacturing experience. Thus, Eibach constantly achieves the most linear spring characteristic (rate) while maintaining the tightest tolerances and the highest quality in the industry.

COILOVER (STANDARD) 1.63" (Quarter Midget)

- Designed exclusively for .25 midget requirements
- Available in 3.5" and 5" lengths for optimum tuning options
- Each spring individually tested and rated




Part Number	Length		Inside Diameter		Rate			Block Height		Travel		Load at Block Height		Weight	
	inch	mm	inch	mm	lbs/inch	kg/mm	N/mm	inch	mm	inch	mm	lbs	N	lbs	kg
5.00 (length in inches)															
0500.163.0070	5.00	127	1.63	41	70	1.25	12	1.30	33	3.70	94	259	1,152	0.31	0.14
0500.163.0075	5.00	127	1.63	41	75	1.34	13	1.42	36	3.58	91	268	1,190	0.36	0.16
0500.163.0080	5.00	127	1.63	41	80	1.43	14	1.46	37	3.54	90	283	1,259	0.36	0.16
0500.163.0085	5.00	127	1.63	41	85	1.52	15	1.40	36	3.60	91	306	1,361	0.35	0.16
0500.163.0090	5.00	127	1.63	41	90	1.61	16	1.45	37	3.55	90	320	1,423	0.37	0.17
0500.163.0095	5.00	127	1.63	41	95	1.70	17	1.47	37	3.53	90	335	1,490	0.38	0.17
0500.163.0100	5.00	127	1.63	41	100	1.78	18	1.52	39	3.48	88	348	1,548	0.40	0.18
0500.163.0105	5.00	127	1.63	41	105	1.88	18	1.57	40	3.43	87	360	1,601	0.43	0.20
0500.163.0110	5.00	127	1.63	41	110	1.96	19	1.53	39	3.47	88	382	1,699	0.41	0.19
0500.163.0115	5.00	127	1.63	41	115	2.05	20	1.55	39	3.45	88	396	1,761	0.43	0.20
0500.163.0120	5.00	127	1.63	41	120	2.14	21	1.63	41	3.37	86	405	1,802	0.46	0.21
0500.163.0125	5.00	127	1.63	41	125	2.23	22	1.68	43	3.32	84	415	1,846	0.48	0.22
0500.163.0130	5.00	127	1.63	41	130	2.32	23	1.73	44	3.27	83	425	1,890	0.50	0.23
0500.163.0135	5.00	127	1.63	41	135	2.41	24	1.78	45	3.22	82	434	1,931	0.53	0.24
0500.163.0140	5.00	127	1.63	41	140	2.50	25	1.73	44	3.27	83	457	2,033	0.52	0.24
0500.163.0145	5.00	127	1.63	41	145	2.59	25	1.68	43	3.32	84	481	2,140	0.50	0.23
0500.163.0150	5.00	127	1.63	41	150	2.68	26	1.74	44	3.26	83	490	2,180	0.53	0.24

COILOVER (STANDARD)

1.88" Coilover Springs

- Engineered to work with Dwarf, Legend and Midget race cars
- Optimum travel and linearity
- Available in 8" and 10" lengths

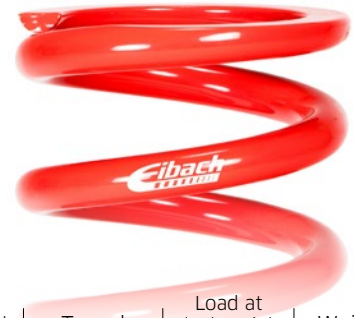

Part Number	Length		Inside Diameter		Rate			Block Height		Travel		Load at Block Height		Weight	
	inch	mm	inch	mm	lbs/inch	kg/mm	N/mm	inch	mm	inch	mm	lbs	N	lbs	kg
8.00 (length in inches)															
0800.188.0095	8.00	203	1.88	48	95	1.70	17	2.32	59	5.67	144	539	2,399	0.88	0.40
0800.188.0100	8.00	203	1.88	48	100	1.78	18	2.60	66	5.40	137	539	2,398	1.06	0.48
0800.188.0105	8.00	203	1.88	48	105	1.88	18	2.62	67	5.38	137	565	2,514	1.10	0.50
0800.188.0115	8.00	203	1.88	48	115	2.05	20	2.83	72	5.17	131	595	2,647	1.19	0.54
0800.188.0125	8.00	203	1.88	48	125	2.23	22	2.68	68	5.32	135	664	2,955	1.17	0.53
0800.188.0137	8.00	203	1.88	48	137	2.45	24	2.94	75	5.04	128	693	3,083	1.32	0.60
0800.188.0150	8.00	203	1.88	48	150	2.68	26	2.83	72	5.17	131	774	3,441	1.30	0.59
0800.188.0163	8.00	203	1.88	48	163	2.92	29	3.03	77	4.96	126	809	3,596	1.40	0.64
0800.188.0175	8.00	203	1.88	48	175	3.13	31	3.03	77	4.97	126	868	3,862	1.50	0.68
0800.188.0180	8.00	203	1.88	48	180	3.21	32	3.15	80	4.85	123	873	3,883	1.51	0.68
0800.188.0185	8.00	203	1.88	48	185	3.30	32	3.31	84	4.69	119	868	3,861	1.61	0.73
0800.188.0200	8.00	203	1.88	48	200	3.57	35	3.16	80	4.84	123	967	4,301	1.61	0.73
0800.188.0225	8.00	203	1.88	48	225	4.02	39	3.27	83	4.73	120	1,063	4,728	1.73	0.78
0800.188.0250	8.00	203	1.88	48	250	4.46	44	3.28	83	4.72	120	1,181	5,253	1.78	0.81
0800.188.0280	8.00	203	1.88	48	280	5.00	49	3.42	87	4.58	116	1,281	5,698	1.86	0.84
0800.188.0300	8.00	203	1.88	48	300	5.36	53	3.50	89	4.50	114	1,346	5,989	2.03	0.92
0800.188.0325	8.00	203	1.88	48	325	5.80	57	3.63	92	4.37	111	1,421	6,321	2.16	0.98
0800.188.0350	8.00	203	1.88	48	350	6.25	61	3.76	96	4.24	108	1,484	6,601	2.31	1.05
10.00 (length in inches)															
1000.188.0050	10.00	254	1.88	48	50	0.89	9	2.49	63	7.51	191	376	1,673	0.86	0.39
1000.188.0060	10.00	254	1.88	48	60	1.07	11	2.60	66	7.40	188	444	1,975	0.95	0.43
1000.188.0070	10.00	254	1.88	48	70	1.25	12	2.76	70	7.24	184	506	2,252	1.06	0.48
1000.188.0080	10.00	254	1.88	48	80	1.43	14	2.95	75	7.05	179	564	2,509	1.19	0.54
1000.188.0090	10.00	254	1.88	48	90	1.61	16	2.99	76	7.01	178	631	2,807	1.26	0.57
1000.188.0100	10.00	254	1.88	48	100	1.78	18	3.27	83	6.73	171	673	2,994	1.41	0.64
1000.188.0110	10.00	254	1.88	48	110	1.96	19	3.27	83	6.73	171	740	3,292	1.41	0.64
1000.188.0120	10.00	254	1.88	48	120	2.14	21	3.46	88	6.54	166	784	3,487	1.54	0.70
1000.188.0130	10.00	254	1.88	48	130	2.32	23	3.57	91	6.43	163	835	3,714	1.71	0.78
1000.188.0145	10.00	254	1.88	48	145	2.59	25	4.25	108	5.75	146	834	3,710	2.14	0.97
1000.188.0160	10.00	254	1.88	48	160	2.86	28	3.83	97	6.17	157	987	4,390	1.96	0.89
1000.188.0175	10.00	254	1.88	48	175	3.13	31	3.98	101	6.02	153	1,053	4,684	2.10	0.95
1000.188.0185	10.00	254	1.88	48	185	3.30	32	4.36	111	5.64	143	1,043	4,641	2.20	1.00
1000.188.0200	10.00	254	1.88	48	200	3.57	35	3.99	101	6.01	153	1,203	5,351	2.18	0.99
1000.188.0225	10.00	254	1.88	48	225	4.02	39	4.56	116	5.44	138	1,223	5,440	2.60	1.18
1000.188.0250	10.00	254	1.88	48	250	4.46	44	4.55	116	5.45	138	1,363	6,063	2.73	1.24
1000.188.0275	10.00	254	1.88	48	275	4.91	48	4.63	118	5.37	136	1,478	6,574	2.86	1.30
1000.188.0300	10.00	254	1.88	48	300	5.36	53	4.39	112	5.61	142	1,683	7,486	2.65	1.20
1000.188.0325	10.00	254	1.88	48	325	5.80	57	4.50	114	5.50	140	1,787	7,949	2.79	1.27
1000.188.0350	10.00	254	1.88	48	350	6.25	61	4.67	119	5.33	135	1,865	8,296	2.98	1.35
1000.188.0400	10.00	254	1.88	48	400	7.14	70	4.57	116	5.43	138	2,171	9,657	2.99	1.36
1000.188.0450	10.00	254	1.88	48	450	8.05	79	4.94	125	5.06	129	2,277	10,129	3.42	1.55
Helper (prevents main spring from becoming loose at full droop)															
HELPER188	2.98	76	1.90	48	12	0.22	2	0.72	18	2.26	57	29	130	0.35	0.14
Tender/Linear															
0300.188.0033	3.00	76	1.88	48	33	0.59	6	0.75	19	2.24	57	99	441	0.44	0.20
0300.188.0055	3.00	76	1.88	48	55	0.98	10	1.26	32	1.73	44	164	730	0.77	0.35
Spacer (ID locating main to helper/tender coupling spacer)															
SPACER188	1.88	48													
Torsion Release Bearing															
TRB188	1.88	48													

COILOVER (STANDARD)

2.00" Coilover Springs




Part Number	Length		Inside Diameter		Rate			Block Height		Travel		Load at Block Height		Weight	
	inch	mm	inch	mm	lbs/inch	kg/mm	N/mm	inch	mm	inch	mm	lbs	N	lbs	kg
4.00 (length in inches)															
0400.200.0350	4.00	102	2.00	51	350	6.25	61	1.61	41	2.39	61	837	3,723	0.81	0.37
0400.200.0500	4.00	102	2.00	51	500	8.94	88	1.97	50	2.03	52	1,017	4,522	1.08	0.49
0400.200.0550	4.00	102	2.00	51	550	9.84	96	1.73	44	2.28	58	1,248	5,551	0.99	0.45
0400.200.0600	4.00	102	2.00	51	600	10.71	105	1.91	48	2.09	53	1,255	5,584	1.07	0.49
0400.200.0650	4.00	102	2.00	51	650	11.61	114	2.05	52	1.97	50	1,282	5,703	1.28	0.58
0400.200.0700	4.00	102	2.00	51	700	12.50	123	1.97	50	2.05	52	1,436	6,388	1.21	0.55
0400.200.0750	4.00	102	2.00	51	750	13.39	131	2.01	51	2.01	51	1,501	6,677	1.30	0.59
0400.200.0800	4.00	102	2.00	51	800	14.28	140	2.01	51	1.97	50	1,586	7,055	1.23	0.56
0400.200.0850	4.00	102	2.00	51	850	15.17	149	1.93	49	2.09	53	1,774	7,890	1.19	0.54
0400.200.0900	4.00	102	2.00	51	900	16.07	158	2.01	51	2.01	51	1,807	8,039	1.28	0.58
0400.200.0950	4.00	102	2.00	51	950	16.96	166	2.13	54	1.89	48	1,790	7,961	1.37	0.62
0400.200.1000	4.00	102	2.00	51	1,000	17.85	175	2.05	52	1.97	50	1,969	8,757	1.30	0.59
0400.200.1050	4.00	102	2.00	51	1,050	18.75	184	2.13	54	1.89	48	1,984	8,827	1.41	0.64
0400.200.1100	4.00	102	2.00	51	1,100	19.64	193	2.05	52	1.97	50	2,165	9,632	1.37	0.62
0400.200.1150	4.00	102	2.00	51	1,150	20.53	201	2.17	55	1.81	46	2,104	9,359	1.48	0.67
0400.200.1200	4.00	102	2.00	51	1,200	21.42	210	2.10	53	1.90	48	2,275	10,121	1.43	0.65
0400.200.1250	4.00	102	2.00	51	1,250	22.32	219	2.17	55	1.81	46	2,283	10,155	1.50	0.68
0400.200.1300	4.00	102	2.00	51	1,300	23.22	228	2.15	55	1.85	47	2,405	10,696	1.50	0.68
0400.200.1400	4.00	102	2.00	51	1,400	25.00	245	2.20	56	1.81	46	2,524	11,227	1.57	0.71
0400.200.1500	4.00	102	2.00	51	1,500	26.79	263	2.22	56	1.78	45	2,670	11,874	1.62	0.74
0400.200.1600	4.00	102	2.00	51	1,600	28.57	280	2.27	58	1.73	44	2,774	12,338	1.70	0.77
0400.200.1700	4.00	102	2.00	51	1,700	30.34	298	2.36	60	1.65	42	2,784	12,384	1.83	0.83
0400.200.1800	4.00	102	2.00	51	1,800	32.14	315	2.24	57	1.73	44	3,125	13,901	1.74	0.79
0400.200.1900	4.00	102	2.00	51	1,900	33.91	333	2.32	59	1.65	42	3,165	14,079	1.83	0.83
0400.200.2100	4.00	102	2.00	51	2,100	37.48	368	2.36	60	1.65	42	3,473	15,447	1.90	0.86
0400.200.2200	4.00	102	2.00	51	2,200	39.28	385	2.40	61	1.61	41	3,521	15,662	1.96	0.89
0400.200.2400	4.00	102	2.00	51	2,400	42.86	420	2.40	61	1.57	40	3,797	16,890	2.38	1.08
0400.200.2600	4.00	102	2.00	51	2,600	46.41	455	2.44	62	1.57	40	4,067	18,091	2.43	1.10
0400.200.2800	4.00	102	2.00	51	2,800	49.98	490	2.60	66	1.42	36	3,974	17,677	2.31	1.05
0400.200.3000	4.00	102	2.00	51	3,000	53.55	525	2.52	64	1.50	38	4,511	20,066	2.20	1.00
0400.200.3500	4.00	102	2.00	51	3,500	62.50	613	2.68	68	1.34	34	4,699	20,902	2.54	1.15
5.00 (length in inches)															
0500.200.0400	5.00	127	2.00	51	400	7.14	70	2.28	58	2.72	69	1,082	4,813	1.28	0.58
0500.200.0450	5.00	127	2.00	51	450	8.05	79	2.24	57	2.76	70	1,240	5,517	1.32	0.60
0500.200.0500	5.00	127	2.00	51	500	8.94	88	2.24	57	2.76	70	1,378	6,130	1.39	0.63
0500.200.0550	5.00	127	2.00	51	550	9.84	96	2.32	59	2.68	68	1,473	6,550	1.46	0.66
0500.200.0600	5.00	127	2.00	51	600	10.71	105	2.36	60	2.64	67	1,583	7,040	1.54	0.70

COILOVER (STANDARD) | 2.00" Continued

Part Number	Length		Inside Diameter		Rate			Block Height		Travel		Load at Block Height		Weight	
	inch	mm	inch	mm	lbs/inch	kg/mm	N/mm	inch	mm	inch	mm	lbs	N	lbs	kg
5.00 (length in inches)															
0500.200.0650	5.00	127	2.00	51	650	11.61	114	2.32	59	2.68	68	1,740	7,741	1.46	0.66
0500.200.0700	5.00	127	2.00	51	700	12.50	123	2.36	60	2.64	67	1,836	8,167	1.52	0.69
0500.200.0750	5.00	127	2.00	51	750	13.39	131	2.44	62	2.56	65	1,909	8,492	1.61	0.73
0500.200.0800	5.00	127	2.00	51	800	14.28	140	2.56	65	2.44	62	1,956	8,701	1.72	0.78
0500.200.0850	5.00	127	2.00	51	850	15.17	149	2.45	62	2.55	65	2,170	9,652	1.65	0.75
0500.200.0900	5.00	127	2.00	51	900	16.07	158	2.52	64	2.48	63	2,228	9,909	1.75	0.79
0500.200.0950	5.00	127	2.00	51	950	16.96	166	2.64	67	2.36	60	2,255	10,031	1.87	0.85
0500.200.1000	5.00	127	2.00	51	1,000	17.85	175	2.56	65	2.44	62	2,464	10,960	1.81	0.82
0500.200.1050	5.00	127	2.00	51	1,050	18.75	184	2.64	67	2.36	60	2,481	11,036	1.92	0.87
0500.200.1100	5.00	127	2.00	51	1,100	19.64	193	2.76	70	2.24	57	2,485	11,054	2.05	0.93
0500.200.1150	5.00	127	2.00	51	1,150	20.53	201	2.67	68	2.33	59	2,680	11,921	2.00	0.91
0500.200.1200	5.00	127	2.00	51	1,200	21.42	210	2.76	70	2.24	57	2,672	11,886	2.14	0.97
0500.200.1250	5.00	127	2.00	51	1,250	22.32	219	2.74	70	2.30	58	2,874	12,783	2.07	0.94
0500.200.1300	5.00	127	2.00	51	1,300	23.22	228	2.80	71	2.20	56	2,853	12,691	2.20	1.00
0500.200.1350	5.00	127	2.00	51	1,350	24.10	236	2.72	69	2.28	58	3,063	13,625	2.14	0.97
0500.200.1400	5.00	127	2.00	51	1,400	25.00	245	2.87	73	2.13	54	2,994	13,318	2.29	1.04
0500.200.1500	5.00	127	2.00	51	1,500	26.79	263	2.91	74	2.09	53	3,122	13,887	2.40	1.09
0500.200.1600	5.00	127	2.00	51	1,600	28.57	280	2.80	71	2.20	56	3,536	15,729	2.27	1.03
0500.200.1700	5.00	127	2.00	51	1,700	30.34	298	2.83	72	2.17	55	3,667	16,312	2.38	1.08
0500.200.1800	5.00	127	2.00	51	1,800	32.14	315	2.90	74	2.10	53	3,786	16,840	2.48	1.13
0500.200.1900	5.00	127	2.00	51	1,900	33.91	333	2.99	76	2.01	51	3,843	17,094	2.60	1.18
0500.200.2000	5.00	127	2.00	51	2,000	35.71	350	3.06	78	1.94	49	3,881	17,265	2.75	1.25
0500.200.2100	5.00	127	2.00	51	2,100	37.48	368	3.14	80	1.86	47	3,902	17,356	2.87	1.30
0500.200.2200	5.00	127	2.00	51	2,200	39.28	385	3.03	77	1.97	50	4,335	19,280	2.87	1.30
0500.200.2300	5.00	127	2.00	51	2,300	41.05	403	3.15	80	3.07	78	4,283	19,049	2.87	1.30
0500.200.2400	5.00	127	2.00	51	2,400	42.86	420	3.19	81	1.81	46	4,334	19,278	3.04	1.38
0500.200.2600	5.00	127	2.00	51	2,600	46.41	455	3.19	81	1.81	46	4,708	20,942	3.10	1.41
0500.200.2800	5.00	127	2.00	51	2,800	49.98	490	3.21	82	1.79	45	5,005	22,264	3.19	1.45
0500.200.3000	5.00	127	2.00	51	3,000	53.55	525	3.26	83	1.74	44	5,233	23,276	3.53	1.60
6.00 (length in inches)															
0600.200.0350	6.00	152	2.00	51	350	6.25	61	2.32	59	3.66	93	1,285	5,717	1.37	0.62
0600.200.0400	6.00	152	2.00	51	400	7.14	70	2.28	58	3.70	94	1,472	6,550	1.41	0.64
0600.200.0450	6.00	152	2.00	51	450	8.01	79	2.56	65	3.46	88	1,550	6,895	1.65	0.75
0600.200.0500	6.00	152	2.00	51	500	8.92	88	2.56	65	3.43	87	1,712	7,614	1.72	0.78
0600.200.0550	6.00	152	2.00	51	550	9.82	96	2.60	66	3.39	86	1,858	8,267	1.79	0.81
0600.200.0600	6.00	152	2.00	51	600	10.71	105	2.64	67	3.35	85	2,006	8,922	1.87	0.85
0600.200.0650	6.00	152	2.00	51	650	11.60	114	2.72	69	3.27	83	2,130	9,474	1.96	0.89
0600.200.0700	6.00	152	2.00	51	700	12.49	123	2.80	71	3.19	81	2,238	9,954	2.07	0.94
0600.200.0750	6.00	152	2.00	51	750	13.39	131	2.87	73	3.11	79	2,333	10,377	2.21	1.00
0600.200.0800	6.00	152	2.00	51	800	14.28	140	2.95	75	3.03	77	2,421	10,767	2.32	1.05
0600.200.0850	6.00	152	2.00	51	850	15.17	149	2.80	71	3.19	81	2,708	12,048	2.18	0.99
0600.200.0900	6.00	152	2.00	51	900	16.06	158	2.91	74	3.07	78	2,772	12,332	2.34	1.06
0600.200.0950	6.00	152	2.00	51	950	16.96	166	3.03	77	2.95	75	2,822	12,553	2.49	1.13
0600.200.1000	6.00	152	2.00	51	1,000	17.85	175	3.11	79	2.87	73	2,885	12,833	2.62	1.19
0600.200.1100	6.00	152	2.00	51	1,100	19.63	193	3.11	79	2.87	73	3,160	14,057	2.69	1.22
0600.200.1200	6.00	152	2.00	51	1,200	21.42	210	3.11	79	2.87	73	3,466	15,418	2.73	1.24
0600.200.1300	6.00	152	2.00	51	1,300	23.20	228	3.15	80	2.87	73	3,713	16,516	2.82	1.28
0600.200.1400	6.00	152	2.00	51	1,400	24.99	245	3.15	80	2.83	72	3,953	17,582	2.91	1.32
0600.200.1500	6.00	152	2.00	51	1,500	26.77	263	3.19	81	2.80	71	4,187	18,626	3.02	1.37
0600.200.1600	6.00	152	2.00	51	1,600	28.56	280	3.27	83	2.72	69	4,373	19,453	3.13	1.42
0600.200.1700	6.00	152	2.00	51	1,700	30.34	298	3.31	84	2.68	68	4,547	20,228	3.26	1.48
0600.200.1800	6.00	152	2.00	51	1,800	32.13	315	3.39	86	2.60	66	4,710	20,952	3.40	1.54
Helper															
HELPER200	2.83	72	2.00	51	11.00	0.20	2	0.43	11	2.40	61	27	121	0.33	0.15
Torsion Release Bearing															
TRB200			2.00	51											

COILOVER (STANDARD)

2.25" Coilover Springs

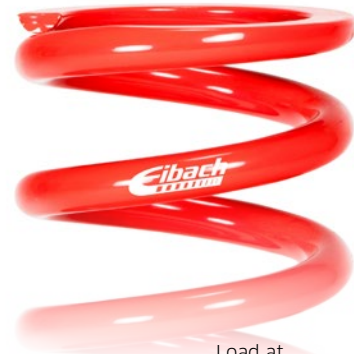

Part Number	Length		Inside Diameter		Rate			Block Height		Travel		Load at Block Height		Weight	
	inch	mm	inch	mm	lbs/inch	kg/mm	N/mm	inch	mm	inch	mm	lbs	N	lbs	kg
5.00 (length in inches)															
0500.225.0400	5.00	127	2.25	57	400	7.14	70	1.97	50	3.03	77	1,213	5,394	1.28	0.58
0500.225.0450	5.00	127	2.25	57	450	8.05	79	2.17	55	2.83	72	1,284	5,711	1.50	0.68
0500.225.0500	5.00	127	2.25	57	500	8.94	88	2.09	53	2.91	74	1,456	6,477	1.39	0.63
0500.225.0550	5.00	127	2.25	57	550	9.84	96	2.13	54	2.87	73	1,585	7,050	1.43	0.65
0500.225.0600	5.00	127	2.25	57	600	10.71	105	2.17	55	2.83	72	1,699	7,557	1.52	0.69
0500.225.0650	5.00	127	2.25	57	650	11.61	114	2.20	56	2.80	71	1,806	8,033	1.59	0.72
0500.225.0700	5.00	127	2.25	57	700	12.50	123	2.28	58	2.72	69	1,894	8,425	1.70	0.77
0500.225.0750	5.00	127	2.25	57	750	13.39	131	2.36	60	2.64	67	1,989	8,847	1.79	0.81
0500.225.0800	5.00	127	2.25	57	800	14.28	140	2.44	62	2.56	65	2,044	9,092	1.90	0.86
0500.225.0850	5.00	127	2.25	57	850	15.17	149	2.32	59	2.68	68	2,269	10,093	1.81	0.82
0500.225.0900	5.00	127	2.25	57	900	16.07	158	2.44	62	2.56	65	2,316	10,302	1.94	0.88
0500.225.0950	5.00	127	2.25	57	950	16.96	166	2.52	64	2.52	64	2,371	10,547	2.05	0.93
0500.225.1000	5.00	127	2.25	57	1,000	17.85	175	2.44	62	2.56	65	2,567	11,419	1.98	0.90
0500.225.1050	5.00	127	2.25	57	1,050	18.75	184	2.52	64	2.48	63	2,616	11,636	2.09	0.95
0500.225.1100	5.00	127	2.25	57	1,100	19.64	193	2.60	66	2.40	61	2,631	11,703	2.23	1.01
0500.225.1150	5.00	127	2.25	57	1,150	20.53	201	2.52	64	2.48	63	2,835	12,611	2.16	0.98
0500.225.1200	5.00	127	2.25	57	1,200	21.42	210	2.64	67	2.36	60	2,837	12,620	2.31	1.05
0500.225.1250	5.00	127	2.25	57	1,250	22.32	219	2.56	65	2.44	62	3,050	13,567	2.23	1.01
0500.225.1300	5.00	127	2.25	57	1,300	23.22	228	2.64	67	2.36	60	3,073	13,669	2.36	1.07
0500.225.1350	5.00	127	2.25	57	1,350	24.10	236	2.76	70	2.24	57	3,052	13,576	2.51	1.14
0500.225.1400	5.00	127	2.25	57	1,400	25.00	245	2.68	68	2.32	59	3,238	14,403	2.45	1.11
0500.225.1450	5.00	127	2.25	57	1,450	25.89	254	2.80	71	2.20	56	3,204	14,252	2.60	1.18
0500.225.1500	5.00	127	2.25	57	1,500	26.79	263	2.76	70	2.24	57	3,394	15,097	2.56	1.16
0500.225.1550	5.00	127	2.25	57	1,550	27.67	271	2.83	72	2.17	55	3,344	14,875	2.71	1.23
0500.225.1600	5.00	127	2.25	57	1,600	28.57	280	2.80	71	2.20	56	3,539	15,742	2.67	1.21
0500.225.1700	5.00	127	2.25	57	1,700	30.34	298	2.83	72	2.17	55	3,674	16,343	2.78	1.26
0500.225.1800	5.00	127	2.25	57	1,800	32.14	315	2.87	73	2.13	54	3,799	16,899	2.89	1.31
0500.225.1900	5.00	127	2.25	57	1,900	33.91	333	2.94	75	2.06	52	3,914	17,410	3.00	1.36
0500.225.2000	5.00	127	2.25	57	2,000	35.71	350	2.85	73	2.15	55	4,291	19,086	2.89	1.31
0500.225.2100	5.00	127	2.25	57	2,100	37.48	368	2.91	74	2.09	53	4,361	19,399	3.26	1.48
0500.225.2200	5.00	127	2.25	57	2,200	39.28	385	2.98	76	2.02	51	4,438	19,743	3.15	1.43
0500.225.2300	5.00	127	2.25	57	2,300	41.05	403	3.06	78	1.94	49	4,457	19,826	3.31	1.50
0500.225.2400	5.00	127	2.25	57	2,400	42.86	420	2.99	76	2.01	51	4,797	21,338	3.24	1.47
0500.225.2700	5.00	127	2.25	57	2,700	48.19	473	3.04	77	1.96	50	5,296	23,558	3.39	1.54
0500.225.2900	5.00	127	2.25	57	2,900	51.76	508	3.20	81	1.80	46	5,223	23,231	3.72	1.69
0500.225.3000	5.00	127	2.25	57	3,000	53.55	525	3.13	80	1.87	47	5,595	24,889	3.64	1.65
0500.225.3100	5.00	127	2.25	57	3,100	55.33	543	3.27	83	1.73	44	5,430	24,154	3.86	1.75
0500.225.3200	5.00	127	2.25	57	3,200	57.12	560	3.18	81	1.82	46	5,813	25,859	3.76	1.71
0500.225.3300	5.00	127	2.25	57	3,300	58.90	578	3.26	83	1.74	44	5,727	25,477	3.94	1.79
0500.225.3400	5.00	127	2.25	57	3,400	60.69	595	3.19	81	1.81	46	6,124	27,241	3.86	1.75
0500.225.3500	5.00	127	2.25	57	3,500	62.50	613	3.27	83	1.73	44	6,021	26,783	4.01	1.82
0500.225.3600	5.00	127	2.25	57	3,600	64.26	630	3.23	82	1.77	45	6,434	28,620	3.92	1.78
0500.225.3800	5.00	127	2.25	57	3,800	67.83	665	3.26	83	1.74	44	6,612	29,410	4.06	1.84
0500.225.4000	5.00	127	2.25	57	4,000	71.40	700	3.31	84	1.69	43	6,771	30,117	4.19	1.90

COILOVER (STANDARD) | 2.25" Continued

Part Number	Length		Inside Diameter		Rate			Block Height		Travel		Load at Block Height		Weight	
	inch	mm	inch	mm	lbs/inch	kg/mm	N/mm	inch	mm	inch	mm	lbs	N	lbs	kg
9.00 (length in inches)															
0700.225.0850	7.00	178	2.25	57	850	15.17	149	3.56	90	3.44	87	2,926	13,015	3.28	1.49
0700.225.0900	7.00	178	2.25	57	900	16.07	158	3.43	87	3.57	91	3,213	14,292	3.15	1.43
0700.225.1000	7.00	178	2.25	57	1,000	17.85	175	3.64	92	3.36	85	3,359	14,942	3.50	1.59
0700.225.1100	7.00	178	2.25	57	1,100	19.64	193	3.63	92	3.37	86	3,710	16,503	3.57	1.62
8.00 (length in inches)															
0800.225.0150	8.00	203	2.25	57	150	2.68	26	2.72	69	2.72	134	791	3,520	1.61	0.73
0800.225.0200	8.00	203	2.25	57	200	3.57	35	2.95	75	5.05	128	1,010	4,493	1.95	0.88
0800.225.0225	8.00	203	2.25	57	225	4.02	39	3.10	79	4.90	124	1,102	4,902	2.02	0.92
0800.225.0250	8.00	203	2.25	57	250	4.46	44	3.09	78	4.91	125	1,227	5,458	2.13	0.97
0800.225.0275	8.00	203	2.25	57	275	4.91	48	3.25	83	4.75	121	1,307	5,814	2.24	1.02
0800.225.0300	8.00	203	2.25	57	300	5.36	53	3.03	77	4.97	126	1,490	6,628	2.07	0.94
0800.225.0325	8.00	203	2.25	57	325	5.80	57	3.13	80	4.87	124	1,584	7,046	2.20	1.00
0800.225.0350	8.00	203	2.25	57	350	6.25	61	3.22	82	4.78	121	1,671	7,433	2.34	1.06
0800.225.0375	8.00	203	2.25	57	375	6.70	66	3.30	84	4.70	119	1,762	7,838	2.47	1.12
0800.225.0400	8.00	203	2.25	57	400	7.14	70	3.46	88	4.54	115	1,814	8,069	2.66	1.21
0800.225.0425	8.00	203	2.25	57	425	7.59	74	3.59	91	4.41	112	1,875	8,340	2.82	1.28
0800.225.0450	8.00	203	2.25	57	450	8.05	79	3.43	87	4.57	116	2,055	9,141	2.69	1.22
0800.225.0475	8.00	203	2.25	57	475	8.50	83	3.58	91	4.42	112	2,101	9,346	2.89	1.31
0800.225.0500	8.00	203	2.25	57	500	8.94	88	3.44	87	4.56	116	2,279	10,137	2.78	1.26
0800.225.0550	8.00	203	2.25	57	550	9.84	96	3.73	95	4.27	108	2,347	10,440	3.16	1.43
0800.225.0600	8.00	203	2.25	57	600	10.71	105	3.76	96	4.24	108	2,543	11,312	3.26	1.48
0800.225.0650	8.00	203	2.25	57	650	11.61	114	3.81	97	4.19	106	2,721	12,104	3.39	1.54
0800.225.0700	8.00	203	2.25	57	700	12.50	123	3.92	100	4.08	104	2,859	12,717	3.57	1.62
0800.225.0750	8.00	203	2.25	57	750	13.39	131	3.94	100	4.06	103	3,044	13,540	3.66	1.66
0800.225.0800	8.00	203	2.25	57	800	14.28	140	4.04	103	3.96	101	3,165	14,079	3.86	1.75
0800.225.0850	8.00	203	2.25	57	850	15.17	149	4.12	105	3.88	99	3,299	14,675	4.01	1.82
0800.225.0900	8.00	203	2.25	57	900	16.07	158	4.20	107	3.80	97	3,424	15,231	4.17	1.89
0800.225.1000	8.00	203	2.25	57	1,000	17.85	175	4.13	105	3.87	98	3,866	17,197	4.19	1.90
9.00 (length in inches)															
0900.225.0250	9.00	229	2.25	57	250	4.46	44	3.50	89	5.50	140	1,375	6,116	2.43	1.10
0900.225.0300	9.00	229	2.25	57	300	5.36	53	3.64	92	5.36	136	1,608	7,153	2.66	1.21
0900.225.0350	9.00	229	2.25	57	350	6.25	61	3.85	98	5.15	131	1,801	8,011	2.98	1.35
0900.225.0400	9.00	229	2.25	57	400	7.14	70	3.76	96	5.24	133	2,094	9,315	2.98	1.35
0900.225.0450	9.00	229	2.25	57	450	8.05	79	4.02	102	4.98	126	2,239	9,960	3.35	1.52
0900.225.0500	9.00	229	2.25	57	500	8.94	88	4.02	102	4.98	126	2,492	11,085	3.42	1.55
0900.225.0550	9.00	229	2.25	57	550	9.84	96	4.05	103	4.95	126	2,721	12,104	3.53	1.60
0900.225.0600	9.00	229	2.25	57	600	10.71	105	4.39	112	4.61	117	2,764	12,295	4.03	1.83
0900.225.0700	9.00	229	2.25	57	700	12.50	123	4.49	114	4.51	115	3,159	14,052	4.30	1.95
0900.225.0800	9.00	229	2.25	57	800	14.28	140	4.60	117	4.40	112	3,519	15,653	4.61	2.09
0900.225.0900	9.00	229	2.25	57	900	16.07	158	4.80	122	4.20	107	3,782	16,823	5.00	2.27
Tender/Linear															
0175.225.0150	2.72	69	2.25	57	150	2.68	26	0.97	25	1.75	44	263	1,170	0.88	0.40
0175.225.0250	3.35	85	2.25	57	250	4.46	44	1.60	41	1.75	44	438	1,948	1.59	0.72
0175.225.0300	3.00	76	2.25	57	303	5.40	53	1.34	34	1.75	44	525	2,336	0.97	0.44
0225.225.0150	3.39	86	2.25	57	150	2.68	26	1.07	27	2.31	59	344	1,528	1.04	0.47
0225.225.0200	3.22	82	2.25	57	200	3.57	35	0.95	24	2.20	56	460	2,050	0.82	0.37
0225.225.0250	3.78	96	2.25	57	250	4.46	44	1.50	38	2.28	58	565	2,512	2.29	1.04
Helper															
HELPER225	3.00	76	2.25	57	12	0.21	2	0.61	15	2.45	62	31	138	0.30	0.14
HELPER225T	5.91	150	2.25	57	9	0.15	2	0.56	14	5.35	136	46	204	0.33	0.15
Spacer (ID locating main to helper/tender coupling spacer)															
SPACER225			2.25	57											
Isolator (Delrin Seat Plate)															
ISOLATOR225			2.25	57											
Torsion Release Bearing															
TRB225			2.25	57											

XT BARREL

2.50" I.D. Extreme Travel

The XT Barrel spring works seamlessly with standard 2.5-inch spring perches, allowing easy access to the lower ball joint while retaining the benefits of a larger diameter spring-with more travel and more shock body clearance. The continuous taper of Eibach's XT Barrel springs to a maximum 3.0" ID allows our engineers to increase the spring-coil pitch yielding a light weight spring, and increased usable travel.



Part Number	Length		Inside Diameter		Rate			Block Height		Travel		Load at Block Height		Weight	
	inch	mm	inch	mm	lbs/inch	kg/mm	N/mm	inch	mm	inch	mm	lbs	N	lbs	kg
8.00 (length in inches)															
0600.2530.0100	6.00	152	2.50	64	100	1.78	18	1.39	35	4.61	117	461	2,051	0.84	0.38
0600.2530.0150	6.00	152	2.50	64	150	2.68	26	1.62	41	4.38	111	657	2,922	1.10	0.50
0600.2530.0200	6.00	152	2.50	64	200	3.57	35	1.97	50	4.02	102	807	3,588	1.28	0.58
0600.2530.0250	6.00	152	2.50	64	250	4.46	44	2.00	51	4.00	102	1,001	4,452	1.58	0.72
0600.2530.0300	6.00	152	2.50	64	300	5.36	53	1.93	49	4.06	103	1,221	5,433	1.52	0.71
0600.2530.0350	6.00	152	2.50	64	350	6.25	61	1.90	48	4.10	104	1,436	6,389	1.56	0.71
0600.2530.0400	6.00	152	2.50	64	400	7.14	70	2.40	61	3.60	92	1,441	6,408	1.57	0.84
0600.2530.0450	6.00	152	2.50	64	450	8.05	79	2.20	56	3.82	97	1,716	7,633	1.90	0.86
0600.2530.0500	6.00	152	2.50	64	500	8.94	88	2.24	57	3.74	95	1,882	8,371	1.98	0.90
0600.2530.0550	6.00	152	2.50	64	550	9.84	96	2.28	58	3.70	94	2,042	9,085	2.07	0.94
0600.2530.0600	6.00	152	2.50	64	600	10.71	105	2.36	60	3.62	92	2,184	9,717	2.18	0.99
8.00 (length in inches)															
0800.2530.0225	8.00	203	2.50/3.0	64	225	4.02	39	2.58	66	5.41	137	1,217	5,414	2.21	1.00
0800.2530.0250	8.00	203	2.50/3.0	64	250	4.46	44	2.60	66	5.39	137	1,347	5,991	2.29	1.04
0800.2530.0275	8.00	203	2.50/3.0	64	275	4.91	48	2.64	67	5.35	136	1,470	6,539	2.38	1.08
0800.2530.0300	8.00	203	2.50/3.0	64	300	5.36	53	2.64	67	5.35	136	1,604	7,136	2.31	1.05
0800.2530.0350	8.00	203	2.50/3.0	64	350	6.25	61	2.83	72	5.16	131	1,805	8,030	2.58	1.17
0800.2530.0400	8.00	203	2.50/3.0	64	400	7.14	70	2.83	72	5.16	131	2,056	9,145	2.65	1.20
0800.2530.0425	8.00	203	2.50/3.0	64	425	7.59	74	2.81	71	5.20	132	2,208	9,820	3.31	1.50
0800.2530.0450	8.00	203	2.50/3.0	64	450	8.05	79	2.94	75	5.06	128	2,276	10,126	2.58	1.39
0800.2530.0475	8.00	203	2.50/3.0	64	475	8.50	83	2.86	73	5.14	131	2,441	10,856	3.31	1.50
0800.2530.0500	8.00	203	2.50/3.0	64	500	8.94	88	2.95	75	5.05	128	2,524	11,226	2.65	1.42
0800.2530.0525	8.00	203	2.50/3.0	64	525	9.39	92	2.97	76	5.03	128	2,639	11,737	3.53	1.60
0800.2530.0550	8.00	203	2.50/3.0	64	550	9.84	96	3.12	79	4.88	124	2,683	11,934	3.06	1.58
10.00 (length in inches)															
1000.2530.0225	10.00	254	2.50/3.0	64	225	4.02	39	3.03	77	6.97	177	1,568	6,974	3.13	3.13
1000.2530.0250	10.00	254	2.50/3.0	64	250	4.46	44	3.03	77	6.97	177	1,742	7,749	3.20	3.20
1000.2530.0300	10.00	254	2.50/3.0	64	300	5.36	53	3.15	80	6.85	174	2,050	9,119	3.46	3.46
1000.2530.0350	10.00	254	2.50/3.0	64	350	6.25	61	3.39	86	6.61	168	2,311	10,280	3.86	3.86
1000.2530.0400	10.00	254	2.50/3.0	64	400	7.14	70	3.62	92	6.38	162	2,546	11,325	4.30	4.30
1000.2530.0450	10.00	254	2.50/3.0	64	450	8.05	79	3.94	100	6.06	154	2,728	12,135	4.80	4.80
1000.2530.0500	10.00	254	2.50/3.0	64	500	8.94	88	4.02	102	5.98	152	2,992	13,309	4.98	4.98
1000.2530.0550	10.00	254	2.50/3.0	64	550	9.84	96	3.94	100	6.06	154	3,334	14,832	4.96	4.96
1000.2530.0600	10.00	254	2.50/3.0	64	600	10.71	105	4.34	110	5.66	144	3,396	15,108	5.64	5.64
12.00 (length in inches)															
1200.2530.0100	12.00	305	2.50/3.0	64	100	1.78	18	2.68	68	9.32	237	932	4,146	2.42	1.10
1200.2530.0125	12.00	305	2.50/3.0	64	125	2.23	22	2.83	72	9.17	233	1,146	5,098	2.67	1.21
1200.2530.0150	12.00	305	2.50/3.0	64	150	2.68	26	3.04	77	8.96	228	1,344	5,978	3.00	1.36
1200.2530.0165	12.00	305	2.50/3.0	64	165	2.95	29	3.23	82	8.78	223	1,439	6,445	3.30	1.50
1200.2530.0175	12.00	305	2.50/3.0	64	175	3.13	31	3.29	84	8.71	221	1,524	6,779	3.37	1.53
1200.2530.0185	12.00	305	2.50/3.0	64	185	3.30	32	3.29	84	8.71	221	1,549	6,890	3.37	1.53

XT BARREL | 2.50" Extreme Travel Continued

Part Number	Length		Inside Diameter		Rate			Block Height		Travel		Load at Block Height		Weight	
	inch	mm	inch	mm	lbs/inch	kg/mm	N/mm	inch	mm	inch	mm	lbs	N	lbs	kg
1200.2530.0200	12.00	305	2.50/3.0	64	200	3.57	35	3.28	83	8.72	221	1,744	7,758	3.42	1.55
1200.2530.0225	12.00	305	2.50/3.0	64	225	4.02	39	3.61	92	8.39	213	1,888	8,398	3.95	1.79
1200.2530.0250	12.00	305	2.50/3.0	64	250	4.46	44	3.66	93	8.34	212	2,085	9,274	4.06	1.84
1200.2530.0275	12.00	305	2.50/3.0	64	275	4.91	48	3.70	94	8.30	211	2,282	10,151	4.19	1.90
1200.2530.0300	12.00	305	2.50/3.0	64	300	5.36	53	3.78	96	8.23	209	2,463	10,955	4.37	1.98
1200.2530.0325	12.00	305	2.50/3.0	64	325	5.80	57	3.94	100	8.07	205	2,519	11,205	4.59	2.08
1200.2530.0350	12.00	305	2.50/3.0	64	350	6.25	61	4.02	102	7.99	203	2,794	12,427	4.79	2.17
1200.2530.0375	12.00	305	2.50/3.0	64	375	6.70	66	4.17	106	7.83	199	2,934	13,051	5.07	2.30
14.00 (length in inches)															
1400.2530.0100	14.00	356	2.50/3.0	64	100	1.78	18	3.35	85	10.67	271	1,065	4,738	3.19	1.45
1400.2530.0125	14.00	356	2.50/3.0	64	125	2.23	22	3.49	89	10.51	267	1,313	5,840	3.46	1.57
1400.2530.0150	14.00	356	2.50/3.0	64	150	2.68	26	3.72	94	10.28	261	1,541	6,855	3.86	1.75
1400.2530.0175	14.00	356	2.50/3.0	64	175	3.13	31	4.01	102	9.99	254	1,749	7,780	4.32	1.96
1400.2530.0185	14.00	356	2.50/3.0	64	185	3.30	32	4.23	108	9.77	248	1,807	8,036	4.67	2.12
1400.2530.0200	14.00	356	2.50/3.0	64	200	3.57	35	3.98	101	10.02	255	2,004	8,914	4.36	1.98
1400.2530.0225	14.00	356	2.50/3.0	64	225	4.02	39	5.32	135	8.64	220	1,953	8,687	4.93	2.24
1400.2530.0250	14.00	356	2.50/3.0	64	250	4.46	44	4.38	111	9.62	244	2,405	10,698	5.09	2.31
1400.2530.0275	14.00	356	2.50/3.0	64	275	4.91	48	4.84	123	9.13	232	2,512	11,176	5.88	2.67
1400.2530.0300	14.00	356	2.50/3.0	64	300	5.36	53	4.96	126	9.06	230	2,713	12,068	6.13	2.78
16.00 (length in inches)															
1600.2530.0100	16.00	406	2.50/3.0	64	100	1.78	18	3.75	95	12.25	311	1,225	5,447	3.68	1.67
1600.2530.0125	16.00	406	2.50/3.0	64	125	2.23	22	3.90	99	12.09	307	1,513	6,731	3.97	1.80
1600.2530.0150	16.00	406	2.50/3.0	64	150	2.68	26	5.20	132	10.79	274	1,619	7,201	4.25	1.93
1600.2530.0175	16.00	406	2.50/3.0	64	175	3.13	31	4.45	113	11.54	293	2,022	8,996	4.91	2.23
1600.2530.0200	16.00	406	2.50/3.0	64	200	3.57	35	5.29	134	10.71	272	2,142	9,526	1.29	2.82
1600.2530.0225	16.00	406	2.50/3.0	64	225	4.02	39	5.22	133	10.79	274	2,425	10,788	1.29	2.83
1600.2530.0250	16.00	406	2.50/3.0	64	250	4.46	44	5.27	134	10.75	273	2,682	11,930	1.32	2.90
Tender/Linear															
0175.250.0150	2.64	67	2.50	64	150	2.68	26	0.89	23	1.75	44	263	1,170	0.90	0.41
0175.250.0200	3.00	76	2.50	64	200	3.57	35	1.30	33	1.75	45	350	1,558	1.48	0.67
0175.250.0250	2.79	71	2.50	64	250	4.46	44	1.04	26	1.75	44	438	1,948	1.28	0.58
0175.250.0300	3.27	83	2.50	64	300	5.36	53	2.02	51	1.75	44	525	2,335	1.92	0.87
0200.250.1300	2.01	51	2.50	64	1,300	23.22	228	1.22	31	0.79	20	947	4,212	0.81	0.37
0225.250.0150	3.90	99	2.50	64	150	2.68	26	1.65	42	2.25	57	334	1,486	1.92	0.87
0225.250.0200	3.55	90	2.50	64	200	3.57	35	1.30	33	2.25	57	450	2,000	1.48	0.67
0225.250.0250	3.94	100	2.50	64	250	4.46	44	1.69	43	2.25	57	563	2,504	2.18	0.99
0225.250.0300	3.94	100	2.50	64	300	5.36	53	1.69	43	2.25	57	675	3,003	2.23	1.01
0350.250.0025	5.00	127	2.50	64	25	0.45	4	1.26	32	3.74	95	94	416	1.04	0.47
0350.250.0050	5.00	127	2.50	64	50	0.89	9	1.38	35	3.62	92	182	809	1.17	0.53
0350.250.0075	5.00	127	2.50	64	77	1.37	13	1.38	35	3.62	92	272	1,210	1.56	0.71
0350.250.0100	4.72	120	2.50	64	100	1.78	18	1.17	30	3.56	90	355	1,580	1.23	0.56
Tender/Progressive															
0175.250.600-1300	3.55	90	2.50	64	600/1300	10.7/23.2	105/228	1.84	47	1.70	43	1,513	6,731	1.90	0.86
0200.250.175-550	4.25	108	2.50	64	175 / 550	3.13 / 9.82	31 / 96	2.20	56	2.05	52	739	3,287	2.42	1.10
0200.250.175-650	4.25	108	2.50	64	175 / 650	3.13 / 11.61	31 / 114	2.20	56	2.05	52	846	3,763	2.42	1.10
0200.250.250-550	3.46	88	2.50	64	250 / 550	4.46 / 9.82	44 / 95	1.50	38	1.97	50	877	3,900	1.81	0.82
0200.250.250-650	4.84	123	2.50	64	250 / 650	4.46 / 11.61	44 / 114	2.80	71	2.05	52	924	4,112	3.09	1.40
Helper															
HELPER250	3.00	76	2.50	64	11	0.20	2	0.50	13	2.52	64	28	126	0.30	0.12
HELPER250T	6.00	152	2.50	64	5	0.09	1	0.65	16	5.37	136	27	120	0.45	0.21
Spacer															
SPACER250			2.50	64											
Adapter 60mm - 2.50"															
ADAPTER60-250			2.50	64											
Torsion Release Bearing															
TRB250			2.50	64											

PLATINUM XT BARREL

2.50" - 4.00" Extreme Travel

Eibach has developed a range of PLATINUM BARREL race springs, built to outperform all other springs in their class! With the overwhelming popularity of our current XT BARREL Series springs, we found a need to push the limits of performance even further. These springs provide unparalleled grip levels at dynamic race conditions by combining the extreme travel of our proprietary Eibach PLATINUM spring wire and world-renowned German engineering processes. Want the winning edge—look no further, these springs were engineered to win!



Part Number	Length		Inside Diameter		Rate			Block Height		Travel		Load at Block Height		Weight	
	inch	mm	inch	mm	lbs/inch	kg/mm	N/mm	inch	mm	inch	mm	lbs	N	lbs	kg
10.00 (length in inches)															
P1000.2530.0150	10.00	254	2.50	64	150	2.68	26	2.68	68	7.32	186	1,100	4,895	2.65	1.20
P1000.2530.0175	10.00	254	2.50	64	175	3.12	31	2.72	69	7.27	185	1,272	5,659	3.53	1.60
P1000.2530.0200	10.00	254	2.50	64	200	3.57	35	2.86	73	7.14	181	1,428	6,353	3.53	1.60
P1000.2530.0225	10.00	254	2.50	64	225	4.03	39	2.76	70	7.24	184	1,629	7,244	3.10	1.40
P1000.2530.0250	10.00	254	2.50	64	250	4.46	44	3.06	78	6.95	177	1,737	7,725	3.53	1.60
P1000.2530.0300	10.00	254	2.50	64	300	5.37	53	2.89	74	7.11	181	2,132	9,481	3.50	1.60
P1000.2530.0350	10.00	254	2.50	64	350	6.26	61	3.06	78	6.94	176	2,428	10,800	3.70	1.70
P1000.2530.0400	10.00	254	2.50	64	400	7.16	70	3.24	82	6.77	172	2,706	12,036	4.19	1.90
P1000.2530.0450	10.00	254	2.50	64	450	8.05	79	3.52	89	6.48	165	2,916	12,972	4.60	2.10
P1000.2530.0500	10.00	254	2.50	64	500	8.94	88	3.76	96	6.24	159	3,120	13,879	5.29	2.40
P1000.2530.0550	10.00	254	2.50	64	550	9.84	96	3.77	96	6.23	158	3,428	15,246	8.38	3.80
12.00 (length in inches)															
P1200.2530.0100	12.00	305	2.50	64	100	1.79	18	2.64	67	9.36	238	936	4,164	2.64	1.20
P1200.2530.0125	12.00	305	2.50	64	125	2.24	22	2.62	66.60	9.38	238	1,172	5,214	2.60	1.20
P1200.2530.0150	12.00	305	2.50	64	150	2.68	26	2.80	71	9.21	234	1,381	6,143	3.10	1.40
P1200.2530.0175	12.00	305	2.50	64	175	3.13	31	3.44	87	8.56	217	1,498	6,661	3.97	1.80
P1200.2530.0200	12.00	305	2.50	64	200	3.58	35	3.15	79.90	8.85	225	1,771	7,876	3.70	1.70
P1200.2530.0225	12.00	305	2.50	64	225	4.03	39	3.26	82.80	8.74	222	1,967	8,747	4.00	1.80
P1200.2530.0250	12.00	305	2.50	64	250	4.46	44	3.59	91	8.41	214	2,102	9,349	4.41	2.00
14.00 (length in inches)															
P1400.2530.0100	14.00	356	2.50	64	100	1.78	18	2.80	71	11.22	285	1,120	4,983	2.87	1.30
P1400.2530.0125	14.00	356	2.50	64	125	2.24	22	3.19	81	10.83	275	1,353	6,019	3.53	1.60
P1400.2530.0150	14.00	356	2.50	64	150	2.68	26	3.35	85	10.67	271	1,595	7,096	3.75	1.70
P1400.2530.0175	14.00	356	2.50	64	175	3.13	31	3.62	92	10.39	264	1,818	8,087	4.19	1.90
P1400.2530.0200	14.00	356	2.50	64	200	3.58	35	3.96	101	10.05	255	2,009	8,935	4.85	2.20
P1400.2530.0225	14.00	356	2.50	64	225	4.03	39	4.28	109	9.72	247	2,187	9,726	5.51	2.50
P1400.2530.0250	14.00	356	2.50	64	250	4.46	44	4.29	109	9.72	247	2,425	10,787	5.51	2.50
16.00 (length in inches)															
P1600.2530.0050	16.00	406	2.50	64	50	0.89	9	3.05	77	12.95	329	647	2,882	2.63	1.30
P1600.2530.0075	16.00	406	2.50	64	075	1.34	13	3.46	88	12.52	318	940	4,181	3.52	1.60
P1600.2530.0100	16.00	406	2.50	64	100	1.79	18	3.62	92	12.42	316	1,238	5,507	3.97	1.80
P1600.2530.0125	16.00	406	2.50	64	125	2.24	22	4.21	107	11.79	300	1,474	6,557	4.85	2.20
P1600.2530.0150	16.00	406	2.50	64	150	2.68	26	4.39	112	11.61	295	1,741	7,744	5.29	2.40
P1600.2530.0175	16.00	406	2.50	64	175	3.13	31	4.65	118	11.38	289	1,989	8,848	5.73	2.60
P1600.2530.0200	16.00	406	2.50	64	200	3.58	35	4.72	120	11.30	287	2,256	10,035	6.17	2.80

COILOVER (STANDARD)

2.50" Coilover Springs



Part Number	Length		Inside Diameter		Rate			Block Height		Travel		Load at Block Height		Weight	
	inch	mm	inch	mm	lbs/inch	kg/mm	N/mm	inch	mm	inch	mm	lbs	N	lbs	kg
4.00 (length in inches)															
0400.250.0300	4.00	102	2.50	64	300	5.36	53	1.44	37	2.56	65	768	3,417	0.88	0.40
0400.250.0400	4.00	102	2.50	64	400	7.14	70	1.57	40	2.43	62	973	4,330	1.10	0.50
0400.250.0500	4.00	102	2.50	64	500	8.94	88	1.65	42	2.35	60	1,175	5,225	1.10	0.50
0400.250.0600	4.00	102	2.50	64	600	10.71	105	1.74	44	2.26	58	1,359	6,044	1.32	0.60
0400.250.0700	4.00	102	2.50	64	700	12.50	123	1.82	46	2.18	55	1,526	6,787	1.32	0.60
6.00 (length in inches)															
0600.250.0350	6.00	152	2.50	64	348	6.22	61	2.20	56	3.78	96	1,328	5,908	1.61	0.73
0600.250.0400	6.00	152	2.50	64	400	7.14	70	2.40	61	3.60	91	1,439	6,401	1.85	0.84
0600.250.0450	6.00	152	2.50	64	450	8.05	79	2.39	61	3.61	92	1,624	7,224	1.90	0.86
0600.250.0500	6.00	152	2.50	64	500	8.94	88	2.38	60	3.62	92	1,809	8,047	1.92	0.87
0600.250.0550	6.00	152	2.50	64	550	9.84	96	2.44	62	3.56	90	1,960	8,718	2.03	0.92
0600.250.0600	6.00	152	2.50	64	600	10.71	105	2.68	68	3.32	84	1,990	8,852	2.35	1.07
0600.250.0650	6.00	152	2.50	64	650	11.61	114	2.69	68	3.31	84	2,149	9,559	2.42	1.10
0600.250.0700	6.00	152	2.50	64	700	12.50	123	2.57	65	3.43	87	2,397	10,662	2.29	1.04
0600.250.0750	6.00	152	2.50	64	750	13.39	131	2.65	67	3.35	85	2,510	11,165	2.42	1.10
0600.250.0800	6.00	152	2.50	64	800	14.28	140	2.71	69	3.29	84	2,634	11,717	2.53	1.15
0600.250.0850	6.00	152	2.50	64	850	15.17	149	2.79	71	3.21	82	2,732	12,152	2.67	1.21
0600.250.0900	6.00	152	2.50	64	900	16.07	158	2.87	73	3.13	80	2,820	12,544	2.82	1.28
0600.250.0950	6.00	152	2.50	64	950	16.96	166	2.92	74	3.08	78	2,924	13,007	2.93	1.33
0600.250.1000	6.00	152	2.50	64	1,000	17.85	175	2.92	74	3.08	78	3,076	13,683	3.00	1.36
0600.250.1100	6.00	152	2.50	64	1,100	19.64	193	3.00	76	3.00	76	3,295	14,657	3.15	1.43
0600.250.1200	6.00	152	2.50	64	1,200	21.42	210	3.03	77	2.97	75	3,562	15,844	3.24	1.47
0600.250.1300	6.00	152	2.50	64	1,300	23.22	228	3.19	81	2.81	71	3,634	16,165	3.57	1.62
7.00 (length in inches)															
0700.250.0100	7.00	178	2.50	64	100	1.78	18	1.97	50	5.04	128	505	2,247	1.10	0.50
0700.250.0275	7.00	178	2.50	64	275	4.91	48	2.54	65	4.46	113	1,226	5,453	1.95	0.88
0700.250.0300	7.00	178	2.50	64	300	5.36	53	2.48	63	4.52	115	1,356	6,032	1.83	0.83
0700.250.0325	7.00	178	2.50	64	325	5.80	57	2.54	65	4.46	113	1,449	6,445	1.92	0.87
0700.250.0350	7.00	178	2.50	64	350	6.25	61	2.65	67	4.35	110	1,525	6,784	2.06	0.93
0700.250.0375	7.00	178	2.50	64	375	6.70	66	2.71	69	4.29	109	1,609	7,157	2.17	0.98
0700.250.0400	7.00	178	2.50	64	400	7.14	70	2.81	71	4.19	106	1,675	7,451	2.32	1.05
0700.250.0450	7.00	178	2.50	64	450	8.05	79	2.81	71	4.19	106	1,884	8,380	2.36	1.07
0700.250.0500	7.00	178	2.50	64	500	8.94	88	2.81	71	4.19	106	2,096	9,323	2.42	1.10
0700.250.0550	7.00	178	2.50	64	550	9.84	96	3.07	78	3.93	100	2,161	9,613	2.79	1.27
0700.250.0600	7.00	178	2.50	64	600	10.71	105	3.09	78	3.91	99	2,348	10,444	2.87	1.30
0700.250.0650	7.00	178	2.50	64	650	11.61	114	3.15	80	3.85	98	2,504	11,138	3.00	1.36
0700.250.0700	7.00	178	2.50	64	700	12.50	123	3.20	81	3.80	97	2,660	11,834	2.93	1.33
0700.250.0750	7.00	178	2.50	64	750	13.39	131	3.23	82	3.78	96	2,813	12,511	3.24	1.47
0700.250.0800	7.00	178	2.50	64	800	14.28	140	3.35	85	3.65	93	2,918	12,978	3.22	1.46
0700.250.0900	7.00	178	2.50	64	900	16.07	158	3.51	89	3.49	89	3,142	13,978	3.53	1.60
0700.250.1000	7.00	178	2.50	64	1,000	17.85	175	3.52	89	3.48	88	3,481	15,484	3.62	1.64
8.00 (length in inches)															
0800.250.0100	8.00	203	2.50	64	100	1.78	18	2.12	54	5.88	149	588	2,615	1.17	0.53
0800.250.0125	8.00	203	2.50	64	125	2.23	22	2.26	57	5.74	146	718	3,192	1.34	0.61
0800.250.0150	8.00	203	2.50	64	150	2.68	26	2.55	65	5.45	138	817	3,634	1.63	0.74
0800.250.0175	8.00	203	2.50	64	175	3.13	31	2.68	68	5.32	135	931	4,141	1.90	0.86
0800.250.0200	8.00	203	2.50	64	200	3.57	35	2.67	68	5.33	135	1,065	4,737	1.95	0.88

COILOVER (STANDARD) | 2.50" I.D. Continued

Part Number	Length		Inside Diameter		Rate			Block Height		Travel		Load at Block Height		Weight	
	inch	mm	inch	mm	lbs/inch	kg/mm	N/mm	inch	mm	inch	mm	lbs	N	lbs	kg
8.00 (length in inches)															
0800.250.0225	8.00	203	2.50	64	225	4.02	39	2.71	69	5.29	134	1,191	5,298	2.03	0.92
0800.250.0250	8.00	203	2.50	64	250	4.46	44	2.83	72	5.17	131	1,291	5,743	2.12	0.96
0800.250.0300	8.00	203	2.50	64	300	5.36	53	2.96	75	5.04	128	1,513	6,730	2.33	1.06
0800.250.0325	8.00	203	2.50	64	325	5.80	57	3.05	77	4.95	126	1,609	7,157	2.46	1.12
0800.250.0350	8.00	203	2.50	64	350	6.25	61	3.12	79	4.88	124	1,709	7,602	2.59	1.17
0800.250.0375	8.00	203	2.50	64	375	6.70	66	3.23	82	4.77	121	1,787	7,949	2.76	1.25
0800.250.0400	8.00	203	2.50	64	400	7.14	70	3.08	78	4.92	125	1,968	8,754	2.61	1.18
0800.250.0425	8.00	203	2.50	64	425	7.59	74	3.17	81	4.83	123	2,053	9,132	2.76	1.25
0800.250.0450	8.00	203	2.50	64	450	8.05	79	3.28	83	4.72	120	2,122	9,439	2.94	1.33
0800.250.0475	8.00	203	2.50	64	475	8.50	83	3.40	86	4.60	117	2,184	9,715	3.12	1.42
0800.250.0500	8.00	203	2.50	64	500	8.94	88	3.28	83	4.72	120	2,358	10,489	3.00	1.36
0800.250.0525	8.00	203	2.50	64	525	9.39	92	3.42	87	4.58	116	2,402	10,685	3.22	1.46
0800.250.0550	8.00	203	2.50	64	550	9.84	96	3.57	91	4.43	113	2,437	10,840	3.44	1.56
0800.250.0600	8.00	203	2.50	64	600	10.71	105	3.59	91	4.41	112	2,646	11,770	3.53	1.60
0800.250.0650	8.00	203	2.50	64	650	11.61	114	3.63	92	4.37	111	2,838	12,624	3.66	1.66
0800.250.0700	8.00	203	2.50	64	700	12.50	123	3.65	93	4.35	110	3,043	13,536	3.75	1.70
0800.250.0750	8.00	203	2.50	64	750	13.39	131	3.72	94	4.28	109	3,209	14,274	3.90	1.77
0800.250.0800	8.00	203	2.50	64	800	14.28	140	3.79	96	4.21	107	3,368	14,982	4.06	1.84
0800.250.0850	8.00	203	2.50	64	850	15.17	149	3.86	98	4.14	105	3,520	15,658	4.23	1.92
0800.250.0900	8.00	203	2.50	64	900	16.07	158	3.93	100	4.07	103	3,665	16,303	4.39	1.99
0800.250.1000	8.00	203	2.50	64	1,000	17.85	175	4.12	105	3.88	99	3,877	17,246	4.80	2.18
0800.250.1100	8.00	203	2.50	64	1,100	19.64	193	4.07	103	3.93	100	4,317	19,203	4.85	2.20
0800.250.1200	8.00	203	2.50	64	1,200	21.42	210	4.30	109	3.70	94	4,437	19,737	5.33	2.42
0800.250.1300	8.00	203	2.50	64	1,300	23.22	228	4.53	115	3.47	88	4,503	20,031	5.73	2.60
0800.250.1400	8.00	203	2.50	64	1,400	25.00	245	4.53	115	3.47	88	4,840	21,529	5.95	2.70
0800.250.1500	8.00	203	2.50	64	1,500	26.79	263	6.10	155	1.90	48	5,178	23,034	5.95	2.70
8.00 (length in inches) (Silver)															
0800.250.0150S	8.00	203	2.50	64	150	2.68	26	2.55	65	5.45	138	817	3,634	1.63	0.74
0800.250.0200S	8.00	203	2.50	64	200	3.57	35	2.67	68	5.33	135	1,065	4,737	1.94	0.88
0800.250.0250S	8.00	203	2.50	64	250	4.46	44	2.83	72	5.17	131	1,291	5,743	2.12	0.96
0800.250.0300S	8.00	203	2.50	64	300	5.36	53	2.96	75	5.04	128	1,513	6,730	2.34	1.06
0800.250.0350S	8.00	203	2.50	64	350	6.25	61	3.12	79	4.88	124	1,709	7,602	2.58	1.17
0800.250.0400S	8.00	203	2.50	64	400	7.14	70	3.08	78	4.92	125	1,968	8,754	2.62	1.19
0800.250.0500S	8.00	203	2.50	64	500	8.94	88	3.28	83	4.72	120	2,358	10,489	3.00	1.36
0800.250.0600S	8.00	203	2.50	64	600	10.71	105	3.59	91	4.41	112	2,646	11,770	3.53	1.60
10.00 (length in inches)															
1000.250.0100	10.00	254	2.50	64	100	1.78	18	3.28	83	6.72	171	671	2,985	2.11	0.96
1000.250.0150	10.00	254	2.50	64	150	2.68	26	3.52	89	6.48	165	972	4,324	2.51	1.14
1000.250.0162	10.00	254	2.50	64	162	2.89	28	3.61	92	6.39	162	1,035	4,604	2.67	1.21
1000.250.0175	10.00	254	2.50	64	175	3.13	31	3.32	84	6.68	170	1,169	5,200	2.51	1.14
1000.250.0200	10.00	254	2.50	64	200	3.57	35	3.39	86	6.61	168	1,323	5,885	2.53	1.15
1000.250.0225	10.00	254	2.50	64	225	4.02	39	3.39	86	6.61	168	1,487	6,614	2.62	1.19
1000.250.0250	10.00	254	2.50	64	250	4.46	44	3.72	94	6.28	160	1,569	6,979	3.06	1.39
1000.250.0250-0425	10.00	254	2.50	64	250-425	4.47-7.60	44-74	5.31	135	4.69	119	1,813	8,069	4.71	2.20
1000.250.0275	10.00	254	2.50	64	275	4.91	48	3.77	96	6.23	158	1,715	7,629	3.17	1.44
1000.250.0300	10.00	254	2.50	64	300	5.36	53	3.85	98	6.15	156	1,844	8,202	3.33	1.51
1000.250.0325	10.00	254	2.50	64	325	5.80	57	3.94	100	6.06	154	1,971	8,767	3.49	1.58
1000.250.0350	10.00	254	2.50	64	350	6.25	61	4.02	102	5.98	152	2,092	9,306	3.66	1.66
1000.250.0375	10.00	254	2.50	64	375	6.70	66	4.11	104	5.89	150	2,208	9,822	3.83	1.74
1000.250.0400	10.00	254	2.50	64	400	7.14	70	4.24	108	5.76	146	2,302	10,240	4.05	1.84
1000.250.0425	10.00	254	2.50	64	425	7.59	74	4.36	111	5.64	143	2,399	10,671	4.25	1.93
1000.250.0450	10.00	254	2.50	64	450	8.05	79	4.16	106	5.84	148	2,630	11,699	4.03	1.83
1000.250.0475	10.00	254	2.50	64	475	8.50	83	4.29	109	4.53	115	2,711	12,060	4.27	1.94
1000.250.0500	10.00	254	2.50	64	500	8.94	88	4.43	113	5.57	141	2,786	12,393	4.52	2.05
1000.250.0525	10.00	254	2.50	64	525	9.39	92	4.59	117	5.41	137	2,840	12,633	4.80	2.18
1000.250.0550	10.00	254	2.50	64	550	9.84	96	4.43	113	5.57	141	3,061	13,616	4.63	2.10
1000.250.0575	10.00	254	2.50	64	575	10.28	101	4.57	116	5.43	138	3,121	13,883	4.87	2.21

COILOVER (STANDARD) | 2.50" Continued

Part Number	Length		Inside Diameter		Rate			Block Height		Travel		Load at Block Height		Weight	
	inch	mm	inch	mm	lbs/inch	kg/mm	N/mm	inch	mm	inch	mm	lbs	N	lbs	kg
12.00 (length in inches) (Silver)															
1200.250.0275S	12.00	305	2.50	64	275	4.91	48	4.48	114	7.52	191	2,067	9,194	4.01	1.82
1200.250.0300S	12.00	305	2.50	64	300	5.36	53	4.96	126	7.04	179	2,112	9,395	4.67	2.12
1200.250.0325S	12.00	305	2.50	64	325	5.80	57	5.02	128	6.98	177	2,270	10,097	4.83	2.19
1200.250.0350S	12.00	305	2.50	64	350	6.25	61	5.12	130	6.88	175	2,408	10,711	5.05	2.29
1200.250.0375S	12.00	305	2.50	64	375	6.70	66	5.22	133	6.78	172	2,542	11,307	5.27	2.39
1200.250.0400S	12.00	305	2.50	64	400	7.14	70	5.32	135	6.68	170	2,670	11,877	5.51	2.50
1200.250.0425S	12.00	305	2.50	64	425	7.59	74	5.43	138	6.57	167	2,794	12,428	5.73	2.60
1200.250.0450S	12.00	305	2.50	64	450	8.05	79	5.22	133	6.78	172	3,052	13,576	5.51	2.50
1200.250.0475S	12.00	305	2.50	64	475	8.50	83	5.34	136	6.66	169	3,162	14,065	5.75	2.61
1200.250.0500S	12.00	305	2.50	64	500	8.94	88	5.49	139	6.51	165	3,252	14,466	6.06	2.75
1200.250.0550S	12.00	305	2.50	64	550	9.84	96	5.83	148	6.17	157	3,390	15,079	6.72	3.05
1200.250.0600S	12.00	305	2.50	64	600	10.71	105	5.82	148	6.18	157	3,706	16,485	6.83	3.10
1200.250.0650S	12.00	305	2.50	64	650	11.61	114	5.81	148	6.19	157	4,025	17,904	6.94	3.15
1200.250.0700S	12.00	305	2.50	64	700	12.50	123	5.85	149	6.15	156	4,307	19,158	7.12	3.23
1200.250.0750S	12.00	305	2.50	64	750	13.39	131	5.88	149	6.12	155	4,586	20,399	7.32	3.32
1200.250.0800S	12.00	305	2.50	64	800	14.28	140	5.92	150	6.08	154	4,864	21,636	7.49	3.40
1200.250.0900S	12.00	305	2.50	64	900	16.07	158	6.40	163	5.60	142	5,041	22,423	8.60	3.90
14.00 (length in inches)															
1400.250.0080	14.00	356	2.50	64	80	1.43	14	3.93	100	10.07	256	806	3,585	2.56	1.16
1400.250.0090	14.00	356	2.50	64	90	1.61	16	4.81	122	9.19	233	827	3,679	3.39	1.54
1400.250.0100	14.00	356	2.50	64	100	1.78	18	4.39	112	9.61	244	961	4,275	3.09	1.40
1400.250.0110	14.00	356	2.50	64	110	1.96	19	5.03	128	8.97	228	987	4,390	3.77	1.71
1400.250.0120	14.00	356	2.50	64	120	2.14	21	4.55	116	9.45	240	1,134	5,044	3.48	1.58
1400.250.0130	14.00	356	2.50	64	130	2.32	23	4.84	123	9.16	233	1,190	5,293	3.72	1.69
1400.250.0140	14.00	356	2.50	64	140	2.50	25	4.53	115	9.47	241	1,326	5,898	3.48	1.58
1400.250.0150	14.00	356	2.50	64	150	2.68	26	4.72	120	9.28	236	1,391	6,187	3.72	1.69
1400.250.0175	14.00	356	2.50	64	175	3.13	31	5.04	128	8.96	228	1,568	6,975	4.21	1.91
1400.250.0200	14.00	356	2.50	64	200	3.57	35	4.92	118	9.35	238	1,873	8,331	4.21	1.91
1400.250.0225	14.00	356	2.50	64	225	4.02	39	5.32	135	8.68	220	1,953	8,687	4.80	2.18
1400.250.0250	14.00	356	2.50	64	250	4.46	44	5.32	135	8.68	220	2,170	9,653	4.91	2.23
1400.250.0275	14.00	356	2.50	64	275	4.91	48	5.79	147	8.21	209	2,258	10,044	5.62	2.55
1400.250.0300	14.00	356	2.50	64	300	5.36	53	5.81	148	8.19	208	2,458	10,934	5.77	2.62
1400.250.0325	14.00	356	2.50	64	325	5.80	57	5.90	150	8.10	206	2,633	11,712	5.99	2.72
1400.250.0350	14.00	356	2.50	64	350	6.25	61	5.96	151	8.04	204	2,812	12,508	6.19	2.81
1400.250.0400	14.00	356	2.50	64	400	7.14	70	6.19	157	7.81	198	3,123	13,892	6.72	3.05
1400.250.0450	14.00	356	2.50	64	450	8.05	79	6.48	165	7.52	191	3,385	15,057	7.34	3.33
14.00 (length in inches) (Silver)															
1400.250.0100S	14.00	356	2.50	64	100	1.78	18	4.39	112	9.61	244	961	4,275	3.09	1.40
1400.250.0125S	14.00	356	2.50	64	125	2.23	22	5.00	127	9.00	229	1,125	5,004	3.86	1.75
1400.250.0130S	14.00	356	2.50	64	130	2.32	23	4.84	123	9.16	233	1,190	5,293	3.72	1.69
1400.250.0150S	14.00	356	2.50	64	150	2.68	26	4.72	120	9.28	236	1,391	6,187	3.72	1.69
1400.250.0165S	14.00	356	2.50	64	165	2.95	29	4.80	122	9.20	234	1,518	6,752	3.90	1.77
1400.250.0175S	14.00	356	2.50	64	175	3.13	31	5.04	128	8.96	228	1,568	6,975	4.21	1.91
1400.250.0200S	14.00	356	2.50	64	200	3.57	35	4.65	118	9.35	238	1,873	8,331	4.21	1.91
1400.250.0225S	14.00	356	2.50	64	225	4.02	39	5.32	135	8.68	220	1,953	8,687	4.80	2.18
1400.250.0250S	14.00	356	2.50	64	250	4.46	44	5.32	135	8.68	220	2,170	9,653	4.91	2.23
1400.250.0275S	14.00	356	2.50	64	275	4.91	48	5.79	147	8.21	209	2,258	10,044	5.62	2.55
1400.250.0300S	14.00	356	2.50	64	300	5.36	53	5.81	148	8.19	208	2,458	10,934	5.77	2.62
1400.250.0350S	14.00	356	2.50	64	350	6.25	61	5.96	151	8.04	204	2,812	12,508	6.19	2.81
1400.250.0400S	14.00	356	2.50	64	400	7.14	70	6.19	157	7.81	198	3,123	13,892	6.72	3.05
1400.250.0450S	14.00	356	2.50	64	450	8.05	79	6.48	165	7.52	191	3,385	15,057	7.34	3.33
1400.250.0500S	14.00	356	2.50	64	500	8.94	88	6.34	161	7.66	195	3,830	17,037	7.34	3.33
1400.250.0550S	14.00	356	2.50	64	550	9.84	96	6.68	170	7.32	186	4,026	17,908	8.04	3.65
1400.250.0600S	14.00	356	2.50	64	600	10.71	105	6.64	169	7.36	187	4,413	19,630	8.15	3.70
1400.250.0650S	14.00	356	2.50	64	650	11.61	114	7.02	178	6.98	177	4,538	20,186	8.97	4.07
1400.250.0700S	14.00	356	2.50	64	700	12.50	123	7.20	183	6.81	173	4,764	21,192	9.38	4.26

COILOVER (STANDARD) | 2.50" Continued

Part Number	Length		Inside Diameter		Rate			Block Height		Travel		Load at Block Height		Weight	
	inch	mm	inch	mm	lbs/inch	kg/mm	N/mm	inch	mm	inch	mm	lbs	N	lbs	kg
16.00 (length in inches) (Silver)															
1600.250.0080S	16.00	406	2.50	64	80	1.43	14	5.31	135	10.67	271	848	3,800	3.74	1.70
1600.250.0100S	16.00	406	2.50	64	100	1.78	18	4.88	124	11.10	282	1,110	4,937	3.57	1.62
1600.250.0125S	16.00	406	2.50	64	125	2.23	22	5.53	140	10.47	266	1,310	5,825	4.38	1.99
1600.250.0150S	16.00	406	2.50	64	150	2.68	26	5.75	146	10.24	260	1,537	6,835	4.85	2.20
1600.250.0175S	16.00	406	2.50	64	175	3.13	31	6.04	153	9.96	253	1,743	7,751	5.28	2.40
1600.250.0200S	16.00	406	2.50	64	200	3.57	35	6.30	160	9.68	246	2,023	8,999	5.33	2.42
1600.250.0225S	16.00	406	2.50	64	225	4.03	39	6.34	161	9.66	245	2,175	9,677	5.78	2.70
1600.250.0250S	16.00	406	2.50	64	250	4.46	44	6.27	159	9.73	247	2,433	10,822	6.11	2.77
1600.250.0300S	16.00	406	2.50	64	300	5.36	53	6.81	173	9.19	233	2,757	12,264	7.12	3.23
1600.250.0350S	16.00	406	2.50	64	350	6.25	61	6.94	176	9.06	230	3,173	14,114	7.58	3.44
1600.250.0400S	16.00	406	2.50	64	400	7.14	70	7.17	182	8.83	224	3,533	15,715	8.18	3.71
1600.250.0450S	16.00	406	2.50	64	450	8.05	79	7.42	188	8.58	218	3,861	17,175	8.82	4.00
1600.250.0500S	16.00	406	2.50	64	500	8.94	88	7.77	197	8.23	209	4,117	18,313	9.61	4.36
1600.250.0550S	16.00	406	2.50	64	550	9.84	96	8.09	205	7.91	201	4,353	19,363	10.40	4.72
1600.250.0600S	16.00	406	2.50	64	600	10.71	105	8.06	205	7.94	202	4,763	21,187	10.58	4.80
1600.250.0650S	16.00	406	2.50	64	650	11.61	114	8.00	203	8.00	203	5,200	23,131	10.67	4.84
1600.250.0700S	16.00	406	2.50	64	700	12.50	123	8.44	214	7.56	192	5,289	23,527	11.70	5.31
1600.250.0750S	16.00	406	2.50	64	750	13.39	131	8.44	214	7.56	192	5,669	25,217	11.90	5.40
18.00 (length in inches) (Silver)															
1800.250.0100S	18.00	457	2.50	64	100	1.78	18	6.06	154	11.94	303	1,194	5,309	4.63	2.10
1800.250.0125S	18.00	457	2.50	64	125	2.23	22	6.69	170	11.30	287	1,414	6,290	5.64	2.56
1800.250.0150S	18.00	457	2.50	64	150	2.68	26	6.91	176	11.09	282	1,664	7,400	6.17	2.80
1800.250.0175S	18.00	457	2.50	64	175	3.13	31	7.22	183	10.78	274	1,887	8,392	6.83	3.10
1800.250.0200S	18.00	457	2.50	64	200	3.58	35	7.01	178	10.99	279	2,200	9,792	6.42	3.00
1800.250.0225S	18.00	457	2.50	64	225	4.02	39	7.28	185	10.72	272	2,411	10,725	7.27	3.30
Tender/Linear															
0175.250.0150	2.64	67	2.50	64	150	2.68	26	0.89	23	1.75	44	263	1,170	0.90	0.41
0175.250.0200	3.00	76	2.50	64	200	3.57	35	1.30	33	1.75	45	350	1,558	1.48	0.67
0175.250.0250	2.79	71	2.50	64	250	4.46	44	1.04	26	1.75	44	438	1,948	1.28	0.58
0175.250.0300	3.27	83	2.50	64	300	5.36	53	2.02	51	1.75	44	525	2,335	1.92	0.87
0200.250.1300	2.01	51	2.50	64	1,300	23.22	228	1.22	31	0.79	20	947	4,212	0.81	0.37
0225.250.0150	3.90	99	2.50	64	150	2.68	26	1.65	42	2.25	57	334	1,486	1.92	0.87
0225.250.0200	3.55	90	2.50	64	200	3.57	35	1.30	33	2.25	57	450	2,000	1.48	0.67
0225.250.0250	3.94	100	2.50	64	250	4.46	44	1.69	43	2.25	57	563	2,504	2.18	0.99
0225.250.0300	3.94	100	2.50	64	300	5.36	53	1.69	43	2.25	57	675	3,003	2.23	1.01
0350.250.0025	5.00	127	2.50	64	25	0.45	4	1.26	32	3.74	95	94	416	1.04	0.47
0350.250.0050	5.00	127	2.50	64	50	0.89	9	1.38	35	3.62	92	182	809	1.17	0.53
0350.250.0075	5.00	127	2.50	64	77	1.37	13	1.38	35	3.62	92	272	1,210	1.56	0.71
0350.250.0100	4.72	120	2.50	64	100	1.78	18	1.17	30	3.56	90	355	1,580	1.23	0.56
Tender/Progressive															
0175.250.600-1300	3.55	90	2.50	64	600/1300	10.7/23.2	105/228	1.84	47	1.70	43	1,513	6,731	1.90	0.86
0200.250.175-550	4.25	108	2.50	64	175 / 550	3.13 / 9.82	31 / 96	2.20	56	2.05	52	739	3,287	2.42	1.10
0200.250.175-650	4.25	108	2.50	64	175 / 650	3.13 / 11.61	31 / 114	2.20	56	2.05	52	846	3,763	2.42	1.10
0200.250.250-550	3.46	88	2.50	64	250 / 550	4.46 / 9.82	44 / 95	1.50	38	1.97	50	877	3,900	1.81	0.82
0200.250.250-650	4.84	123	2.50	64	250 / 650	4.46 / 11.61	44 / 114	2.80	71	2.05	52	924	4,112	3.09	1.40
Helper															
HELPER250	3.00	76	2.50	64	11	0.20	2	0.50	13	2.52	64	28	126	0.30	0.21
HELPER250T	6.00	152	2.50	64	5	0.09	1	0.65	16	5.37	136	27	120	0.45	
Spacer															
SPACER250			2.50	64											
Adapter															
ADAPTER60-250			2.50	64											
Torsion Release Bearing															
TRB250			2.50	64											



Eibach Racing Off-Road Coilover Springs

- Ultra-lightweight for reduced unsprung mass
- Maximum deflection in combination with smallest block height
- Maintain their dimensions and rates to industry leading tolerances
- Lowest side load center ideally located relative to springs axis



COILOVER (STANDARD) | 3.00"

Part Number	Length		Inside Diameter		Rate			Block Height		Travel		Load at Block Height		Weight	
	inch	mm	inch	mm	lbs/inch	kg/mm	N/mm	inch	mm	inch	mm	lbs	N	lbs	kg
4.00 (length in inches) (Silver)															
0400.300.0250S	4.00	102	3.00	76	250	4.46	44	1.31	33	2.69	68	673	2,992	0.91	0.41
0400.300.0300S	4.00	102	3.00	76	300	5.36	53	1.38	35	2.62	66	785	3,491	1.03	0.46
0400.300.0350S	4.00	102	3.00	76	350	6.25	61	1.40	36	2.60	66	909	4,045	1.06	0.48
0400.300.0400S	4.00	102	3.00	76	400	7.14	70	1.52	39	2.48	63	994	4,420	1.23	0.56
0400.300.0450S	4.00	102	3.00	76	450	8.05	79	1.53	39	2.47	63	1,111	4,936	1.27	0.58
0400.300.0500S	4.00	102	3.00	76	500	8.94	88	1.46	37	2.54	65	1,272	5,657	2.20	0.54
0400.300.0550S	4.00	102	3.00	76	550	9.84	96	1.69	43	2.31	59	1,272	5,653	1.52	0.69
0400.300.0600S	4.00	102	3.00	76	600	10.71	105	1.83	47	2.17	55	1,859	8,261	1.86	0.84
0400.300.0650S	4.00	102	3.00	76	650	11.61	114	1.69	43	2.32	59	1,506	6,698	1.54	0.70
6.00 (length in inches) (Silver)															
0600.300.0100S	6.00	152	3.00	76	100	1.78	18	1.31	33	4.69	119	469	2,085	0.78	0.35
0600.300.0150S	6.00	152	3.00	76	150	2.68	26	1.61	41	4.39	112	659	2,932	1.12	0.51
0600.300.0200S	6.00	152	3.00	76	200	3.57	35	1.78	45	4.24	108	843	3,750	1.37	0.62
0600.300.0250S	6.00	152	3.00	76	250	4.46	44	1.85	47	4.16	106	1,039	4,623	1.50	0.68
0600.300.0300S	6.00	152	3.00	76	300	5.36	53	1.93	49	4.06	103	1,219	5,422	1.65	0.75
0600.300.0350S	6.00	152	3.00	76	350	6.25	61	2.05	52	3.97	101	1,389	6,179	1.83	0.83
0600.300.0400S	6.00	152	3.00	76	400	7.14	70	2.20	56	3.79	96	1,514	6,735	2.12	0.96
0600.300.0450S	6.00	152	3.00	76	450	8.05	79	2.20	56	3.80	97	1,712	7,615	2.14	0.97
0600.300.0500S	6.00	152	3.00	76	500	8.94	88	2.36	60	3.64	92	1,820	8,090	2.44	1.10
0600.300.0550S	6.00	152	3.00	76	550	9.84	96	2.36	60	3.62	92	2,002	8,896	2.50	1.13
0600.300.0600S	6.00	152	3.00	76	600	10.71	105	2.41	61	3.59	91	2,155	9,576	2.61	1.18
0600.300.0700S	6.00	152	3.00	76	700	12.50	123	2.48	63	3.50	89	2,462	10,951	15.18	6.90
0600.300.0800S	6.00	152	3.00	76	800	14.28	140	2.55	65	3.45	88	2,759	12,271	2.99	1.36
7.00 (length in inches)															
0700.300.0250	7.00	178	3.00	76	250	4.46	44	2.57	65	4.43	112	1,107	4,924	1.94	0.88
8.00 (length in inches) (Silver)															
0800.300.0100S	8.00	203	3.00	76	100	1.78	18	2.01	51	5.99	152	599	2,664	1.69	0.77
0800.300.0150S	8.00	203	3.00	76	150	2.68	26	2.06	52	5.94	151	2,107	3,964	1.59	0.72
0800.300.0200S	8.00	203	3.00	76	200	3.57	35	2.36	60	5.64	143	1,128	5,015	2.03	0.92
0800.300.0250S	8.00	203	3.00	76	250	4.46	44	2.62	67	5.38	137	1,345	5,978	2.45	1.11
0800.300.0300S	8.00	203	3.00	76	300	5.36	53	2.66	68	5.34	136	1,604	7,128	2.63	1.19
0800.300.0350S	8.00	203	3.00	76	350	6.25	61	2.82	72	5.18	132	1,814	8,061	2.92	1.32
0800.300.0400S	8.00	203	3.00	76	400	7.14	70	2.99	76	5.01	127	1,870	8,313	3.25	1.47
0800.300.0450S	8.00	203	3.00	76	450	8.05	79	3.16	80	4.84	123	2,179	9,683	3.58	1.62
0800.300.0500S	8.00	203	3.00	76	500	8.94	88	3.12	79	4.88	124	2,441	10,847	3.60	1.63
0800.300.0550S	8.00	203	3.00	76	550	9.82	96	3.35	85	4.65	118	2,558	11,379	4.03	1.83
0800.300.0600S	8.00	203	3.00	76	600	10.71	105	3.36	85	4.64	118	2,788	12,392	4.15	1.88
10.00 (length in inches) (Silver)															
1000.300.0100S	10.00	254	3.00	76	100	1.78	18	2.83	72	7.17	182	716	3,185	2.55	1.16
1000.300.0125S	10.00	254	3.00	76	125	2.23	22	2.84	72	7.16	182	894	3,978	2.34	1.06
1000.300.0150S	10.00	254	3.00	76	150	2.68	26	2.91	74	7.09	180	1,063	4,728	2.54	1.15
1000.300.0175S	10.00	254	3.00	76	175	3.13	31	3.14	80	6.86	174	1,200	5,337	2.91	1.32
1000.300.0200S	10.00	254	3.00	76	200	3.57	35	3.07	78	6.93	176	1,382	6,147	2.93	1.33
1000.300.0225S	10.00	254	3.00	76	225	4.02	39	3.37	86	6.93	169	1,382	6,639	2.93	1.53
1000.300.0250S	10.00	254	3.00	76	250	4.46	44	3.35	85	6.65	169	1,662	7,393	3.43	1.56

COILOVER (STANDARD) | 3.00" Continued

Part Number	Length		Inside Diameter		Rate			Block Height		Travel		Load at Block Height		Weight	
	inch	mm	inch	mm	lbs/inch	kg/mm	N/mm	inch	mm	inch	mm	lbs	N	lbs	kg
10.00 (length in inches) (Silver)															
1000.300.0300S	10.00	254	3.00	76	300	5.36	53	3.31	84	6.69	170	2,008	8,932	3.57	1.62
1000.300.0350S	10.00	254	3.00	76	350	6.25	61	3.82	97	6.18	157	2,164	9,624	4.39	1.99
1000.300.0400S	10.00	254	3.00	76	400	7.14	70	3.98	101	6.02	153	2,414	10,737	4.76	2.16
1000.300.0450S	10.00	254	3.00	76	450	8.03	79	4.17	106	5.83	148	2,624	11,672	5.22	2.37
1000.300.0500S	10.00	254	3.00	76	500	8.92	88	4.17	106	5.79	147	2,905	12,922	5.36	2.43
12.00 (length in inches) (Silver)															
1200.300.0100S	12.00	305	3.00	76	100	1.78	18	2.87	73	9.13	232	912	4,057	2.34	1.06
1200.300.0125S	12.00	305	3.00	76	125	2.23	22	3.35	85	8.65	220	1,079	4,800	2.98	1.35
1200.300.0150S	12.00	305	3.00	76	150	2.68	26	3.19	81	8.81	224	1,319	5,867	2.89	1.31
1200.300.0175S	12.00	305	3.00	76	175	3.13	31	3.74	95	8.26	210	1,448	6,441	3.66	1.66
1200.300.0200S	12.00	305	3.00	76	200	3.57	35	3.66	93	8.34	212	1,664	7,402	3.70	1.68
1200.300.0225S	12.00	305	3.00	76	225	4.02	39	3.94	100	8.06	205	1,815	8,073	4.17	1.89
1200.300.0250S	12.00	305	3.00	76	250	4.46	44	3.94	100	8.06	205	2,014	8,959	4.28	1.94
1200.300.0275S	12.00	305	3.00	76	275	4.91	48	4.29	109	7.71	196	2,122	9,439	4.87	2.21
1200.300.0300S	12.00	305	3.00	76	300	5.36	53	4.33	110	7.67	195	2,305	10,253	5.03	2.28
1200.300.0325S	12.00	305	3.00	76	325	5.80	57	4.37	111	7.63	194	2,486	11,058	5.16	2.34
1200.300.0350S	12.00	305	3.00	76	350	6.25	61	4.41	112	7.59	193	2,657	11,819	5.36	2.43
1200.300.0375S	12.00	305	3.00	76	375	6.70	66	4.49	114	7.51	191	2,815	12,522	5.58	2.53
1200.300.0400S	12.00	305	3.00	76	400	7.14	70	4.57	116	7.43	189	2,970	13,211	5.80	2.63
1200.300.0450S	12.00	305	3.00	76	450	8.05	79	4.76	121	7.24	184	3,254	14,474	6.28	2.85
1200.300.0500S	12.00	305	3.00	76	500	8.94	88	5.00	127	7.00	178	3,503	15,582	6.86	3.11
1200.300.0600S	12.00	305	3.00	76	600	10.71	105	5.24	133	6.76	172	4,069	18,100	7.61	3.45
1200.300.0650S	12.00	305	3.00	76	650	11.61	114	5.48	139	6.52	166	4,237	18,848	8.38	3.80
1200.300.0700S	12.00	305	3.00	76	700	12.50	123	5.65	144	6.35	161	4,443	19,764	8.82	4.00
14.00 (length in inches) (Silver)															
1400.300.0100S	14.00	356	3.00	76	100	1.78	18	3.66	93	10.35	263	1,035	4,605	3.15	1.43
1400.300.0125S	14.00	356	3.00	76	125	2.23	22	3.98	101	10.02	255	1,254	5,578	3.77	1.71
1400.300.0150S	14.00	356	3.00	76	150	2.68	26	4.25	108	9.75	248	1,464	6,512	4.21	1.91
1400.300.0175S	14.00	356	3.00	76	175	3.13	31	4.45	113	9.55	243	1,673	7,442	4.63	2.10
1400.300.0200S	14.00	356	3.00	76	200	3.57	35	4.72	120	9.28	236	1,855	8,251	5.18	2.35
1400.300.0225S	14.00	356	3.00	76	225	4.02	39	4.65	118	9.35	237	2,103	9,355	5.20	2.36
1400.300.0250S	14.00	356	3.00	76	250	4.46	44	5.00	127	9.00	229	2,251	10,013	5.87	2.66
1400.300.0275S	14.00	356	3.00	76	275	4.91	48	4.96	126	9.04	230	2,484	11,049	5.95	2.70
1400.300.0300S	14.00	356	3.00	76	300	5.36	53	5.39	137	8.61	219	2,581	11,481	6.77	3.07
1400.300.0325S	14.00	356	3.00	76	325	5.80	57	5.24	133	8.76	223	2,843	12,646	6.79	3.08
1400.300.0350S	14.00	356	3.00	76	350	6.25	61	5.47	139	8.53	217	2,990	13,300	7.12	3.23
1400.300.0400S	14.00	356	3.00	76	400	7.14	70	5.59	142	8.41	214	3,362	14,955	7.61	3.45
1400.300.0450S	14.00	356	3.00	76	450	8.05	79	5.83	148	8.17	208	3,682	16,378	8.22	3.73
1400.300.0500S	14.00	356	3.00	76	500	8.94	88	6.02	153	7.98	203	3,979	17,699	8.89	4.03
1400.300.0550S	14.00	356	3.00	76	550	9.84	96	6.38	162	7.62	194	4,200	18,682	9.72	4.41
1400.300.0600S	14.00	356	3.00	76	600	10.71	105	6.26	159	7.74	197	4,638	20,631	9.72	4.41
1400.300.0650S	14.00	356	3.00	76	650	11.61	114	6.61	168	7.39	188	4,813	21,409	10.63	4.82
1400.300.0700S	14.00	356	3.00	76	700	12.50	123	6.57	167	7.43	189	5,198	23,121	10.73	4.87
16.00 (length in inches) (Silver)															
1600.300.0075S	16.00	406	3.00	76	75	1.34	13	3.78	96	12.22	310	916	4,075	3.09	1.40
1600.300.0100S	16.00	406	3.00	76	100	1.78	18	4.45	113	11.55	293	1,155	5,138	4.08	1.85
1600.300.0125S	16.00	406	3.00	76	125	2.23	22	4.49	114	11.51	292	1,439	6,401	4.36	1.98
1600.300.0150S	16.00	406	3.00	76	150	2.68	26	5.08	129	10.92	277	1,638	7,286	5.33	2.42
1600.300.0175S	16.00	406	3.00	76	175	3.13	31	5.31	135	10.69	272	1,869	8,314	5.82	2.64
1600.300.0200S	16.00	406	3.00	76	200	3.57	35	5.55	141	10.45	265	2,090	9,297	6.41	2.91
1600.300.0225S	16.00	406	3.00	76	225	4.02	39	5.47	139	10.53	267	2,368	10,533	6.46	2.93
1600.300.0250S	16.00	406	3.00	76	250	4.46	44	5.83	148	10.17	258	2,546	11,325	7.19	3.26
1600.300.0300S	16.00	406	3.00	76	300	5.36	53	6.22	158	9.78	248	2,931	13,038	8.20	3.72
1600.300.0350S	16.00	406	3.00	76	350	6.25	61	6.46	164	9.54	242	3,342	14,866	8.75	3.97
1600.300.0400S	16.00	406	3.00	76	400	7.14	70	6.61	168	9.39	239	3,754	16,699	9.33	4.23
1600.300.0450S	16.00	406	3.00	76	450	8.05	79	6.81	173	9.19	233	4,130	18,371	10.39	4.71

COILOVER (STANDARD) | 3.00" Continued

Part Number	Length		Inside Diameter		Rate			Block Height		Travel		Load at Block Height		Weight	
	inch	mm	inch	mm	lbs/inch	kg/mm	N/mm	inch	mm	inch	mm	lbs	N	lbs	kg
16.00 (length in inches) (Silver)															
1600.300.0500S	16.00	406	3.00	76	500	8.94	88	7.52	191	8.48	215	4,241	18,865	11.66	5.29
1600.300.0550S	16.00	406	3.00	76	550	9.84	96	7.60	193	8.40	213	4,629	20,591	12.30	5.58
1600.300.0600S	16.00	406	3.00	76	600	10.71	105	7.72	196	8.28	210	4,978	22,143	12.59	5.71
1600.300.0650S	16.00	406	3.00	76	650	11.61	114	7.85	200	8.15	207	5,292	23,547	13.39	6.09
1600.300.0700S	16.00	406	3.00	76	700	12.50	123	8.03	204	7.97	202	5,575	24,799	13.83	6.27
1600.300.0800S	16.00	406	3.00	76	800	14.28	140	8.15	207	7.85	199	6,274	27,908	14.88	6.75
18.00 (length in inches) (Silver)															
1800.300.0100S	18.00	457	3.00	76	100	1.78	18	5.33	136	12.67	322	1,267	5,634	5.29	2.40
1800.300.0150S	18.00	457	3.00	76	150	2.68	26	6.00	152	12.00	305	1,800	8,007	6.61	3.00
1800.300.0200S	18.00	457	3.00	76	200	3.57	35	6.34	161	11.66	296	2,330	10,364	7.81	3.54
1800.300.0250S	18.00	457	3.00	76	250	4.46	44	6.82	173	11.18	284	2,775	12,431	8.80	4.00
1800.300.0300S	18.00	457	3.00	76	300	5.36	53	7.20	183	10.80	274	3,242	14,421	9.92	4.50
1800.300.0350S	18.00	457	3.00	76	350	6.25	61	7.69	195	10.31	262	3,610	16,058	11.22	5.09
1800.300.0400S	18.00	457	3.00	76	400	7.14	70	7.76	197	10.24	260	4,100	18,238	11.75	5.33
1800.300.0450S	18.00	457	3.00	76	450	8.05	79	8.19	208	9.81	249	4,415	19,639	12.77	5.79
1800.300.0500S	18.00	457	3.00	76	500	8.94	88	8.43	214	9.57	243	4,780	21,262	13.63	6.18
1800.300.0550S	18.00	457	3.00	76	550	9.84	96	8.50	216	9.50	241	5,231	23,269	14.33	6.50
1800.300.0600S	18.00	457	3.00	76	600	10.71	105	8.86	225	9.14	232	5,496	24,447	15.44	7.00
1800.300.0650S	18.00	457	3.00	76	650	11.61	114	8.98	228	9.02	229	5,873	26,124	15.77	7.15
1800.300.0700S	18.00	457	3.00	76	700	12.50	123	9.09	231	8.91	226	6,227	27,699	16.69	7.57
1800.300.0800S	18.00	457	3.00	76	800	14.28	140	9.76	248	8.24	209	6,600	29,358	19.69	8.93
Tender/Linear															
0350.300.0050	4.72	120	3.00	76	50	0.89	9	1.22	31	3.50	89	175	778	1.41	0.64
Helper															
HELPER300	2.95	75	3.00	76	46	0.82	8	0.95	24	2.00	51	92	411	0.90	0.41
HELPER300T	4.84	123	3.00	76	23	0.41	4	1.02	26	3.82	97	91	405	0.88	0.40
Spacer (ID locating main to helper/tender coupling spacer)															
SPACER300			3.00	76											
Isolator (Delrin Seat Plate)															
ISOLATOR300			3.00	76											
Torsion Release Bearing															
TRB300			3.00	76											

COILOVER (STANDARD)

3.75" Coilover Springs

– Commonly used on 3" coilover shocks



Part Number	Length		Inside Diameter		Rate			Block Height		Travel		Load at Block Height		Weight	
	inch	mm	inch	mm	lbs/inch	kg/mm	N/mm	inch	mm	inch	mm	lbs	N	lbs	kg
8.00 (length in inches) (Silver)															
0800.375.0100S	8.00	203	3.75	95	100	1.78	18	1.65	42	6.35	161	635	2,826	1.54	0.70
0800.375.0150S	8.00	203	3.75	95	150	2.68	26	1.89	48	6.11	155	910	4,077	1.98	0.90
0800.375.0200S	8.00	203	3.75	95	200	3.57	35	2.12	54	5.88	149	1,175	5,228	2.40	1.09
0800.375.0250S	8.00	203	3.75	95	250	4.46	44	2.54	65	5.46	139	1,364	6,067	2.67	1.21
0800.375.0300S	8.00	203	3.75	95	300	5.36	53	2.40	61	5.59	142	1,676	7,456	3.06	1.40
0800.375.0350S	8.00	203	3.75	95	350	6.25	61	2.49	63	5.51	140	1,929	8,581	3.30	1.50
0800.375.0400S	8.00	203	3.75	95	400	7.14	70	2.76	70	5.24	133	2,079	9,314	3.96	1.80
0800.375.0450S	8.00	203	3.75	95	450	8.03	79	2.92	74	5.08	129	2,285	10,165	4.36	1.98
10.00 (length in inches) (Silver)															
1000.375.0100S	10.00	254	3.75	95	100	1.78	18	2.23	57	7.78	198	777	3,457	2.20	1.00
1000.375.0150S	10.00	254	3.75	95	150	2.68	26	2.46	62	7.55	192	1,124	5,035	2.86	1.30
1000.375.0200S	10.00	254	3.75	95	200	3.57	35	2.66	68	7.34	186	1,468	6,529	3.31	1.50
1000.375.0250S	10.00	254	3.75	95	250	4.46	44	2.95	75	7.05	179	1,762	7,838	3.95	1.79
1000.375.0300S	10.00	254	3.75	95	300	5.36	53	3.19	81	6.81	173	2,043	9,088	4.56	2.07
1000.375.0350S	10.00	254	3.75	95	350	6.25	61	3.27	83	6.73	171	2,356	10,480	4.85	2.20
1000.375.0400S	10.00	254	3.75	95	400	7.14	70	3.39	86	6.61	168	2,645	11,765	5.22	2.37
1000.375.0450S	10.00	254	3.75	95	450	8.05	79	3.50	89	6.50	165	2,923	13,002	5.62	2.55
1000.375.0500S	10.00	254	3.75	95	500	8.94	88	3.66	93	6.34	161	3,169	14,096	6.13	2.78
12.00 (length in inches) (Silver)															
1200.375.0100S	12.00	305	3.75	95	100	1.78	18	2.60	66	9.40	239	940	4,181	2.64	1.20
1200.375.0150S	12.00	305	3.75	95	150	2.68	26	3.04	77	8.97	228	1,335	5,983	3.74	1.70
1200.375.0200S	12.00	305	3.75	95	200	3.57	35	3.38	86	8.62	219	1,725	7,673	4.39	1.99
1200.375.0250S	12.00	305	3.75	95	250	4.46	44	3.56	90	8.44	214	2,111	9,390	4.94	2.24
1200.375.0300S	12.00	305	3.75	95	300	5.36	53	3.84	98	8.16	207	2,447	10,885	5.69	2.58
1200.375.0350S	12.00	305	3.75	95	350	6.25	61	4.17	106	7.83	199	2,741	12,193	6.57	2.98
1200.375.0400S	12.00	305	3.75	95	400	7.14	70	4.28	109	7.72	196	3,087	13,732	7.01	3.18
1200.375.0450S	12.00	305	3.75	95	450	8.03	79	4.45	113	7.52	191	3,391	15,082	7.87	3.57
1200.375.0500S	12.00	305	3.75	95	500	8.94	88	4.57	116	7.43	189	3,716	16,530	8.04	3.65
14.00 (length in inches) (Silver)															
1400.375.0100S	14.00	356	3.75	95	100	1.78	18	3.22	82	10.78	274	1,078	4,796	3.74	1.70
1400.375.0150S	14.00	356	3.75	95	150	2.68	26	3.64	92	10.35	263	1,543	6,914	4.84	2.20
1400.375.0200S	14.00	356	3.75	95	200	3.57	35	3.90	99	10.12	257	2,007	8,993	5.50	2.50
1400.375.0250S	14.00	356	3.75	95	250	4.46	44	4.53	115	9.49	241	2,370	10,542	7.05	3.20
1400.375.0300S	14.00	356	3.75	95	300	5.36	53	4.71	120	9.29	236	2,787	12,397	7.49	3.40
1400.375.0350S	14.00	356	3.75	95	350	6.25	61	5.04	128	8.96	228	3,135	13,945	8.51	3.86
1400.375.0400S	14.00	356	3.75	95	400	7.14	70	5.15	131	8.85	225	3,541	15,751	9.01	4.09
1400.375.0450S	14.00	356	3.75	95	450	8.05	79	5.28	134	8.72	221	3,925	17,459	9.57	4.34
16.00 (length in inches) (Silver)															
1600.375.0200S	16.00	406	3.75	95	200	3.57	35	5.14	131	10.86	276	2,156	9,658	7.92	3.60
1600.375.0250S	16.00	406	3.75	95	250	4.46	44	5.42	138	10.58	269	2,644	11,762	8.88	4.03

COILOVER (STANDARD) | 3.75" Continued

Part Number	Length		Inside Diameter		Rate			Block Height		Travel		Load at Block Height		Weight	
	inch	mm	inch	mm	lbs/inch	kg/mm	N/mm	inch	mm	inch	mm	lbs	N	lbs	kg
16.00 (length in inches) (Silver)															
1600.375.0300S	16.00	406	3.75	95	300	5.36	53	5.80	147	10.20	259	3,060	13,613	10.25	4.65
1600.375.0350S	16.00	406	3.75	95	350	6.25	61	5.98	152	10.02	254	3,505	15,592	10.96	4.97
1600.375.0400S	16.00	406	3.75	95	400	7.14	70	6.26	159	9.74	247	3,893	17,319	12.10	5.49
1600.375.0450S	16.00	406	3.75	95	450	8.03	79	6.30	160	9.69	246	4,357	21,128	12.61	5.72
1600.375.0500S	16.00	406	3.75	95	500	8.92	88	6.50	165	9.49	241	4,750	23,411	13.42	6.09
1600.375.0650S	16.00	406	3.75	95	650	11.61	114	7.14	181	8.86	225	5,756	25,615	16.94	7.70
18.00 (length in inches) (Silver)															
1800.375.0200S	18.00	457	3.75	95	200	3.57	35	5.94	151	12.05	306	2,393	10,721	9.68	4.40
1800.375.0250S	18.00	457	3.75	95	250	4.46	44	6.37	162	11.65	296	2,888	12,939	11.00	5.00
1800.375.0300S	18.00	457	3.75	95	300	5.36	53	6.68	170	11.32	288	3,372	15,107	12.32	5.60
1800.375.0350S	18.00	457	3.75	95	350	6.25	61	6.99	178	11.01	280	3,826	17,140	13.64	6.20
1800.375.0400S	18.00	457	3.75	95	400	7.14	70	7.30	186	10.70	272	4,248	19,030	14.96	6.80
1800.375.0450S	18.00	457	3.75	95	450	8.03	79	7.30	186	10.70	272	4,248	19,030	15.48	7.02
1800.375.0500S	18.00	457	3.75	95	500	8.94	88	7.72	196	10.28	261	5,137	22,859	16.48	7.70
1800.375.0600S	18.00	457	3.75	95	600	10.71	105	8.17	207	9.83	250	5,858	26,246	19.80	9.00
1800.375.0700S	18.00	457	3.75	95	700	12.50	123	8.72	221	9.28	236	6,499	28,909	21.69	9.84
1800.375.0750S	18.00	457	3.75	95	750	13.39	131	9.01	229	8.99	228	6,741	29,985	23.08	10.47
1800.375.0800S	18.00	457	3.75	95	800	14.28	140	8.95	227	9.05	230	7,239	32,201	23.23	10.54
20.00 (length in inches) (Silver)															
2000.375.0200S	20.00	508	3.75	95	200	3.57	35	6.74	171	13.26	337	2,633	11,798	11.44	5.20
2000.375.0250S	20.00	508	3.75	95	250	4.46	44	7.19	183	12.81	325	3,179	14,241	12.98	5.90
2000.375.0300S	20.00	508	3.75	95	300	5.36	53	7.36	187	12.64	321	3,792	16,868	13.62	6.18
2000.375.0350S	20.00	508	3.75	95	350	6.25	61	7.87	200	12.12	308	4,243	18,871	15.84	7.20
2000.375.0400S	20.00	508	3.75	95	400	7.14	70	8.21	209	11.79	299	4,716	20,978	16.84	7.64
2000.375.0450S	20.00	508	3.75	95	450	8.03	79	8.31	211	11.69	297	5,263	23,411	18.21	8.26
2000.375.0500S	20.00	508	3.75	95	500	8.94	88	9.06	230	10.94	278	5,471	24,336	20.98	9.52
2000.375.0600S	20.00	508	3.75	95	600	10.71	105	9.49	241	10.51	267	6,307	28,055	23.32	10.58
2000.375.0650S	20.00	508	3.75	95	650	11.61	114	9.76	248	10.24	260	6,654	29,598	24.68	11.19
2000.375.0700S	20.00	508	3.75	95	700	12.50	123	10.04	255	9.96	253	6,973	31,017	26.12	11.85
22.00 (length in inches) (Silver)															
2200.375.0200S	22.00	559	3.75	95	200	3.57	35	6.97	177	15.01	381	3,006	13,370	12.10	5.50
2200.375.0250S	22.00	559	3.75	95	250	4.46	44	7.43	189	14.57	370	3,642	16,199	13.86	6.30
2200.375.0300S	22.00	559	3.75	95	300	5.36	53	8.31	211	13.69	348	4,107	18,269	16.00	7.26
2200.375.0350S	22.00	559	3.75	95	350	6.25	61	8.74	222	13.26	337	4,643	20,650	18.34	8.32
2200.375.0400S	22.00	559	3.75	95	400	7.14	70	9.16	233	12.84	326	5,135	22,842	19.48	8.84
2200.375.0450S	22.00	559	3.75	95	450	8.05	79	9.49	241	12.52	318	5,637	25,073	22.35	10.14
2200.375.0500S	22.00	559	3.75	95	500	8.94	88	10.07	256	11.93	303	5,964	26,529	24.07	10.92
2200.375.0550S	22.00	559	3.75	95	550	9.84	96	10.41	264	11.59	294	6,373	28,348	26.29	11.93
2200.375.0600S	22.00	559	3.75	95	600	10.71	105	11.00	279	11.00	279	6,601	29,363	28.28	12.83
2200.375.0650S	22.00	559	3.75	95	650	11.61	114	10.39	264	11.57	294	7,478	33,502	27.94	12.70
2200.375.0700S	22.00	559	3.75	95	700	12.50	123	11.09	282	10.91	277	7,638	33,975	29.71	13.48
2200.375.0800S	22.00	559	3.75	95	800	14.28	140	11.82	300	10.18	259	8,136	36,191	33.43	15.16
24.00 (length in inches) (Silver)															
2400.375.0200S	24.00	610	3.75	95	200	3.57	35	8.24	209	15.76	400	3,152	14,020	14.74	6.70
2400.375.0250S	24.00	610	3.75	95	250	4.46	44	8.78	223	15.22	387	2,966	16,936	16.94	7.70
2400.375.0300S	24.00	610	3.75	95	300	5.36	53	9.37	238	14.63	372	4,388	19,519	18.73	8.50
2400.375.0350S	24.00	610	3.75	95	350	6.25	61	9.78	248	14.22	361	4,977	22,139	20.54	9.32
2400.375.0400S	24.00	610	3.75	95	400	7.14	70	10.47	266	13.53	344	5,411	24,069	23.96	10.87
2400.375.0450S	24.00	610	3.75	95	450	8.05	79	11.57	294	12.43	316	5,591	24,870	28.15	12.77
2400.375.0500S	24.00	610	3.75	95	500	8.94	88	11.16	283	12.84	326	6,419	28,553	27.53	12.49
2400.375.0550S	24.00	610	3.75	95	550	9.84	96	11.91	303	12.09	307	6,652	29,589	30.66	13.91
2400.375.0600S	24.00	610	3.75	95	600	10.71	105	12.10	307	11.90	302	7,137	31,747	32.05	14.54
2400.375.0650S	24.00	610	3.75	95	650	11.61	114	12.65	321	11.35	288	7,380	32,828	34.12	15.48
2400.375.0700S	24.00	610	3.75	95	700	12.50	123	12.58	320	11.42	290	7,995	35,563	35.15	15.94
2400.375.0750S	24.00	610	3.75	95	750	13.42	131	13.43	341	10.57	269	7,934	35,308	39.16	18.30
2400.375.0800S	24.00	610	3.75	95	800	14.28	140	12.59	320	11.41	290	9,131	40,615	35.81	16.24



PLATINUM MODIFIED Front Springs

- Legendary quality, maximum travel, rate linearity and block resistance while withstanding the punishment of on-track conditions
- Ultra light weight for increased vehicle response
- Each platinum spring is wound to exact tolerances and dyno tested with graph results included



Part Number	Length		Outside Diameter		Rate			Block Height		Travel		Load at Block Height		Weight	
	inch	mm	inch	mm	lbs/inch	kg/mm	N/mm	inch	mm	inch	mm	lbs	N	lbs	kg
Platinum Front Short Track															
PF0950.500.0350	9.50	241	5.00	127	350	6.26	61	2.80	71	6.69	170	2,338	10,404	3.85	1.80
PF0950.500.0400	9.50	241	5.00	127	400	7.14	70	2.92	74	6.58	167	2,631	11,703	0.86	1.90
PF0950.500.0450	9.50	241	5.00	127	450	8.05	79	3.37	86	6.13	156	2,759	12,273	1.05	2.30
PF0950.500.0500	9.50	241	5.00	127	500	8.94	88	3.15	80	6.38	162	3,180	14,144	4.87	2.21
PF0950.500.0550	9.50	241	5.00	127	550	9.84	96	3.27	83	6.26	159	3,438	15,292	4.95	2.25
PF0950.500.0600	9.50	241	5.00	127	600	10.71	105	3.58	91	5.91	150	3,539	15,743	5.24	2.38
PF0950.500.0650	9.50	241	5.00	127	650	11.61	114	3.54	90	5.94	151	3,864	17,187	5.08	2.30

CONVENTIONAL Front Springs

- High linearity and guaranteed rate consistency
- Low side loads with load center ideally located relative to spring axis
- Exceptional block resistance and durability



Part Number	Length		Outside Diameter		Rate			Block Height		Travel		Load at Block Height		Weight	
	inch	mm	inch	mm	lbs/inch	kg/mm	N/mm	inch	mm	inch	mm	lbs	N	lbs	kg
9.50 (length in inches) - 5.00" O.D.															
0950.500.0200	9.50	241	5.00	127	200	3.57	35	2.54	65	6.96	177	1,391	6,187	3.17	1.44
0950.500.0250	9.50	241	5.00	127	250	4.46	44	2.58	66	6.92	176	1,730	7,695	3.33	1.51
0950.500.0300	9.50	241	5.00	127	300	5.36	53	2.87	73	6.63	168	1,990	8,852	3.92	1.78
0950.500.0350	9.50	241	5.00	127	350	6.25	61	2.92	74	6.58	167	2,302	10,240	4.32	1.96
0950.500.0400	9.50	241	5.00	127	400	7.14	70	3.09	78	6.41	163	2,565	11,410	4.72	2.14
0950.500.0425	9.50	241	5.00	127	400	7.14	70	3.20	81	6.30	160	2,678	11,913	4.98	2.26
0950.500.0450	9.50	241	5.00	127	450	8.05	79	3.54	90	5.96	151	2,682	11,930	5.42	2.46
0950.500.0475	9.50	241	5.00	127	475	8.50	83	3.37	86	6.13	156	2,912	12,954	5.42	2.46
0950.500.0500	9.50	241	5.00	127	500	8.94	88	3.78	96	5.72	145	2,861	12,726	5.99	2.72
0950.500.0525	9.50	241	5.00	127	525	9.39	92	3.37	86	6.13	156	3,220	14,323	5.49	2.49
0950.500.0550	9.50	241	5.00	127	550	9.84	96	3.37	86	6.13	156	3,373	15,004	5.25	2.38
0950.500.0575	9.50	241	5.00	127	575	10.28	101	3.60	91	5.90	150	3,392	15,087	6.04	2.74
0950.500.0600	9.50	241	5.00	127	600	10.71	105	3.60	91	5.90	150	3,541	15,751	5.80	2.63
0950.500.0650	9.50	241	5.00	127	650	11.61	114	3.66	93	5.84	148	3,797	16,890	5.97	2.71
0950.500.0700	9.50	241	5.00	127	700	12.50	123	3.93	100	5.57	141	3,895	17,326	6.63	3.01
0950.500.0750	9.50	241	5.00	127	750	13.39	131	3.99	101	5.51	140	4,128	18,362	6.83	3.10
0950.500.0800	9.50	241	5.00	127	800	14.28	140	4.06	103	5.44	138	4,355	19,372	7.03	3.19

CONVENTIONAL | Front Springs Continued

Part Number	Length		Outside Diameter		Rate			Block Height		Travel		Load at Block Height		Weight	
	inch	mm	inch	mm	lbs/inch	kg/mm	N/mm	inch	mm	inch	mm	lbs	N	lbs	kg
9.50 (length in inches) - 5.00" O.D.															
0950.500.0850	9.50	241	5.00	127	850	15.17	149	4.35	110	5.15	131	4,377	19,470	7.69	3.49
0950.500.0900	9.50	241	5.00	127	900	16.07	158	4.21	107	5.29	134	4,760	21,173	7.49	3.40
0950.500.0950	9.50	241	5.00	127	950	16.96	166	4.55	116	4.95	126	4,704	20,924	8.24	3.74
0950.500.1000	9.50	241	5.00	127	1,000	17.85	175	4.65	118	4.85	123	4,852	21,583	8.55	3.88
0950.500.1100	9.50	241	5.00	127	1,100	19.64	193	4.61	117	4.89	124	5,382	23,940	8.55	3.88
9.50 (length in inches) - 5.50" O.D.															
0950.550.0300	9.50	241	5.50	140	300	5.36	53	2.60	66	6.90	175	2,068	9,201	4.23	1.92
0950.550.0350	9.50	241	5.50	140	350	6.25	61	3.08	78	6.42	163	2,247	9,995	5.40	2.45
0950.550.0400	9.50	241	5.50	140	400	7.14	70	3.37	86	6.13	156	2,452	10,907	5.44	2.47
0950.550.0450	9.50	241	5.50	140	450	8.05	79	3.10	79	6.40	163	2,880	12,811	5.31	2.41
0950.550.0500	9.50	241	5.50	140	500	8.94	88	3.26	83	6.24	158	3,117	13,865	5.77	2.62
0950.550.0525	9.50	241	5.50	140	525	9.39	92	3.29	83	6.21	158	3,262	14,509	6.17	2.80
0950.550.0550	9.50	241	5.50	140	550	9.84	96	3.53	90	5.97	152	3,281	14,595	6.41	2.91
0950.550.0600	9.50	241	5.50	140	600	10.71	105	3.71	94	5.79	147	3,473	15,449	6.92	3.14
0950.550.0625	9.50	241	5.50	140	625	11.16	109	3.83	97	5.67	144	3,542	15,754	7.27	3.30
0950.550.0650	9.50	241	5.50	140	650	11.61	114	3.77	96	5.73	146	3,726	16,574	7.12	3.23
0950.550.0700	9.50	241	5.50	140	700	12.50	123	3.88	99	5.62	143	3,932	17,490	7.54	3.42
0950.550.0750	9.50	241	5.50	140	750	13.39	131	4.07	103	5.43	138	4,068	18,095	8.04	3.65
0950.550.0800	9.50	241	5.50	140	800	14.28	140	4.13	105	5.37	136	4,292	19,092	8.27	3.75
0950.550.0850	9.50	241	5.50	140	850	15.17	149	4.19	106	5.31	135	4,511	20,066	8.49	3.85
0950.550.0900	9.50	241	5.50	140	900	16.07	158	4.37	111	5.13	130	4,616	20,533	9.54	4.33
0950.550.0950	9.50	241	5.50	140	950	16.96	166	4.52	115	4.98	126	4,734	21,058	9.52	4.32
0950.550.1000	9.50	241	5.50	140	1,000	17.85	175	4.53	115	4.97	126	4,974	22,125	9.90	4.49
0950.550.1050	9.50	241	5.50	140	1,050	18.75	184	4.84	123	4.66	118	4,896	21,778	10.87	4.93
0950.550.1100	9.50	241	5.50	140	1,100	19.64	193	4.15	105	5.35	136	5,889	26,195	9.94	4.51
0950.550.1150	9.50	241	5.50	140	1,150	20.53	201	4.57	116	4.93	125	5,671	25,226	10.20	4.63
0950.550.1200	9.50	241	5.50	140	1,200	21.42	210	4.92	125	4.58	116	5,494	24,438	11.28	5.12
0950.550.1250	9.50	241	5.50	140	1,250	22.32	219	4.76	121	4.74	120	5,920	26,333	10.89	4.94
0950.550.1300	9.50	241	5.50	140	1,300	23.22	228	5.17	131	4.33	110	5,634	25,061	12.12	5.50
10.50 (length in inches) - 5.50" O.D.															
1050.550.0300	10.50	267	5.50	140	300	5.36	53	2.89	74	7.61	193	2,273	10,112	4.70	2.13
1050.550.0325	10.50	267	5.50	140	325	5.80	57	2.95	75	7.55	192	2,446	10,881	4.85	2.20
1050.550.0350	10.50	267	5.50	140	350	6.25	61	3.00	76	7.50	191	2,617	11,640	5.03	2.28
1050.550.0375	10.50	267	5.50	140	375	6.70	66	3.10	79	7.40	188	2,764	12,297	5.36	2.43
1050.550.0400	10.50	267	5.50	140	400	7.14	70	3.15	80	7.35	187	2,928	13,025	5.53	2.51



STOCK CAR Front Springs (Dirt Circle Track Stock Cars)

Part Number	Length		Outside Diameter		Rate			Block Height		Travel		Load at Block Height		Weight	
	inch	mm	inch	mm	lbs/inch	kg/mm	N/mm	inch	mm	inch	mm	lbs	N	lbs	kg
11.00 (length in inches) - 5.50" O.D.															
1100.550.0850	11.00	279	5.50	140	850	15.17	149	4.96	126	6.02	153	5,138	22,862	10.27	4.80
1100.550.0900	11.00	279	5.50	140	900	16.07	158	5.27	134	5.73	145	5,154	22,926	11.60	5.25
1100.550.0950	11.00	279	5.50	140	950	16.96	166	5.51	140	5.47	139	5,196	23,123	12.20	5.70
1100.550.1000	11.00	279	5.50	140	1,000	17.85	175	5.45	138	5.55	141	5,549	24,685	12.27	5.55
1100.550.1050	11.00	279	5.50	140	1,050	18.75	184	5.67	144	5.31	135	5,594	24,895	12.84	6.00
1100.550.1100	11.00	279	5.50	140	1,100	19.64	193	5.51	140	5.49	139	6,037	26,854	13.04	5.90
1100.550.1150	11.00	279	5.50	140	1,150	20.53	201	5.75	146	5.24	133	6,046	26,903	13.05	6.10
1100.550.1200	11.00	279	5.50	140	1,200	21.42	210	5.73	146	5.27	134	6,324	28,129	13.68	6.19
1100.550.1300	11.00	279	5.50	140	1,300	23.22	228	5.95	151	5.05	128	6,562	29,187	14.52	6.57

PLATINUM Rear Springs

- Legendary quality, maximum travel, rate linearity and block resistance while withstanding the punishment of on-track conditions
- Ultra light weight for increased vehicle response
- Each platinum spring is wound to exact tolerances and dyno tested with graph results included



Part Number	Length		Outside Diameter		Rate			Block Height		Travel		Load at Block Height		Weight	
	inch	mm	inch	mm	lbs/inch	kg/mm	N/mm	inch	mm	inch	mm	lbs	N	lbs	kg
13.00 (length in inches) - 5.00" O.D.															
PR1300.500.0075	13.00	330	5.00	127	75	1.34	13	2.52	64	10.48	266	786	3,495	2.87	1.30
PR1300.500.0100	13.00	330	5.00	127	100	1.78	18	2.52	64	10.48	266	1,048	4,660	3.09	1.40
PR1300.500.0125	13.00	330	5.00	127	125	2.23	22	2.83	72	10.17	258	1,271	5,652	3.75	1.70
PR1300.500.0150	13.00	330	5.00	127	150	2.68	26	3.12	79	9.88	251	1,482	6,594	4.19	1.90
PR1300.500.0175	13.00	330	5.00	127	175	3.13	31	3.13	80	9.87	251	1,726	7,677	4.41	2.00
PR1300.500.0200	13.00	330	5.00	127	200	3.57	35	3.36	85	9.64	245	1,927	8,572	4.85	2.20
PR1300.500.0225	13.00	330	5.00	127	225	4.02	39	3.55	90	9.45	240	2,127	9,460	5.29	2.40
PR1300.500.0250	13.00	330	5.00	127	250	4.46	44	3.61	92	9.39	238	2,346	10,437	5.51	2.50
16.00 (length in inches) - 5.00" O.D.															
PR1600.500.0050	16.00	406	5.00	127	50	0.89	9	2.77	70	13.23	336	662	2,944	3.09	1.40
PR1600.500.0075	16.00	406	5.00	127	75	1.34	13	2.47	63	13.53	344	1,015	4,515	3.13	1.42
PR1600.500.0100	16.00	406	5.00	127	100	1.78	18	2.92	74	13.08	332	1,308	5,818	3.90	1.77
PR1600.500.0125	16.00	406	5.00	127	125	2.23	22	3.07	78	12.93	328	1,616	7,188	4.60	2.09
PR1600.500.0150	16.00	406	5.00	127	150	2.68	26	3.55	90	12.45	316	1,868	8,309	5.10	2.31
PR1600.500.0175	16.00	406	5.00	127	175	3.13	31	3.78	96	12.19	310	2,132	9,483	5.87	2.66
PR1600.500.0200	16.00	406	5.00	127	200	3.57	35	4.06	103	11.89	302	2,379	10,581	6.50	2.96
18.00 (length in inches) - 5.00" O.D.															
PR1800.500.0050	18.00	457	5.00	127	50	0.89	9	3.00	76	15.01	381	751	3,339	3.53	1.60
PR1800.500.0075	18.00	457	5.00	127	75	1.34	13	3.30	84	14.70	373	1,102	4,902	4.19	1.90
PR1800.500.0100	18.00	457	5.00	127	100	1.78	18	3.53	90	14.47	368	1,447	6,435	4.63	2.10
PR1800.500.0125	18.00	457	5.00	127	125	2.23	22	4.10	104	13.90	353	1,738	7,729	5.73	2.60

CONVENTIONAL Rear Springs



Part Number	Length		Outside Diameter		Rate			Block Height		Travel		Load at Block Height		Weight	
	inch	mm	inch	mm	lbs/inch	kg/mm	N/mm	inch	mm	inch	mm	lbs	N	lbs	kg
11.00 (length in inches) - 5.00" O.D.															
1100.500.0125	11.00	279	5.00	127	125	2.23	22	2.41	61	8.59	218	1,073	4,773	2.93	1.33
1100.500.0150	11.00	279	5.00	127	150	2.68	26	2.55	65	8.45	215	1,268	5,640	3.22	1.46
1100.500.0175	11.00	279	5.00	127	175	3.13	31	2.73	69	8.27	210	1,447	6,437	3.59	1.63
1100.500.0200	11.00	279	5.00	127	200	3.57	35	2.89	73	8.11	206	1,621	7,211	3.97	1.80
1100.500.0225	11.00	279	5.00	127	225	4.02	39	3.16	80	7.84	199	1,763	7,842	4.52	2.05
1100.500.0250	11.00	279	5.00	127	250	4.46	44	3.17	81	7.83	199	1,957	8,705	4.61	2.09
1100.500.0275	11.00	279	5.00	127	275	4.91	48	3.18	81	7.82	199	2,150	9,564	4.67	2.12
1100.500.0300	11.00	279	5.00	127	300	5.36	53	3.80	97	7.20	183	2,159	9,604	5.93	2.69
1100.500.0350	11.00	279	5.00	127	350	6.25	61	3.65	93	7.35	187	2,574	11,450	5.75	2.61
1100.500.0400	11.00	279	5.00	127	400	7.14	70	3.83	97	7.17	182	2,867	12,753	6.22	2.82
1100.500.0450	11.00	279	5.00	127	450	8.05	79	3.78	96	7.22	183	3,249	14,452	6.22	2.82
1100.500.0500	11.00	279	5.00	127	500	8.94	88	4.03	102	6.97	177	3,486	15,506	6.83	3.10
1100.500.0550	11.00	279	5.00	127	550	9.84	96	4.29	109	6.71	170	3,690	16,414	7.49	3.40
1100.500.0600	11.00	279	5.00	127	600	10.71	105	4.55	116	6.45	164	3,871	17,219	8.20	3.72
1100.500.0650	11.00	279	5.00	127	650	11.61	114	4.69	119	6.31	160	4,104	18,255	9.06	4.11
1100.500.0700	11.00	279	5.00	127	700	12.50	123	4.69	119	6.31	160	4,420	19,661	8.66	3.93
1100.500.0750	11.00	279	5.00	127	750	13.39	131	4.69	119	6.31	160	4,736	21,067	8.75	3.97
13.00 (length in inches) - 5.00" O.D.															
1300.500.0125	13.00	330	5.00	127	125	2.23	22	2.90	74	10.10	257	1,262	5,614	3.70	1.68
1300.500.0150	13.00	330	5.00	127	150	2.68	26	3.05	77	9.95	253	1,492	6,637	4.06	1.84
1300.500.0175	13.00	330	5.00	127	175	3.13	31	3.49	89	9.51	242	1,663	7,397	4.96	2.25
1300.500.0200	13.00	330	5.00	127	200	3.57	35	3.46	88	9.54	242	1,907	8,483	4.98	2.26
1300.500.0225	13.00	330	5.00	127	225	4.02	39	3.70	94	9.30	236	2,092	9,306	5.53	2.51
1300.500.0250	13.00	330	5.00	127	250	4.46	44	4.01	102	8.99	228	2,248	10,000	6.19	2.81
1300.500.0275	13.00	330	5.00	127	275	4.91	48	4.38	111	8.62	219	2,371	10,547	7.01	3.18
1300.500.0300	13.00	330	5.00	127	300	5.36	53	4.10	104	8.90	226	2,671	11,881	6.52	2.96
1300.500.0325	13.00	330	5.00	127	325	5.80	57	4.17	106	8.83	224	2,869	12,762	6.74	3.06
1300.500.0350	13.00	330	5.00	127	350	6.25	61	4.24	108	8.76	223	3,066	13,638	6.96	3.16
1300.500.0375	13.00	330	5.00	127	375	6.70	66	4.31	109	8.69	221	3,258	14,492	7.19	3.26
1300.500.0400	13.00	330	5.00	127	400	7.14	70	4.41	112	8.59	218	3,434	15,275	7.47	3.39
1300.500.0450	13.00	330	5.00	127	450	8.05	79	4.65	118	8.35	212	3,757	16,712	8.09	3.67
1300.500.0500	13.00	330	5.00	127	500	8.94	88	4.93	125	8.07	205	4,036	17,953	8.84	4.01
1300.500.0550	13.00	330	5.00	127	550	9.84	96	5.28	134	7.72	196	4,248	18,896	9.72	4.41
1300.500.0600	13.00	330	5.00	127	600	10.71	105	5.57	141	7.43	189	4,458	19,830	10.56	4.79
1300.500.0700	13.00	330	5.00	127	700	12.50	123	5.59	142	7.41	188	5,186	23,068	10.82	4.91
15.00 (length in inches) - 5.00" O.D.															
1500.500.0125	15.00	381	5.00	127	125	2.23	22	4.10	104	10.90	277	1,363	6,063	5.82	2.64
1500.500.0150	15.00	381	5.00	127	150	2.68	26	3.86	98	11.14	283	1,670	7,428	5.58	2.53
1500.500.0175	15.00	381	5.00	127	175	3.13	31	4.09	104	10.91	277	1,908	8,487	6.13	2.78
1500.500.0200	15.00	381	5.00	127	200	3.57	35	4.36	111	10.64	270	2,128	9,466	6.74	3.06
1500.500.0225	15.00	381	5.00	127	225	4.02	39	4.63	118	10.37	263	2,333	10,378	7.41	3.36
1500.500.0250	15.00	381	5.00	127	250	4.46	44	4.63	118	10.37	263	2,593	11,534	7.52	3.41
1500.500.0275	15.00	381	5.00	127	275	4.91	48	4.65	118	10.35	263	2,846	12,660	7.67	3.48
1500.500.0300	15.00	381	5.00	127	300	5.36	53	5.02	128	9.98	253	2,994	13,318	8.53	3.87
16.00 (length in inches) - 5.00" O.D.															
1600.500.0100	16.00	406	5.00	127	100	1.78	18	3.34	85	12.66	322	1,265	5,627	4.36	1.98
1600.500.0125	16.00	406	5.00	127	125	2.23	22	3.80	97	12.20	310	1,525	6,784	5.25	2.38
1600.500.0150	16.00	406	5.00	127	150	2.68	26	3.94	100	12.06	306	1,810	8,051	5.62	2.55

CONVENTIONAL | Rear Springs Continued

Part Number	Length		Outside Diameter		Rate			Block Height		Travel		Load at Block Height		Weight	
	inch	mm	inch	mm	lbs/inch	kg/mm	N/mm	inch	mm	inch	mm	lbs	N	lbs	kg
16.00 (length in inches) - 5.00" O.D.															
1600.500.0175	16.00	406	5.00	127	175	3.13	31	4.17	106	11.83	300	2,070	9,208	6.19	2.81
1600.500.0200	16.00	406	5.00	127	200	3.57	35	4.79	122	11.21	285	2,241	9,968	7.52	3.41
1600.500.0225	16.00	406	5.00	127	225	4.02	39	4.74	120	11.26	286	2,533	11,267	7.54	3.42
1600.500.0250	16.00	406	5.00	127	250	4.46	44	5.11	130	10.89	277	2,723	12,112	8.40	3.81
20.00 (length in inches) - 5.00" O.D.															
2000.500.0075	20.00	508	5.00	127	75	1.34	13	4.25	108	15.75	400	1,180	5,252	5.56	2.60
2000.500.0100	20.00	508	5.00	127	100	1.78	18	4.32	110	15.68	398	1,568	6,975	6.48	2.94
2000.500.0125	20.00	508	5.00	127	125	2.23	22	4.71	120	15.29	388	1,911	8,502	7.47	3.39
2000.500.0150	20.00	508	5.00	127	150	2.68	26	5.22	133	14.78	375	2,216	9,859	8.75	3.97
2000.500.0175	20.00	508	5.00	127	175	3.13	31	5.41	138	14.58	370	2,553	11,356	9.35	4.24

6TH COIL SPRING 5.00" O.D.



Part Number	Length		Outside Diameter		Rate			Block Height		Travel		Load at Block Height		Weight	
	inch	mm	inch	mm	lbs/inch	kg/mm	N/mm	inch	mm	inch	mm	lbs	N	lbs	kg
6th Coil Spring - 5.00" O.D.															
0400.500.0400	4.00	102	5.00	127	400	7.14	70	1.46	37	2.54	65	1,017	4,525	1.65	0.75
0400.500.0450	4.00	102	5.00	127	450	8.05	79	1.42	36	2.58	66	1,162	5,169	1.70	0.77
0400.500.0500	4.00	102	5.00	127	500	8.94	88	1.50	38	2.50	64	1,252	5,568	1.76	0.80

PULL BAR SPRING 5.00" O.D.



Part Number	Length		Outside Diameter		Rate			Block Height		Travel		Load at Block Height		Weight	
	inch	mm	inch	mm	lbs/inch	kg/mm	N/mm	inch	mm	inch	mm	lbs	N	lbs	kg
Pull Bar Spring - 5.00" O.D.															
0675.500.1000	6.75	171	5.00	127	500 / 1000	8.94 / 17.85	88 / 175	3.66	93	3.09	78	2,711	12,059	6.15	2.79
0675.500.1200	6.75	171	5.00	127	600 / 1200	10.7 / 21.5	105 / 210	3.50	89	3.25	82	3,895	17,324	5.88	2.67
0675.500.1500	6.75	171	5.00	127	750 / 1500	13.4 / 26.3	131 / 263	3.30	84	3.45	88	3,196	14,216	6.61	3.00
0675.500.2000	6.75	171	5.00	127	600 / 2000	10.7 / 35.8	105 / 350	3.98	101	2.77	70	5,547	24,675	6.96	3.16

AT WORK

Eibach®



ADAC
DEUTS

COILOVER (METRIC)

60mm, 65mm, 75mm I.D.

- Block and sag resistant
- Smallest block height and precise plane parallelism of spring ends
- Precision tolerances, the tightest in the industry
- High quality corrosion protection by phosphating and epoxy coating



Part Number	Length		Inside Diameter		Rate			Block Height		Travel		Load at Block Height		Weight	
	inch	mm	inch	mm	lbs/inch	kg/mm	N/mm	inch	mm	inch	mm	lbs	N	lbs	kg
80 (length in mm)															
80-60-0100	3.15	80	2.36	60	571	10.21	100	1.15	29	2.00	51	1,143	5,086	0.77	0.35
80-60-0120	3.15	80	2.36	60	685	12.23	120	1.21	31	1.94	49	1,330	5,915	0.86	0.39
80-60-0140	3.15	80	2.36	60	800	14.28	140	1.29	33	1.86	47	1,486	6,608	0.97	0.44
80-60-0160	3.15	80	2.36	60	913	16.33	160	1.28	33	1.87	47	1,707	7,592	0.99	0.45
80-60-0180	3.15	80	2.36	60	1,027	18.34	180	1.39	35	1.76	45	1,813	8,064	1.13	0.51
80-60-0200	3.15	80	2.36	60	1,142	20.39	200	1.49	38	1.66	42	1,891	8,410	1.28	0.58
80-60-0220	3.15	80	2.36	60	1,256	22.47	220	1.40	36	1.75	44	2,193	9,757	1.20	0.54
80-60-0240	3.15	80	2.36	60	1,370	24.46	240	1.43	36	1.72	44	2,351	10,458	1.26	0.57
80-60-0260	3.15	80	2.36	60	1,484	26.50	260	1.46	37	1.69	43	2,502	11,128	1.32	0.60
80-60-0280	3.15	80	2.36	60	1,600	28.57	280	1.47	37	1.68	43	2,684	11,939	1.35	0.61
80-60-0300	3.15	80	2.36	60	1,712	30.63	300	1.53	39	1.62	41	2,782	12,375	1.44	0.65
100 (length in mm)															
100-60-0070	3.94	100	2.36	60	400	7.14	70	1.33	34	2.61	66	1,043	4,638	0.87	0.39
100-60-0080	3.94	100	2.36	60	457	8.18	80	1.33	34	2.61	66	1,191	5,299	0.89	0.41
100-60-0090	3.94	100	2.36	60	514	9.19	90	1.35	34	2.59	66	1,331	5,922	0.93	0.42
100-60-0100	3.94	100	2.36	60	571	10.21	100	1.50	38	2.44	62	1,394	6,200	1.10	0.50
100-60-0110	3.94	100	2.36	60	628	11.21	110	1.51	38	2.42	62	1,522	6,772	1.15	0.52
100-60-0120	3.94	100	2.36	60	685	12.23	120	1.55	39	2.39	61	1,635	7,275	1.21	0.55
100-60-0140	3.94	100	2.36	60	800	14.28	140	1.65	42	2.29	58	1,832	8,148	1.35	0.61
100-60-0160	3.94	100	2.36	60	913	16.33	160	1.62	41	2.32	59	2,120	9,430	1.36	0.62
100-60-0180	3.94	100	2.36	60	1,027	18.34	180	1.73	44	2.20	56	2,264	10,069	1.54	0.70
100-60-0200	3.94	100	2.36	60	1,142	20.39	200	1.72	44	2.21	56	2,527	11,240	1.56	0.71
100-60-0220	3.94	100	2.36	60	1,256	22.47	220	1.87	48	2.07	53	2,597	11,550	1.78	0.81
100-60-0240	3.94	100	2.36	60	1,370	24.46	240	1.88	48	2.05	52	2,816	12,525	1.84	0.83
100-60-0260	3.94	100	2.36	60	1,484	26.50	260	1.89	48	2.04	52	3,034	13,494	1.89	0.86
100-60-0280	3.94	100	2.36	60	1,600	28.57	280	1.93	49	2.01	51	3,209	14,273	1.97	0.89
100-60-0300	3.94	100	2.36	60	1,712	30.63	300	1.97	50	1.97	50	3,376	15,015	2.05	0.93
100-60-0320	3.94	100	2.36	60	1,827	32.62	320	2.00	51	1.93	49	3,534	15,720	2.13	0.97
100-60-0340	3.94	100	2.36	60	1,941	34.72	340	2.04	52	1.90	48	3,684	16,388	2.22	1.01
100-60-0360	3.94	100	2.36	60	2,055	36.76	360	2.08	53	1.86	47	3,826	17,019	2.31	1.05
100-60-0380	3.94	100	2.36	60	2,169	38.80	380	2.11	54	1.82	46	3,960	17,613	2.40	1.09
100-60-0400	3.94	100	2.36	60	2,283	40.84	400	2.06	52	1.88	48	4,298	19,120	2.33	1.06
100-60-0450	3.94	100	2.36	60	2,569	45.96	450	2.22	56	1.72	44	4,408	19,609	2.68	1.21
100-60-0500	3.94	100	2.36	60	2,854	51.06	500	2.20	56	1.74	44	4,968	22,100	2.69	1.22
100-60-0550	3.94	100	2.36	60	3,139	56.15	550	2.27	58	1.67	42	5,243	23,320	2.89	1.31
100-60-0600	3.94	100	2.36	60	3,425	61.27	600	2.27	58	1.67	42	5,707	25,388	2.95	1.34

COILOVER (METRIC) | 60mm I.D. Continued

Part Number	Length		Inside Diameter		Rate			Block Height		Travel		Load at Block Height		Weight	
	inch	mm	inch	mm	lbs/inch	kg/mm	N/mm	inch	mm	inch	mm	lbs	N	lbs	kg
100 (length in mm)															
100-60-0650	3.94	100	2.36	60	3,710	66.37	650	2.37	60	1.56	40	5,801	25,805	3.20	1.45
100-60-0700	3.94	100	2.36	60	4,000	71.40	700	2.38	60	1.56	40	6,240	27,755	3.26	1.48
100-60-0750	3.94	100	2.36	60	4,281	76.58	750	2.38	60	1.56	40	6,681	29,719	3.31	1.50
100-60-0800	3.94	100	2.36	60	4,566	81.68	800	2.48	63	1.46	37	6,652	29,590	3.58	1.63
120 (length in mm)															
120-60-0040	4.72	120	2.36	60	228	4.08	40	1.29	33	3.43	87	784	3,488	0.74	0.34
120-60-0050	4.72	120	2.36	60	285	5.10	50	1.37	35	3.35	85	957	4,258	0.85	0.38
120-60-0060	4.72	120	2.36	60	342	6.12	60	1.47	37	3.25	83	1,115	4,959	0.97	0.44
120-60-0070	4.72	120	2.36	60	400	7.14	70	1.61	41	3.12	79	1,246	5,541	1.13	0.51
120-60-0080	4.72	120	2.36	60	457	8.18	80	1.59	40	3.13	80	1,430	6,363	1.15	0.52
120-60-0090	4.72	120	2.36	60	514	9.19	90	1.76	45	2.97	75	1,526	6,787	1.34	0.61
120-60-0100	4.72	120	2.36	60	571	10.21	100	1.78	45	2.95	75	1,683	7,485	1.39	0.63
120-60-0110	4.72	120	2.36	60	628	11.21	110	1.80	46	2.93	74	1,838	8,174	1.45	0.66
120-60-0120	4.72	120	2.36	60	685	12.23	120	1.84	47	2.88	73	1,976	8,790	1.52	0.69
120-60-0140	4.72	120	2.36	60	800	14.28	140	1.92	49	2.80	71	2,239	9,958	1.68	0.76
120-60-0160	4.72	120	2.36	60	913	16.33	160	2.03	52	2.69	68	2,460	10,944	1.86	0.84
120-60-0180	4.72	120	2.36	60	1,027	18.34	180	2.17	55	2.56	65	2,630	11,700	2.08	0.94
120-60-0200	4.72	120	2.36	60	1,142	20.39	200	2.16	55	2.57	65	2,930	13,035	2.12	0.96
120-60-0220	4.72	120	2.36	60	1,256	22.47	220	2.30	58	2.43	62	3,052	13,574	2.36	1.07
120-60-0240	4.72	120	2.36	60	1,370	24.46	240	2.31	59	2.41	61	3,306	14,706	2.43	1.10
120-60-0260	4.72	120	2.36	60	1,484	26.50	260	2.30	58	2.42	62	3,598	16,006	2.47	1.12
120-60-0280	4.72	120	2.36	60	1,600	28.57	280	2.34	60	2.38	61	3,808	16,940	2.57	1.16
120-60-0300	4.72	120	2.36	60	1,712	30.63	300	2.36	60	2.37	60	4,057	18,045	2.64	1.20
120-60-0320	4.72	120	2.36	60	1,827	32.62	320	2.40	61	2.33	59	4,252	18,912	2.74	1.24
120-60-0340	4.72	120	2.36	60	1,941	34.72	340	2.44	62	2.29	58	4,437	19,737	2.84	1.29
120-60-0360	4.72	120	2.36	60	2,055	36.76	360	2.48	63	2.24	57	4,613	20,520	2.95	1.34
140 (length in mm)															
140-60-0050	5.51	140	2.36	60	285	5.10	50	1.70	43	3.81	97	1,088	4,840	1.13	0.51
140-60-0060	5.51	140	2.36	60	342	6.12	60	1.81	46	3.70	94	1,267	5,636	1.28	0.58
140-60-0070	5.51	140	2.36	60	400	7.14	70	1.77	45	3.75	95	1,497	6,661	1.28	0.58
140-60-0080	5.51	140	2.36	60	457	8.18	80	1.92	49	3.59	91	1,642	7,305	1.47	0.67
140-60-0090	5.51	140	2.36	60	514	9.19	90	2.09	53	3.42	87	1,756	7,811	1.70	0.77
140-60-0100	5.51	140	2.36	60	571	10.21	100	2.12	54	3.39	86	1,936	8,610	1.77	0.80
140-60-0110	5.51	140	2.36	60	628	11.21	110	2.13	54	3.39	86	2,127	9,460	1.81	0.82
140-60-0120	5.51	140	2.36	60	685	12.23	120	2.17	55	3.34	85	2,288	10,176	1.90	0.86
140-60-0130	5.51	140	2.36	60	742	13.27	130	2.20	56	3.31	84	2,460	10,944	1.97	0.89
140-60-0140	5.51	140	2.36	60	800	14.28	140	2.24	57	3.27	83	2,612	11,620	2.06	0.94
140-60-0150	5.51	140	2.36	60	856	15.31	150	2.31	59	3.20	81	2,738	12,180	2.18	0.99
140-60-0160	5.51	140	2.36	60	913	16.33	160	2.36	60	3.15	80	2,878	12,800	2.28	1.03
140-60-0170	5.51	140	2.36	60	970	17.35	170	2.43	62	3.08	78	2,987	13,288	2.40	1.09
140-60-0180	5.51	140	2.36	60	1,027	18.34	180	2.51	64	3.00	76	3,088	13,734	2.54	1.15
140-60-0190	5.51	140	2.36	60	1,083	19.34	190	2.56	65	2.96	75	3,207	14,264	2.64	1.20
140-60-0200	5.51	140	2.36	60	1,142	20.39	200	2.63	67	2.88	73	3,290	14,635	2.78	1.26
140-60-0220	5.51	140	2.36	60	1,256	22.47	220	2.63	67	2.89	73	3,626	16,129	2.83	1.29
140-60-0240	5.51	140	2.36	60	1,370	24.46	240	2.81	71	2.71	69	3,709	16,500	3.16	1.43
140-60-0260	5.51	140	2.36	60	1,484	26.50	260	2.80	71	2.71	69	4,030	17,927	3.22	1.46
140-60-0280	5.51	140	2.36	60	1,600	28.57	280	2.82	72	2.70	68	4,309	19,170	3.30	1.50
140-60-0300	5.51	140	2.36	60	1,712	30.63	300	2.83	72	2.68	68	4,586	20,400	3.39	1.54
140-60-0350	5.51	140	2.36	60	2,000	35.71	350	3.01	76	2.50	64	5,005	22,264	3.82	1.73
140-60-0400	5.51	140	2.36	60	2,283	40.84	400	3.04	77	2.47	63	5,648	25,125	4.00	1.82
140-60-0450	5.51	140	2.36	60	2,569	45.96	450	3.10	79	2.41	61	6,199	27,574	4.23	1.92
140-60-0500	5.51	140	2.36	60	2,854	51.06	500	3.34	85	2.17	55	6,196	27,563	4.82	2.19
170 (length in mm)															
170-60-0030	6.69	170	2.36	60	171	3.06	30	1.80	46	4.89	124	838	3,726	1.09	0.49
170-60-0040	6.69	170	2.36	60	228	4.08	40	2.02	51	4.67	119	1,067	4,748	1.35	0.61
170-60-0050	6.69	170	2.36	60	285	5.10	50	2.09	53	4.60	117	1,313	5,840	1.48	0.67

COILOVER (METRIC) | 60mm I.D. Continued

Part Number	Length		Inside Diameter		Rate			Block Height		Travel		Load at Block Height		Weight	
	inch	mm	inch	mm	lbs/inch	kg/mm	N/mm	inch	mm	inch	mm	lbs	N	lbs	kg
170 (length in mm)															
170-60-0060	6.69	170	2.36	60	342	6.12	60	2.20	56	4.49	114	1,538	6,840	1.65	0.75
170-60-0070	6.69	170	2.36	60	400	7.14	70	2.58	66	4.11	104	1,643	7,310	2.11	0.96
170-60-0080	6.69	170	2.36	60	457	8.18	80	2.51	64	4.18	106	1,910	8,496	2.10	0.95
170-60-0090	6.69	170	2.36	60	514	9.19	90	2.72	69	3.98	101	2,044	9,090	2.40	1.09
170-60-0100	6.69	170	2.36	60	571	10.21	100	2.71	69	3.99	101	2,276	10,126	2.45	1.11
170-60-0110	6.69	170	2.36	60	628	11.21	110	2.72	69	3.98	101	2,498	11,110	2.52	1.14
170-60-0120	6.69	170	2.36	60	685	12.23	120	2.75	70	3.94	100	2,702	12,021	2.61	1.18
170-60-0130	6.69	170	2.36	60	742	13.27	130	2.78	71	3.91	99	2,904	12,919	2.70	1.22
170-60-0140	6.69	170	2.36	60	800	14.28	140	3.05	77	3.65	93	2,916	12,971	3.10	1.41
170-60-0150	6.69	170	2.36	60	856	15.31	150	3.10	79	3.59	91	3,074	13,674	3.23	1.47
170-60-0160	6.69	170	2.36	60	913	16.33	160	3.16	80	3.53	90	3,226	14,348	3.37	1.53
170-60-0170	6.69	170	2.36	60	970	17.35	170	3.22	82	3.47	88	3,370	14,992	3.50	1.59
170-60-0180	6.69	170	2.36	60	1,027	18.34	180	3.09	78	3.61	92	3,708	16,493	3.35	1.52
170-60-0190	6.69	170	2.36	60	1,083	19.34	190	3.14	80	3.55	90	3,853	17,138	3.49	1.58
170-60-0200	6.69	170	2.36	60	1,142	20.39	200	3.23	82	3.47	88	3,959	17,613	3.66	1.66
170-60-0220	6.69	170	2.36	60	1,256	22.47	220	3.43	87	3.27	83	4,104	18,255	4.05	1.84
170-60-0240	6.69	170	2.36	60	1,370	24.46	240	3.40	86	3.30	84	4,519	20,100	4.09	1.86
170-60-0260	6.69	170	2.36	60	1,484	26.50	260	3.60	91	3.09	79	4,591	20,423	4.52	2.05
170-60-0280	6.69	170	2.36	60	1,600	28.57	280	3.60	91	3.10	79	4,951	22,022	4.60	2.09
170-60-0300	6.69	170	2.36	60	1,712	30.63	300	3.59	91	3.10	79	5,314	23,640	4.67	2.12
200 (length in mm)															
200-60-0030	7.87	200	2.36	60	171	3.06	30	2.29	58	5.58	142	956	4,254	1.49	0.67
200-60-0040	7.87	200	2.36	60	228	4.08	40	2.51	64	5.37	136	1,226	5,454	1.78	0.81
200-60-0050	7.87	200	2.36	60	285	5.10	50	2.56	65	5.31	135	1,517	6,750	1.93	0.88
200-60-0060	7.87	200	2.36	60	342	6.12	60	2.92	74	4.95	126	1,697	7,550	2.40	1.09
200-60-0070	7.87	200	2.36	60	400	7.14	70	2.81	72	5.06	129	2,022	8,995	2.37	1.07
200-60-0080	7.87	200	2.36	60	457	8.18	80	3.01	76	4.86	124	2,222	9,882	2.67	1.21
200-60-0090	7.87	200	2.36	60	514	9.19	90	3.21	82	4.66	118	2,396	10,656	2.99	1.36
200-60-0100	7.87	200	2.36	60	571	10.21	100	3.18	81	4.69	119	2,679	11,915	3.03	1.38
200-60-0110	7.87	200	2.36	60	628	11.21	110	3.44	87	4.44	113	2,786	12,393	3.44	1.56
200-60-0120	7.87	200	2.36	60	685	12.23	120	3.45	88	4.42	112	3,028	13,470	3.53	1.60
250 (length in mm)															
250-60-0025	9.84	250	2.36	60	143	2.56	25	2.99	76	6.85	174	978	4,349	2.02	0.92
250-60-0030	9.84	250	2.36	60	171	3.06	30	2.88	73	6.97	177	1,193	5,308	2.00	0.91
250-60-0035	9.84	250	2.36	60	200	3.57	35	3.11	79	6.73	171	1,346	5,986	2.29	1.04
250-60-0040	9.84	250	2.36	60	228	4.08	40	3.09	79	6.75	172	1,542	6,860	2.34	1.06
250-60-0045	9.84	250	2.36	60	257	4.60	45	3.39	86	6.45	164	1,658	7,376	2.72	1.23
250-60-0050	9.84	250	2.36	60	285	5.10	50	3.41	87	6.44	163	1,837	8,173	2.81	1.27
250-60-0060	9.84	250	2.36	60	342	6.12	60	3.50	89	6.34	161	2,173	9,668	3.04	1.38
250-60-0070	9.84	250	2.36	60	400	7.14	70	3.99	101	5.85	149	2,338	10,402	3.74	1.70
250-60-0080	9.84	250	2.36	60	457	8.18	80	3.86	98	5.98	152	2,734	12,160	3.70	1.68
250-60-0090	9.84	250	2.36	60	514	9.19	90	4.09	104	5.75	146	2,956	13,148	4.11	1.86
250-60-0100	9.84	250	2.36	60	571	10.21	100	4.36	111	5.49	139	3,133	13,936	4.58	2.08
250-60-0110	9.84	250	2.36	60	628	11.21	110	4.33	110	5.51	140	3,461	15,397	4.66	2.11
250-60-0120	9.84	250	2.36	60	685	12.23	120	4.63	118	5.21	132	3,572	15,888	5.20	2.36
300 (length in mm)															
300-60-0020	11.81	300	2.36	60	114	2.04	20	3.24	82	8.57	218	979	4,355	2.12	0.96
300-60-0025	11.81	300	2.36	60	143	2.56	25	3.37	86	8.44	214	1,205	5,361	2.35	1.06
300-60-0030	11.81	300	2.36	60	171	3.06	30	3.57	91	8.24	209	1,412	6,280	2.64	1.20
300-60-0035	11.81	300	2.36	60	200	3.57	35	3.83	97	7.98	203	1,594	7,092	3.00	1.36
300-60-0040	11.81	300	2.36	60	228	4.08	40	4.15	105	7.66	195	1,750	7,786	3.43	1.56
300-60-0045	11.81	300	2.36	60	257	4.60	45	4.11	105	7.70	196	1,978	8,798	3.50	1.59
300-60-0050	11.81	300	2.36	60	285	5.10	50	4.51	114	7.31	186	2,086	9,279	4.03	1.83
300-60-0060	11.81	300	2.36	60	342	6.12	60	4.56	116	7.25	184	2,485	11,052	4.29	1.94
300-60-0070	11.81	300	2.36	60	400	7.14	70	5.09	129	6.72	171	2,684	11,941	5.15	2.33
300-60-0080	11.81	300	2.36	60	457	8.18	80	5.32	135	6.49	165	2,965	13,188	5.62	2.55

COILOVER (METRIC) | 60mm I.D. Continued

Part Number	Length		Inside Diameter		Rate			Block Height		Travel		Load at Block Height		Weight	
	inch	mm	inch	mm	lbs/inch	kg/mm	N/mm	inch	mm	inch	mm	lbs	N	lbs	kg
300 (length in mm)															
300-60-0090	11.81	300	2.36	60	514	9.19	90	5.16	131	6.66	169	3,420	15,215	5.56	2.52
300-60-0100	11.81	300	2.36	60	571	10.21	100	5.46	139	6.35	161	3,628	16,140	6.15	2.79
350 (length in mm)															
350-60-0020	13.78	350	2.36	60	114	2.04	20	3.65	93	10.13	257	1,157	5,146	2.47	1.12
350-60-0025	13.78	350	2.36	60	143	2.56	25	4.20	107	9.58	243	1,367	6,081	3.12	1.42
350-60-0030	13.78	350	2.36	60	171	3.06	30	4.40	112	9.38	238	1,607	7,148	3.46	1.57
350-60-0035	13.78	350	2.36	60	200	3.57	35	5.15	131	8.63	219	1,724	7,669	4.40	1.99
350-60-0040	13.78	350	2.36	60	228	4.08	40	5.03	128	8.75	222	1,999	8,893	4.40	2.00
350-60-0045	13.78	350	2.36	60	257	4.60	45	4.96	126	8.82	224	2,267	10,083	4.45	2.02
350-60-0050	13.78	350	2.36	60	285	5.10	50	5.36	136	8.42	214	2,403	10,690	5.06	2.29
350-60-0055	13.78	350	2.36	60	314	5.61	55	5.38	137	8.40	213	2,639	11,738	5.19	2.36
Tender/Linear															
35-60-65	2.36	60	2.36	60	371	6.64	65	1.26	32	2.09	53	775	3,447	1.37	0.62
40-60-20	2.17	55	2.36	60	114	3.06	20	1.50	38	2.48	63	422	1,878	1.81	0.82
40-60-30	2.56	65	2.36	60	171	4.10	30	1.93	49	2.44	62	564	2,510	2.09	0.95
40-60-40	2.95	75	2.36	60	228	5.11	40	1.61	41	2.36	60	679	3,020	1.90	0.86
40-60-50	2.68	68	2.36	60	285	6.14	50	1.34	34	2.48	63	854	3,798	1.45	0.66
40-60-55	2.68	68	2.36	60	314	7.14	55	1.46	37	1.30	33	940	4,183	1.59	0.72
40-60-60	2.60	66	2.36	60	342	3.06	60	1.50	38	2.87	73	490	2,178	1.81	0.82
40-60-70	2.56	65	2.36	60	399	1.02	70	0.94	24	3.15	80	180	800	0.90	0.41
50-60-20	3.07	78	2.36	60	114	1.02	20	0.94	24	3.94	100	225	1,000	0.90	0.41
50-60-30	3.54	90	2.36	60	171	3.05	30	2.16	55	1.38	35	511	2,275	0.88	0.40
50-60-0065	3.35	85	2.36	60	371	6.63	65	1.78	45	1.57	40	180	800	0.66	0.30
60-60-0030	3.98	101	2.36	60	171	3.05	30	2.41	61	1.57	40	270	1,200	0.66	0.30
60-60-0040	4.37	111	2.36	60	229	4.09	40	2.80	71	1.57	40	360	1,600	1.32	0.60
60-60-0050	3.98	101	2.36	60	286	5.11	50	2.41	61	1.57	40	450	2,000	1.10	0.50
60-60-0060	3.82	97	2.36	60	343	6.13	60	2.25	57	1.57	40	495	2,200	1.10	0.50
60-60-0070	2.76	70	2.36	60	400	7.14	70	1.19	30	1.57	40	540	2,400	1.21	0.55
70-60-0030	4.37	111	2.36	60	171	3.05	30	2.80	71	1.57	40	629	2,800	0.88	0.40
80-60-0010	4.09	104	2.36	60	57	1.02	10	2.12	54	1.97	50	225	1,000	1.10	0.50
100-60-0010	4.88	124	2.36	60	57	1.02	10	2.91	74	1.97	50	337	1,500	1.06	0.48
Tender/Progressive															
50-60-0040/0120	4.00	102	2.36	60	229 / 686	4.08 / 12.25	40/120	2.09	53	1.97	50	899	4,000	2.12	0.96
50-60-0060/0150	4.76	121	2.36	60	343 / 857	6.12 / 15.30	60/150	2.70	69	2.07	53	1,169	5,200	2.76	1.25
Helper															
HELPER60	2.95	75	2.36	60	11	0.20	2	0.49	13	2.36	60	27	120	0.29	0.13
Spring Coupler															
1-60-00															
Adapter															
ADAPTER60-250															

COILOVER (METRIC) | 65mm I.D.

Part Number	Length		Inner Diameter		Rate			Block Height		Travel		Load at Block Height		Weight	
	inch	mm	inch	mm	lbs/inch	kg/mm	N/mm	inch	mm	inch	mm	lbs	N	lbs	kg
180 (length in mm)															
180-065-T060	7.09	180	2.56	65	336	6.01	59	2.42	61	4.67	119	1,569	6,979	2.01	0.91
180-065-T070	7.09	180	2.56	65	392	7.01	69	2.81	71	4.27	109	1,676	7,455	2.53	1.15
180-065-T080	7.09	180	2.56	65	448	8.01	78	2.74	70	4.35	110	1,948	8,666	2.53	1.15
180-065-T090	7.09	180	2.56	65	514	9.19	90	2.93	74	4.16	106	2,096	9,323	2.84	1.29
180-065-T100	7.09	180	2.56	65	560	10.00	98	2.92	74	4.17	106	2,335	10,388	2.89	1.31
180-065-T110	7.09	180	2.56	65	616	11.02	108	3.16	80	3.92	100	2,418	10,756	3.28	1.49
180-065-T120	7.09	180	2.56	65	672	12.00	118	3.17	81	3.91	99	2,630	11,701	3.37	1.53
200 (length in mm)															
200-065-T030	7.87	200	2.56	65	171	3.06	30	2.05	52	5.83	148	997	4,438	1.32	0.60
200-065-T035	7.87	200	2.56	65	200	3.57	35	2.24	57	5.63	143	1,122	4,993	1.54	0.70
200-065-T040	7.87	200	2.56	65	224	4.01	39	2.53	64	5.34	136	1,196	5,323	1.94	0.88
200-065-T045	7.87	200	2.56	65	257	4.60	45	2.52	64	5.35	136	1,380	6,143	1.98	0.90
200-065-T050	7.87	200	2.56	65	280	5.00	49	2.81	71	5.06	129	1,418	6,308	2.33	1.06
200-065-T055	7.87	200	2.56	65	314	5.61	55	2.80	71	5.08	129	1,588	7,068	2.42	1.10
200-065-T060	7.87	200	2.56	65	336	6.01	59	2.92	74	4.95	126	1,663	7,402	2.57	1.17
200-065-T070	7.87	200	2.56	65	392	7.01	69	3.06	78	4.82	122	1,888	8,403	2.82	1.28
200-065-T080	7.87	200	2.56	65	448	8.01	78	3.24	82	4.64	118	2,078	9,245	3.15	1.43
200-065-T090	7.87	200	2.56	65	514	9.19	90	3.44	88	4.43	113	2,232	9,933	3.50	1.59
200-065-T100	7.87	200	2.56	65	560	10.00	98	3.41	87	4.46	113	2,498	11,115	3.56	1.62
200-065-T110	7.87	200	2.56	65	616	11.02	108	3.40	86	4.47	114	2,753	12,253	3.63	1.65
200-065-T120	7.87	200	2.56	65	672	12.00	118	3.67	93	4.21	107	2,827	12,578	4.09	1.86
200-065-T130	7.87	200	2.56	65	741	13.26	130	3.62	92	4.25	108	3,151	14,024	4.18	1.90
200-065-T140	7.87	200	2.56	65	784	14.00	137	3.72	95	4.15	106	3,256	14,489	4.31	1.96
200-065-T160	7.87	200	2.56	65	896	16.03	157	3.80	96	4.08	104	3,653	16,257	4.60	2.09
200-065-T180	7.87	200	2.56	65	1,027	18.34	180	3.86	98	4.02	102	4,116	18,315	4.84	2.20
200-065-T190	7.87	200	2.56	65	1,083	19.34	190	3.94	100	3.94	100	4,274	19,021	5.06	2.30
200-065-T200	7.87	200	2.56	65	1,140	20.35	200	4.02	102	3.86	98	4,391	19,540	5.28	2.40
230 (length in mm)															
230-065-T030	9.06	230	2.56	65	171	3.06	30	2.56	65	6.50	165	1,114	4,958	1.85	0.84
230-065-T035	9.06	230	2.56	65	196	3.50	34	3.13	80	5.93	151	1,161	5,167	2.49	1.13
230-065-T040	9.06	230	2.56	65	228	4.08	40	3.03	77	6.02	153	1,372	6,105	2.49	1.13
230-065-T230	9.06	230	2.56	65	1,311	23.41	230	5.12	130	3.94	100	5,166	22,989	7.52	3.42
250 (length in mm)															
250-065-T050	9.84	250	2.56	65	280	5.00	49	3.72	95	6.12	156	1,714	7,627	3.37	1.53
250-065-T060	9.84	250	2.56	65	336	6.01	59	3.79	96	6.05	154	2,032	9,044	3.61	1.64
250-065-T070	9.84	250	2.56	65	400	7.14	70	3.90	99	4.27	151	2,381	10,597	3.87	1.76
250-065-T080	9.84	250	2.56	65	447	8.00	78	4.12	105	5.73	145	2,565	11,415	4.32	1.96
250-065-T100	9.84	250	2.56	65	560	10.00	98	4.60	117	5.24	133	2,935	13,060	5.27	2.39
250-065-T110	9.84	250	2.56	65	627	11.19	110	4.49	114	5.35	136	3,359	14,949	5.24	2.38
250-065-T130	9.84	250	2.56	65	741	13.26	130	4.49	114	5.35	136	3,978	17,703	5.46	2.48

COILOVER (METRIC) | 70mm I.D.

Part Number	Length		Inner Diameter		Rate			Block Height		Travel		Load at Block Height		Weight	
	inch	mm	inch	mm	lbs/inch	kg/mm	N/mm	inch	mm	inch	mm	lbs	N	lbs	kg
200 (length in mm)															
200-70-0050	7.87	200	2.75	70	285	5.10	50	2.25	57	5.62	143	1,605	7,139	2.03	0.92
200-70-0055	7.87	200	2.75	70	314	5.61	55	2.49	63	5.38	137	1,691	7,521	2.37	1.08
200-70-0060	7.87	200	2.75	70	342	6.12	60	2.55	65	5.33	135	1,825	8,119	2.49	1.13
200-70-0065	7.87	200	2.75	70	371	6.64	65	2.60	66	5.27	134	1,956	8,702	2.61	1.18
200-70-0070	7.87	200	2.75	70	400	7.14	70	2.66	68	5.21	132	2,084	9,271	2.73	1.24
200-70-0075	7.87	200	2.75	70	428	7.66	75	2.74	70	5.13	130	2,199	9,780	2.88	1.31
200-70-0080	7.87	200	2.75	70	457	8.18	80	2.80	71	5.08	129	2,319	10,316	3.01	1.37
200-70-0085	7.87	200	2.75	70	485	8.68	85	2.88	73	5.00	127	2,424	10,784	3.18	1.44
200-70-0090	7.87	200	2.75	70	514	9.19	90	2.99	76	4.89	124	2,512	11,172	3.37	1.53
200-70-0100	7.87	200	2.75	70	571	10.21	100	2.94	75	4.93	125	2,816	12,525	3.39	1.54
200-70-0120	7.87	200	2.75	70	685	12.23	120	3.17	80	4.71	120	3,225	14,348	3.90	1.77
225 (length in mm)															
225-70-0050	8.86	225	2.75	70	285	5.10	50	2.71	69	6.15	156	1,756	7,813	2.59	1.17
225-70-0055	8.86	225	2.75	70	314	5.61	55	2.72	69	6.13	156	1,927	8,570	2.67	1.21
225-70-0060	8.86	225	2.75	70	342	6.12	60	3.01	76	5.85	149	2,005	8,918	3.10	1.41
225-70-0065	8.86	225	2.75	70	371	6.64	65	3.07	78	5.79	147	2,148	9,555	3.24	1.47
225-70-0070	8.86	225	2.75	70	400	7.14	70	3.13	80	5.72	145	2,288	10,176	3.39	1.54
225-70-0075	8.86	225	2.75	70	428	7.66	75	3.20	81	5.66	144	2,424	10,781	3.54	1.61
225-70-0080	8.86	225	2.75	70	457	8.18	80	3.29	84	5.57	141	2,545	11,319	3.72	1.69
225-70-0085	8.86	225	2.75	70	485	8.68	85	3.38	86	5.48	139	2,660	11,832	3.91	1.78
225-70-0090	8.86	225	2.75	70	514	9.19	90	3.47	88	5.39	137	2,770	12,320	4.11	1.86
225-70-0100	8.86	225	2.75	70	571	10.21	100	3.43	87	5.43	138	3,101	13,793	4.15	1.88
225-70-0110	8.86	225	2.75	70	628	11.21	110	3.64	92	5.22	133	3,279	14,586	4.59	2.08
225-70-0120	8.86	225	2.75	70	685	12.23	120	3.62	92	5.24	133	3,590	15,971	4.66	2.11
250 (length in mm)															
250-70-0040	9.84	250	2.75	70	228	4.08	40	2.96	75	6.88	175	1,571	6,990	2.77	1.26
250-70-0045	9.84	250	2.75	70	257	4.60	45	2.94	75	6.90	175	1,772	7,884	2.82	1.28
250-70-0050	9.84	250	2.75	70	285	5.10	50	3.21	82	6.63	168	1,892	8,418	3.24	1.47
250-70-0055	9.84	250	2.75	70	314	5.61	55	3.24	82	6.60	168	2,074	9,226	3.35	1.52
250-70-0060	9.84	250	2.75	70	342	6.12	60	3.28	83	6.56	167	2,247	9,996	3.48	1.58
250-70-0065	9.84	250	2.75	70	371	6.64	65	3.33	85	6.51	165	2,418	10,756	3.61	1.64
250-70-0070	9.84	250	2.75	70	400	7.14	70	3.66	93	6.18	157	2,469	10,985	4.16	1.89
250-70-0075	9.84	250	2.75	70	428	7.66	75	3.74	95	6.11	155	2,615	11,633	4.34	1.97
250-70-0080	9.84	250	2.75	70	457	8.18	80	3.83	97	6.01	153	2,745	12,209	4.56	2.07
250-70-0085	9.84	250	2.75	70	485	8.68	85	3.91	99	5.94	151	2,881	12,816	4.74	2.15
250-70-0090	9.84	250	2.75	70	514	9.19	90	4.01	102	5.84	148	3,000	13,343	4.97	2.25
250-70-0100	9.84	250	2.75	70	571	10.21	100	3.94	100	5.90	150	3,370	14,990	4.99	2.26
250-70-0110	9.84	250	2.75	70	628	11.21	110	4.17	106	5.68	144	3,565	15,857	5.50	2.49
250-70-0120	9.84	250	2.75	70	685	12.23	120	4.15	105	5.69	145	3,899	17,345	5.58	2.53
300 (length in mm)															
300-70-0020	11.81	300	2.75	70	114	2.04	20	2.90	74	8.92	226	1,018	4,529	2.29	1.04
300-70-0025	11.81	300	2.75	70	143	2.56	25	2.97	76	8.84	224	1,261	5,611	2.50	1.13
300-70-0030	11.81	300	2.75	70	171	3.06	30	3.13	79	8.68	221	1,488	6,617	2.78	1.26
300-70-0035	11.81	300	2.75	70	200	3.57	35	3.32	84	8.49	216	1,697	7,546	3.11	1.41
300-70-0040	11.81	300	2.75	70	228	4.08	40	3.57	91	8.25	209	1,883	8,378	3.52	1.60
300-70-0045	11.81	300	2.75	70	257	4.60	45	3.86	98	7.95	202	2,042	9,085	4.01	1.82
300-70-0050	11.81	300	2.75	70	285	5.10	50	3.83	97	7.98	203	2,280	10,140	4.07	1.85
300-70-0055	11.81	300	2.75	70	314	5.61	55	4.18	106	7.63	194	2,396	10,656	4.67	2.12
300-70-0060	11.81	300	2.75	70	342	6.12	60	4.19	106	7.62	194	2,611	11,612	4.78	2.17

COILOVER (METRIC) | 70mm I.D.

Part Number	Length		Outside Diameter		Rate			Block Height		Travel		Load at Block Height		Weight	
	inch	mm	inch	mm	lbs/inch	kg/mm	N/mm	inch	mm	inch	mm	lbs	N	lbs	kg
350 (length in mm)															
350-70-0020	13.78	350	2.75	70	114	2.04	20	3.61	92	10.17	258	1,162	5,167	3.04	1.38
350-70-0025	13.78	350	2.75	70	143	2.56	25	3.65	93	10.13	257	1,446	6,431	3.26	1.48
350-70-0030	13.78	350	2.75	70	171	3.06	30	4.18	106	9.60	244	1,645	7,316	4.04	1.83
350-70-0035	13.78	350	2.75	70	200	3.57	35	4.39	112	9.39	238	1,876	8,346	4.47	2.03
350-70-0040	13.78	350	2.75	70	228	4.08	40	4.65	118	9.13	232	2,084	9,272	4.97	2.25
350-70-0045	13.78	350	2.75	70	257	4.60	45	4.58	116	9.20	234	2,363	10,513	5.01	2.27
350-70-0050	13.78	350	2.75	70	285	5.10	50	4.92	125	8.86	225	2,530	11,253	5.63	2.55
350-70-0055	13.78	350	2.75	70	314	5.61	55	4.91	125	8.87	225	2,784	12,386	5.75	2.61
350-70-0060	13.78	350	2.75	70	342	6.12	60	5.31	135	8.46	215	2,900	12,900	6.50	2.95
Tender/Linear															
40-70-0030	3.19	81	2.75	70	171	3.06	30	1.61	41	1.57	40	270	1,200	2.01	0.91
40-70-0040	2.99	76	2.75	70	229	4.10	40	1.42	36	1.57	40	360	1,600	1.92	0.87
40-70-0060	2.64	67	2.75	70	343	6.14	60	1.06	27	1.57	40	540	2,400	1.41	0.64
60-70-0045	3.66	93	2.75	70	257	4.60	45	1.30	33	2.36	60	607	2,700	1.61	0.73
70-70-0015	3.78	96	2.75	70	86	1.54	15	1.02	26	2.76	70	236	1,050	1.26	0.57
70-70-0030	3.70	94	2.75	70	171	3.06	30	0.94	24	2.76	70	472	2,100	1.17	0.53
70-70-0034	4.37	111	2.75	70	194	3.47	34	1.61	41	2.76	70	535	2,380	2.01	0.91
70-70-0038	4.41	112	2.75	70	217	3.88	38	1.65	42	2.76	70	598	2,660	1.85	0.84
70-70-0046	4.21	107	2.75	70	263	4.70	46	1.46	37	2.76	70	724	3,220	1.61	0.73
70-70-0050	4.92	125	2.75	70	286	5.11	50	2.17	55	2.76	70	787	3,500	2.47	1.12
70-70-0060	4.49	114	2.75	70	343	6.14	60	1.73	44	2.76	70	944		2.14	0.97
Helper															
HELPER70	3.94	100	2.75	70	17	0.30	3	0.78	20	3.16	80	54	241	0.57	0.26
Spring Coupler															
1-70-00															





F3 | Standard

Part Number	Length		Inner Diameter		Rate			Block Height		Travel		Load at Block Height		Weight	
	inch	mm	inch	mm	lbs/inch	kg/mm	N/mm	inch	mm	inch	mm	lbs	N	lbs	kg
F3 Standard															
F3 C400	5.55	141	2.36	36	400	7.14	70	2.91	74	2.64	67	1,050	4,672	1.10	0.50
F3 C450	5.47	139	2.36	36	450	8.05	79	3.07	78	2.40	61	1,080	4,806	1.19	0.54
F3 C500	5.35	136	2.36	36	500	8.94	88	3.03	77	2.32	59	1,150	5,117	1.19	0.54
F3 C550	5.28	134	2.36	36	548	9.80	96	3.11	79	2.17	55	1,190	5,295	1.30	0.59
F3 C600	5.24	133	2.36	36	600	10.71	105	2.95	75	2.28	58	1,370	6,096	1.30	0.59
F3 C700	5.12	130	2.36	36	700	12.50	123	3.11	79	2.01	51	1,410	6,274	1.41	0.64
F3 C800	5.04	128	2.36	36	800	14.28	140	3.07	78	1.97	50	1,571	6,986	1.41	0.64
F3 C900	5.00	127	2.36	36	900	16.07	158	2.99	76	2.01	51	1,821	8,099	1.50	0.68
F3 C1000	4.96	126	2.36	36	1,000	17.85	175	3.11	79	1.85	47	1,841	8,188	1.61	0.73
F3 C1100	4.92	125	2.36	36	1,100	19.64	193	3.15	80	1.77	45	1,931	8,588	1.61	0.73
F3 C1200	4.88	124	2.36	36	1,200	21.42	210	3.27	83	1.61	41	1,911	8,499	1.70	0.77
F3 C1300	4.84	123	2.36	36	1,300	23.22	228	3.27	83	1.57	40	2,021	8,989	1.81	0.82
F3 C1400	4.84	123	2.36	36	1,400	25.00	245	3.19	81	1.65	42	2,251	10,012	1.70	0.77
F3 C1500	4.80	122	2.36	36	1,500	26.79	263	3.15	80	1.65	42	2,481	11,036	1.70	0.77
F3 C1600	4.80	122	2.36	36	1,600	28.57	280	3.31	84	1.50	38	2,381	10,591	1.90	0.86
F3 C1800	4.76	121	2.36	36	1,800	32.14	315	3.23	82	1.54	39	2,761	12,281	1.90	0.86
F3 C2000	4.76	121	2.36	36	2,000	35.71	350	3.27	83	1.50	38	2,991	13,305	1.90	0.86
F3 C2200	4.72	120	2.36	36	2,200	39.28	385	3.12	79	1.61	41	3,505	15,591	1.78	0.81

F3 | Short

Part Number	Length		Inner Diameter		Rate			Block Height		Travel		Load at Block Height		Weight	
	inch	mm	inch	mm	lbs/inch	kg/mm	N/mm	inch	mm	inch	mm	lbs	N	lbs	kg
F3 Short															
40494	4.37	111	1.42	36	600	10.71	105	2.32	59	2.05	52	1,236	5,500	0.93	0.42
40495	4.00	102	1.42	36	650	11.61	114	2.17	55	1.89	48	1,236	5,500	0.86	0.39
40496	3.82	97	1.42	36	700	12.50	123	2.05	52	1.77	45	1,236	5,500	0.82	0.37
40497	3.58	91	1.42	36	748	13.35	131	1.93	49	1.65	42	1,236	5,500	0.77	0.35
40498	3.39	86	1.42	36	800	14.28	140	1.85	47	1.54	39	1,236	5,500	0.73	0.33
40499	3.23	82	1.42	36	850	15.17	149	1.77	45	1.46	37	1,236	5,500	0.71	0.32
40500	3.00	76	1.42	36	900	16.07	158	1.69	43	1.38	35	1,236	5,500	0.66	0.30
40501	2.91	74	1.42	36	950	16.96	166	1.61	41	1.30	33	1,236	5,500	0.64	0.29
40502	2.80	71	1.42	36	1,000	17.85	175	1.57	40	1.22	31	1,236	5,500	0.62	0.28
40503	2.68	68	1.42	36	1,050	18.75	184	1.50	38	1.18	30	1,236	5,500	0.60	0.27
40504	2.60	66	1.42	36	1,100	19.64	193	1.46	37	1.14	29	1,236	5,500	0.57	0.26
54587	2.48	63	1.42	36	1,148	20.50	201	1.42	36	1.06	27	1,236	5,500	0.55	0.25
54588	2.40	61	1.42	36	1,200	21.42	210	1.38	35	1.02	26	1,236	5,500	0.55	0.25
54589	2.32	59	1.42	36	1,250	22.32	219	1.34	34	0.98	25	1,236	5,500	0.53	0.24
54590	2.28	58	1.42	36	1,300	23.22	228	1.34	34	0.94	24	1,236	5,500	0.51	0.23

PRODUCTION PLANTS

EUROPE

Germany

Heinrich Eibach GmbH
Am Lennedamm 1
57413 Finnentrop
Phone +49 2721 511344
Fax +49 2721 511111
E-mail sales@eibach.de

NORTH AMERICA

United States of America

Eibach, Inc.
264 Mariah Circle
Corona, CA 92879 1751
Phone +1 951 256 8300
Fax +1 951 256 8333
E-mail sales@eibach.com

ASIA

China

Eibach Springs Taicang Ltd.
No. 63 Ningbo Road
Taicang, Jiangsu
China, 215400
Phone +86 512 8278 1666
Fax +86 512 8278 1660
E-mail eibach@eibach-china.com

ENGINEERING & SALES

Australia

Eibach Suspension Technology P.T.Y. Ltd.

3|4 Prosperity Parade
Warriewood NSW 2102
Phone +61 2 9999 3655
Fax +61 2 9999 3855
E-mail eibach@eibach.com.au

South Africa

Eibach South Africa P.T.Y. Ltd.

P.O. Box 2495
North End 6045
Port Elizabeth
Phone +27 41 451 5311
Fax +27 41 451 0196
E-mail sales@eibachsa.co.za

United Kingdom

Eibach UK

25, Swannington Road
Broughton Astley
Leicestershire LE9 6TU
Phone +44 1455 285850
Fax +44 1455 285853
E-mail sales@eibach.co.uk

