
#### **Included Tools / Components**

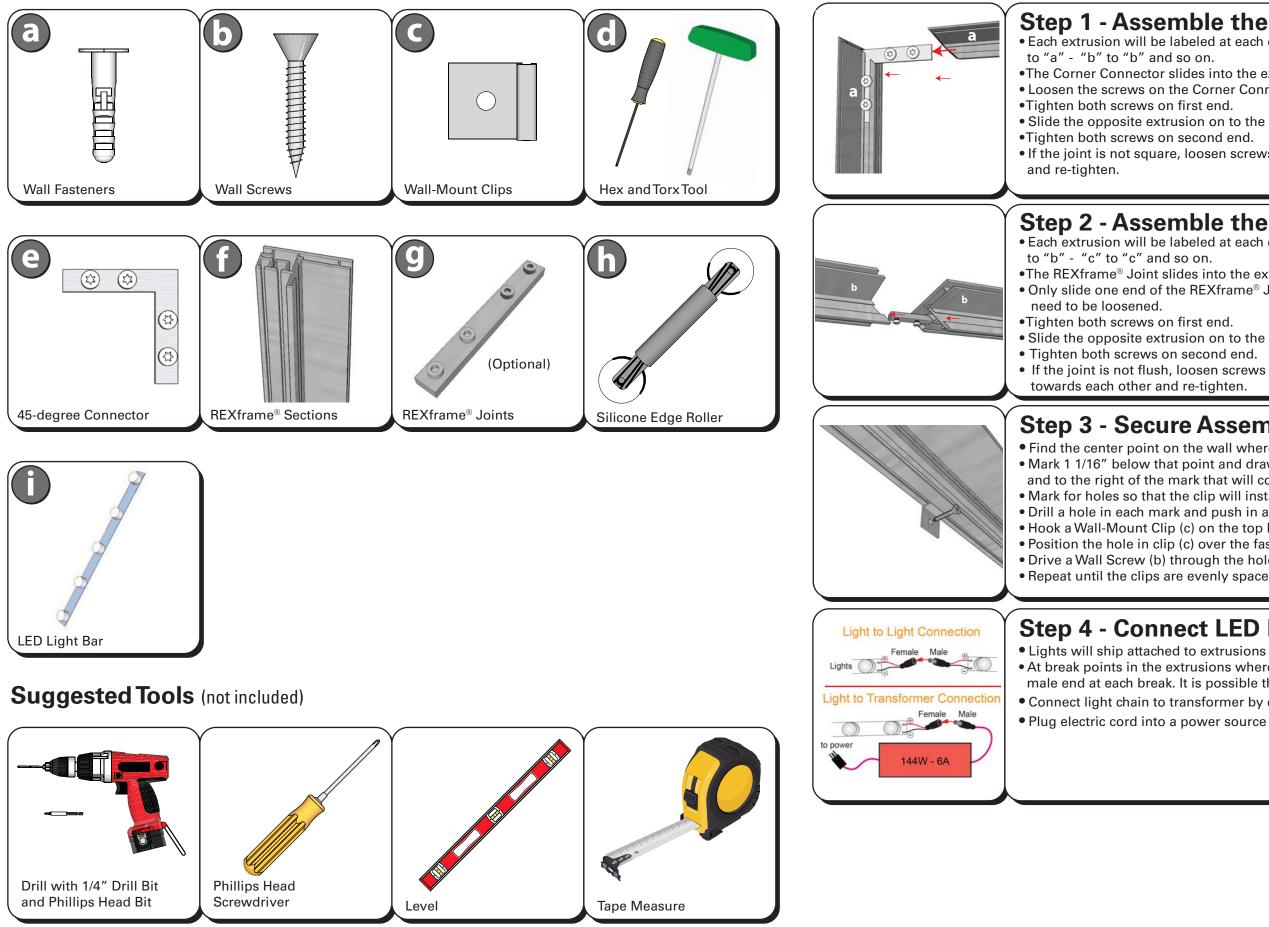

#### **Step 1 - Assemble the Frame**

**Assembly Instructions** 

- Each extrusion will be labeled at each connection point with a letter. "a" will attach
- •The Corner Connector slides into the extrusion channel as shown.
- Loosen the screws on the Corner Connector and slide one end in the channel.
- Slide the opposite extrusion on to the other end of the Corner Connector.
- If the joint is not square, loosen screws, push extrusions towards each other

# **Step 2 - Assemble the Frame** (for displays longer than 8') • Each extrusion will be labeled at each connection joint with a letter "b" will attach

- •The REXframe<sup>®</sup> Joint slides into the extrusion channel as show.
- Only slide one end of the REXframe<sup>®</sup> Joint in the channel half way. Screws may
- Slide the opposite extrusion on to the other end of the REXframe® Joint
- If the joint is not flush, loosen screws on one end, push extrusions


#### **Step 3 - Secure Assembled Frame to Wall**

- Find the center point on the wall where the top of the graphic will be.
- Mark 1 1/16" below that point and draw a level horizontal line to the left
- and to the right of the mark that will cover the width of the frame.
- Mark for holes so that the clip will install between the LED lights.
- Drill a hole in each mark and push in a wall fastener (a) in each hole.
- Hook a Wall-Mount Clip (c) on the top REXframe<sup>®</sup> (f) as shown.
- Position the hole in clip (c) over the fastener hole.
- Drive a Wall Screw (b) through the hole into the fastener.
- Repeat until the clips are evenly spaced on each side of the frame.

# **Step 4 - Connect LED Lights**

- At break points in the extrusions where in-line connectors are, connect the female to male end at each break. It is possible there will be no break points.
- Connect light chain to transformer by connecting the female end into the male end. Plug electric cord into a power source to check for connection issues.


#### Assembly Instructions (continued)

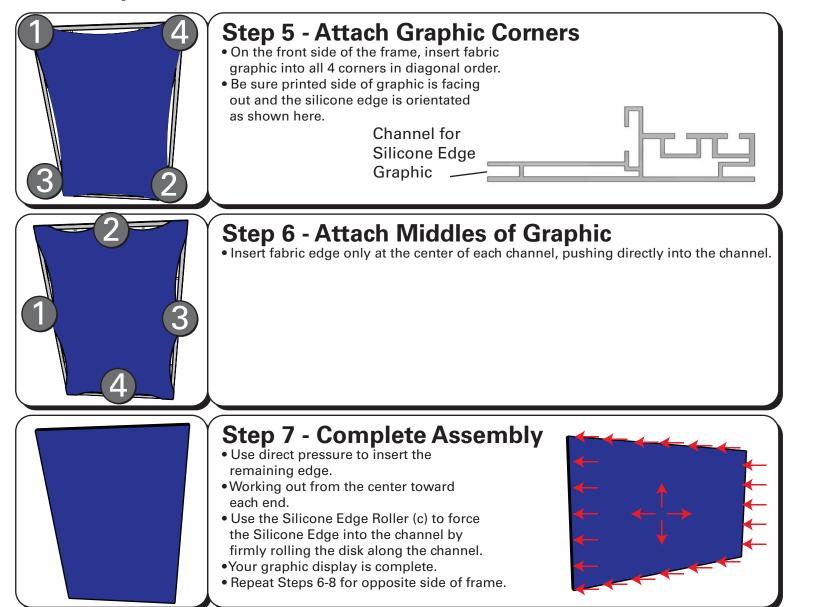

# **Assembly Instructions**

The REXframe<sup>®</sup> extruded aluminum frames used in the assembly of Garage Graphics' displays are ADA-compliant, making them ideal for use in public spaces. Fabrics used in the manufacture of our large-scale displays are fully fire resistant, using water-based inks that are OEKO-EX® Standard 100 certified. Illumination for our back lit displays uses UL-approved, low-voltage LED lighting.

#### **REXframe**<sup>®</sup> Profile Characteristics

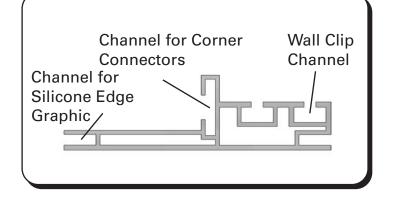

## **Graphic Care**

•To release the graphic from its channel, gently pull on the small tag located in the bottom right corner.

- Launder your graphic using Woolite® (or similar) with the washer set to gentle or delicate cycle.
- •Tumble dry on low heat.
- Store by gently folding the fabric and placing in a plastic bag.



# LARGER THAN LIFE

Discover a new way to see automotive art—with easy-to-install, wall-size images from your choice of celebrated artists.

6847 N 16th ST Omaha, NE 68112 P: (833) 830-0971 E: info@garagegraphics.net Garage Graphics<sup>®</sup>

## **Garage Graphics®**

# **Back Lit, Wall Mount Displays**



garagegraphics.net