




Technical Data

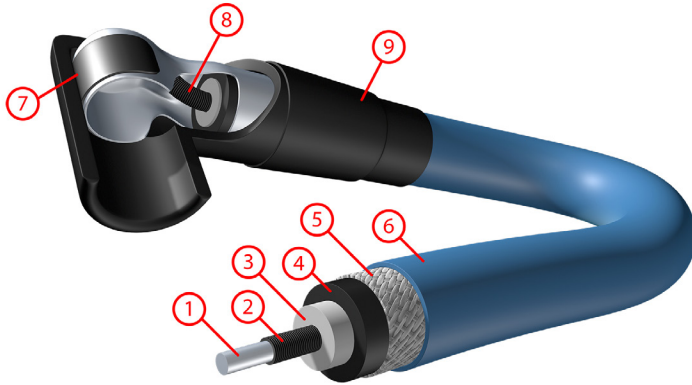

1. **Fiberglass/Aramid (Kevlar®) blend ferrite coated core**
2. **Stranded alloy** - TPI (Turns P/Inch) determined by wire design
3. **Silicone inner core** for strength, EMI/RFI control and break-down voltage
4. **Silicone outer core** for abrasion and heat resistance
5. **Fiberglass sleeving** rated @ 1000°F
6. **Additional silicone sleeving** on Scott wires provides added protection against heat and abrasion
7. **Stainless steel "snap-lock" tab** for positive lock to spark plug
8. **Bend crimp** for ultimate termination
9. **High temp silicone boot and heat shrinks** for added protection

Product Description

Wire Sets Include

Specifications

Application(s)

Available Color(s)