

TOW WITH COMFORT, CONFIDENCE, AND CONTROL

Firestone Ride-Rite Air Springs supports your vehicle for the long haul.



Representational image only.
Some kits may vary.

ABSORBS EXTREME SHOCK

Capable of withstanding sudden left-to-right or side-to-side changes in suspension travel.

AIR ONLY DESIGN

Smooth ride and high performance because we only use air. No stroke limiting bumper required.

WORRY-FREE MAINTENANCE

Durable bellow won't rip or pull apart when suspended on a lift.

LONG PRODUCT LIFE

Built to last using commercial grade steel plates with rolled crimp design, for a long life under your truck.

TOP SELLING RIDE-RITE™ KITS			
Model	Year	Air Leveling Rear Kit	No Drill Install
Chevrolet/GMC Pickup Trucks			
Silverado, Sierra 1500 (2WD, 4WD)	07-18	2430	🌀
1500 (2WD, 4WD)	19	2609	🌀
1500, 2500 (2WD, 4WD)	88-98	2025	
Silverado, Sierra 2500, 3500 HD (2WD, 4WD)	11-19	2596	🌀
Silverado, Sierra 2500, 3500 (2WD, 4WD)	01-10	2250	🌀
2500 (2WD, 4WD) with rear drum brakes	99-00	2025	
3500 (2WD, 4WD)	88-00	2025	
Dodge/Ram Pickup Trucks			
Ram 1500 (2WD, 4WD)	09-18	4185	🌀
Ram 1500 (2WD, 4WD)	94-01	2071	
Ram 1500 Mega Cab (2WD, 4WD)	06-08	2299	🌀
Ram 1500 (2WD, 4WD)	02-08	2286	🌀
Ram 2500 (2WD, 4WD)	14-19	2598	🌀
Ram 2500 (2WD, 4WD)	03-13	2299	🌀
Ram 3500 (2WD only)	13-19	2579	🌀
Ram 3500 (4WD only)	13-19	2560	🌀
Ram 3500 (2WD, 4WD)	03-12	2299	🌀
Dodge D+W 100,1500, 2500	69-02	2071*	

Model	Year	Air Leveling Rear Kit	No Drill Install
Ford Pickup Trucks			
F150 (2WD, 4WD) (not raptor of FX2)	15-19	2582	🌀
F150 (2WD, 4WD) (not raptor of FX2)	09-14	2525**	🌀
F150 (2WD, 4WD) (with B&W hitch only)	09-14	2542**	🌀
F150	97-04	2320	
F100-150	69-96	2071*	
F250, F350 (2WD, 4WD)	11-16	2597	🌀
F250, F350 (4WD) single wheel	17-19	2605	🌀
F250, F350 (2WD)	17-19	2600	🌀
F250, F350 (2WD, 4WD)	08-10	2550	🌀
F250, F350 over 8500 GVWR (2WD, 4WD) (not V10 gas w/extended cab & 8')	99-04	2550	🌀
F250, F350 over 8500 GVWR (2WD, 4WD)	69-98	2071*	
F350, F450 dually (4WD)	17-19	2604	🌀
Toyota Pickup Trucks			
Tundra (2WD, 4WD), TRD	07-18	2445	🌀



* 7.5" tire to frame minimum clearance

** 6" tire to frame minimum clearance

** 6" tire to frame minimum clearance

EDUCATE CUSTOMERS

Generating more air spring sales starts with education. People with hobbies that require towing do not always realize that they are not protecting their vehicle or precious cargo. When a customer asks about a hitch, trailer taillight bulb, or other towing-related product, ask if they have air springs. If they do not, these benefits can help you make the sale

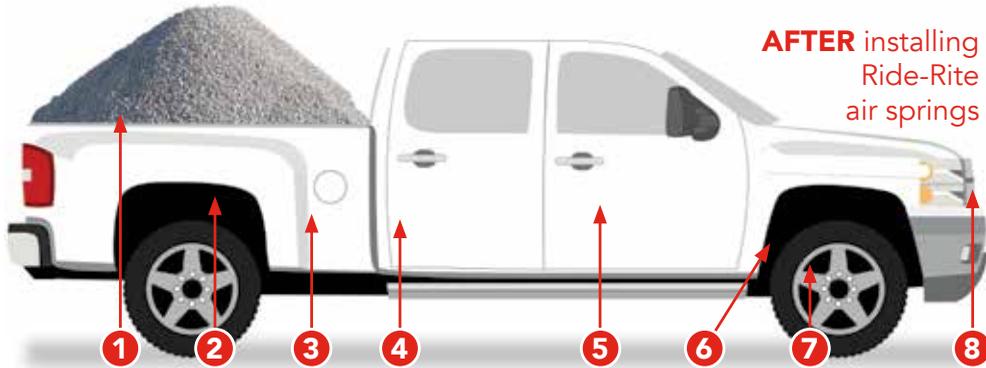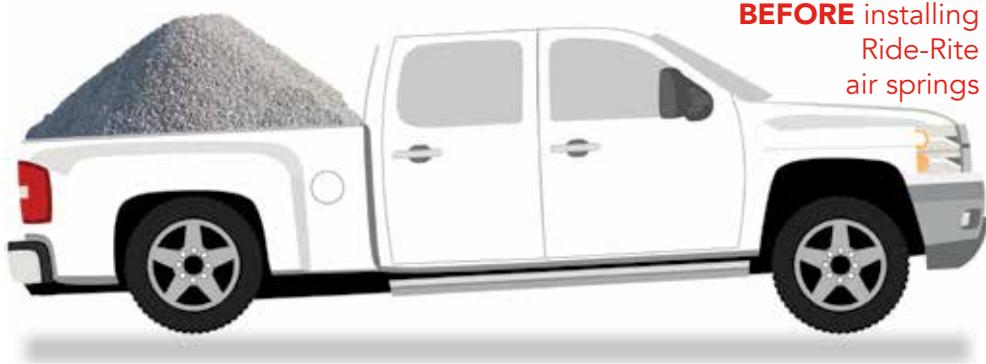

Benefits of Air Springs

- 1 Prevents unbalanced loads
- 2 Installs easily
- 3 Reduces bottoming out
- 4 Eliminates sag
- 5 Increases ride comfort
- 6 Improves steering control and braking
- 7 Preserves tires
- 8 Keeps headlights level

Firestone

THE FINISHING TOUCH TO AN AIR SPRING INSTALL

Firestone Ride-Rite™ Air Control Systems empower drivers to adjust their air springs with the push of a finger. Simply pick a control method, find the right kit and complete the easy install.

STEP 1 | CHOOSE ADJUSTMENT PREFERENCE



Switch Dashboard Mount

Wireless Remote



NEW! Wireless App

- New design with a two wire hook-up
- App for Apple & Android
- Mount anywhere compressor & ECU
- 2 memory presets



+ COMPATIBLE
WITH MOST AIR SPRING
SYSTEMS

**+ CONVENIENT
ONBOARD
AIR** 

+ ONE PUSH
PRESSURE
ADJUSTMENT 

**+ PRECISION
ENGINEERED
LEVELING** 

STEP 2 | FIND THE RIGHT KIT

		Light Duty	Standard Duty	Heavy Duty	Xtra	Xtreme
Single Leveling System Equal pressure to the springs on both sides This applies to most towables using a hitch. 	Analog 	2538 2497*	2158 2497*	2097 2497*	2266 2497*	2543
	Wireless App 	2610 Universal fit compatible with most vehicles. For use with any air spring kit that uses 1/4" tubing.				
Dual Leveling System Allows for side-to-side or front-to-back leveling. This applies to work trucks, in-bed campers and off-center loads. 	Analog 	N/A	2178 2497*	2219 2497*	2168 2530*	2549
	Wireless 	2581 2588*	2589 2588*	2590 2588*	2591 2588/2496*	2592 2588/2496*


*Mounting plate for vehicle pairs with kit number

STEP 3 | COMPLETE THE EASY INSTALL

- 1** Mount compressor to optional plate
 Mounting plates sold separately. PNs listed in red in product table above.



- 2** Clamp plate to frame



- 3** Run wires and air lines



Firestone